


SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : K15D
Model : MR20300FX/TCE CT1488BLFX/XAP
CT1991FX/SMS CT2088BWFX/GSU
CT2088BWFX/STR CT2188BWFX/XAX
CT21D8BWFX/XAX CT21D8BWFX/STR

SERVICE Manual

COLOR TELEVISION RECEIVER

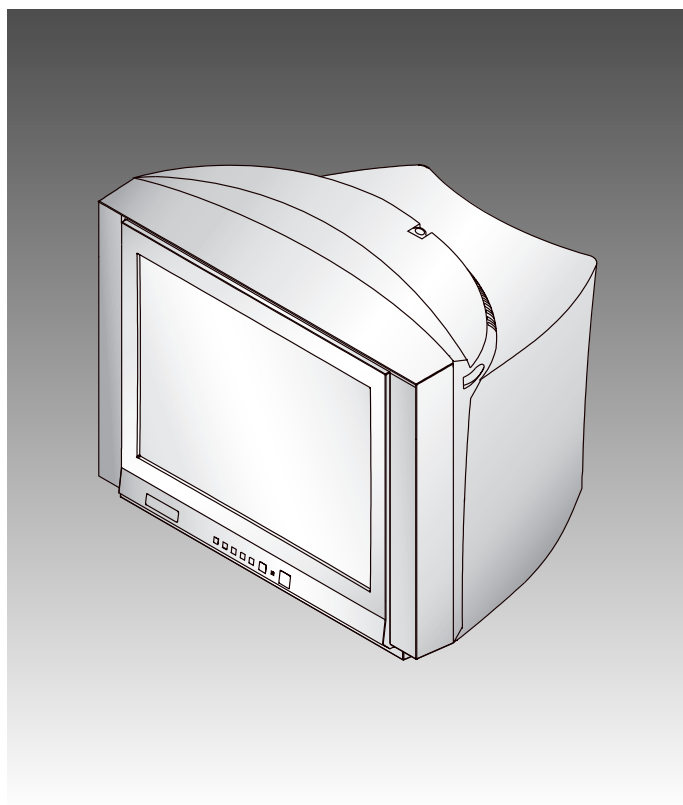

CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electrical Parts List
8. Block Diagram
9. Wiring Diagram
10. Schematic Diagrams



1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

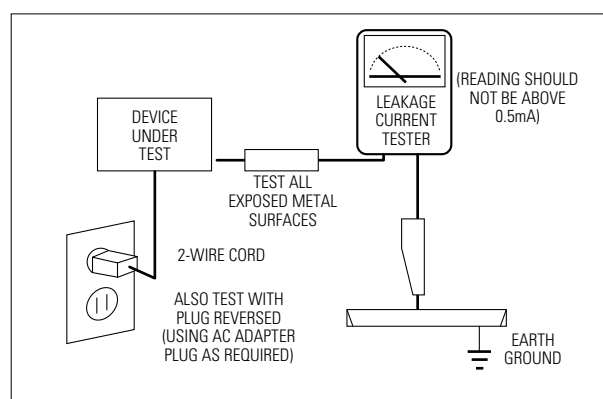


Fig. 1-1 AC Leakage Test



6. Antenna Cold Check:
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.
(X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.
13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.
15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

Components that are critical for safety are indicated in the circuit diagram by shading, () or ().
Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

CAUTION

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

2. Specifications and IC Data

2-1 Specifications

Television System:

MODEL	SYSTEM
CT	NTSC ONLY

Channels:

System Band	NTSC
VHF	2 - 13
UHF	14 - 69
CABLE	1 - 125

Intermediate Frequencies (MHz) :

SYSTEM IF Carrier Frequency	NTSC
Picture IF Carrier	45.75
Sound IF Carrier	41.25
Color Sub Carrier	42.18

Picture Tube:

14 Inch	A34KQV42X	14Inch
15 Inch	A36QDT351X	15Inch Flat
20 Inch	A48KRD82X	20Inch
21 Inch	A51KQJ63X	21Inch

Power Requirements:

AC 120V, 60Hz

Antenna Input Impedance:

VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type)

Speaker Impedance

8 ohm

2-2 IC Line Up

Table 2-1 IC Line-Up			
Loc. No	Specificatio	Description	Remark
IC201S	SPM458AN	TDA9377, English/Spanish/French	Philips
IC301	LA7840	VERTICAL OUTPUT	Sanyo
IC501	TDA6107Q	RGB DRIVE AMP	Philips
IC602	TDA7266M/TDA7266S	SOUND-AMP, TDA7266M (MONO) TDA7266S (STEREO)	Philips
IC801S	KA5Q0740RT (0765RT)	POWER IC (STR)	FIAIR CHILD
IC802	KA7632	CUSTOM REGULATOR (5V, 8V, 3.3V)	SEC
IC202	24C04	EEPROM	
PC801S	TCET1108 / LTV817B	PHOTO COUPLER	
ICS601	UPC1851B	Sound Processor (STEREO)	NEC

2-3 Semiconductor Base Diagrams


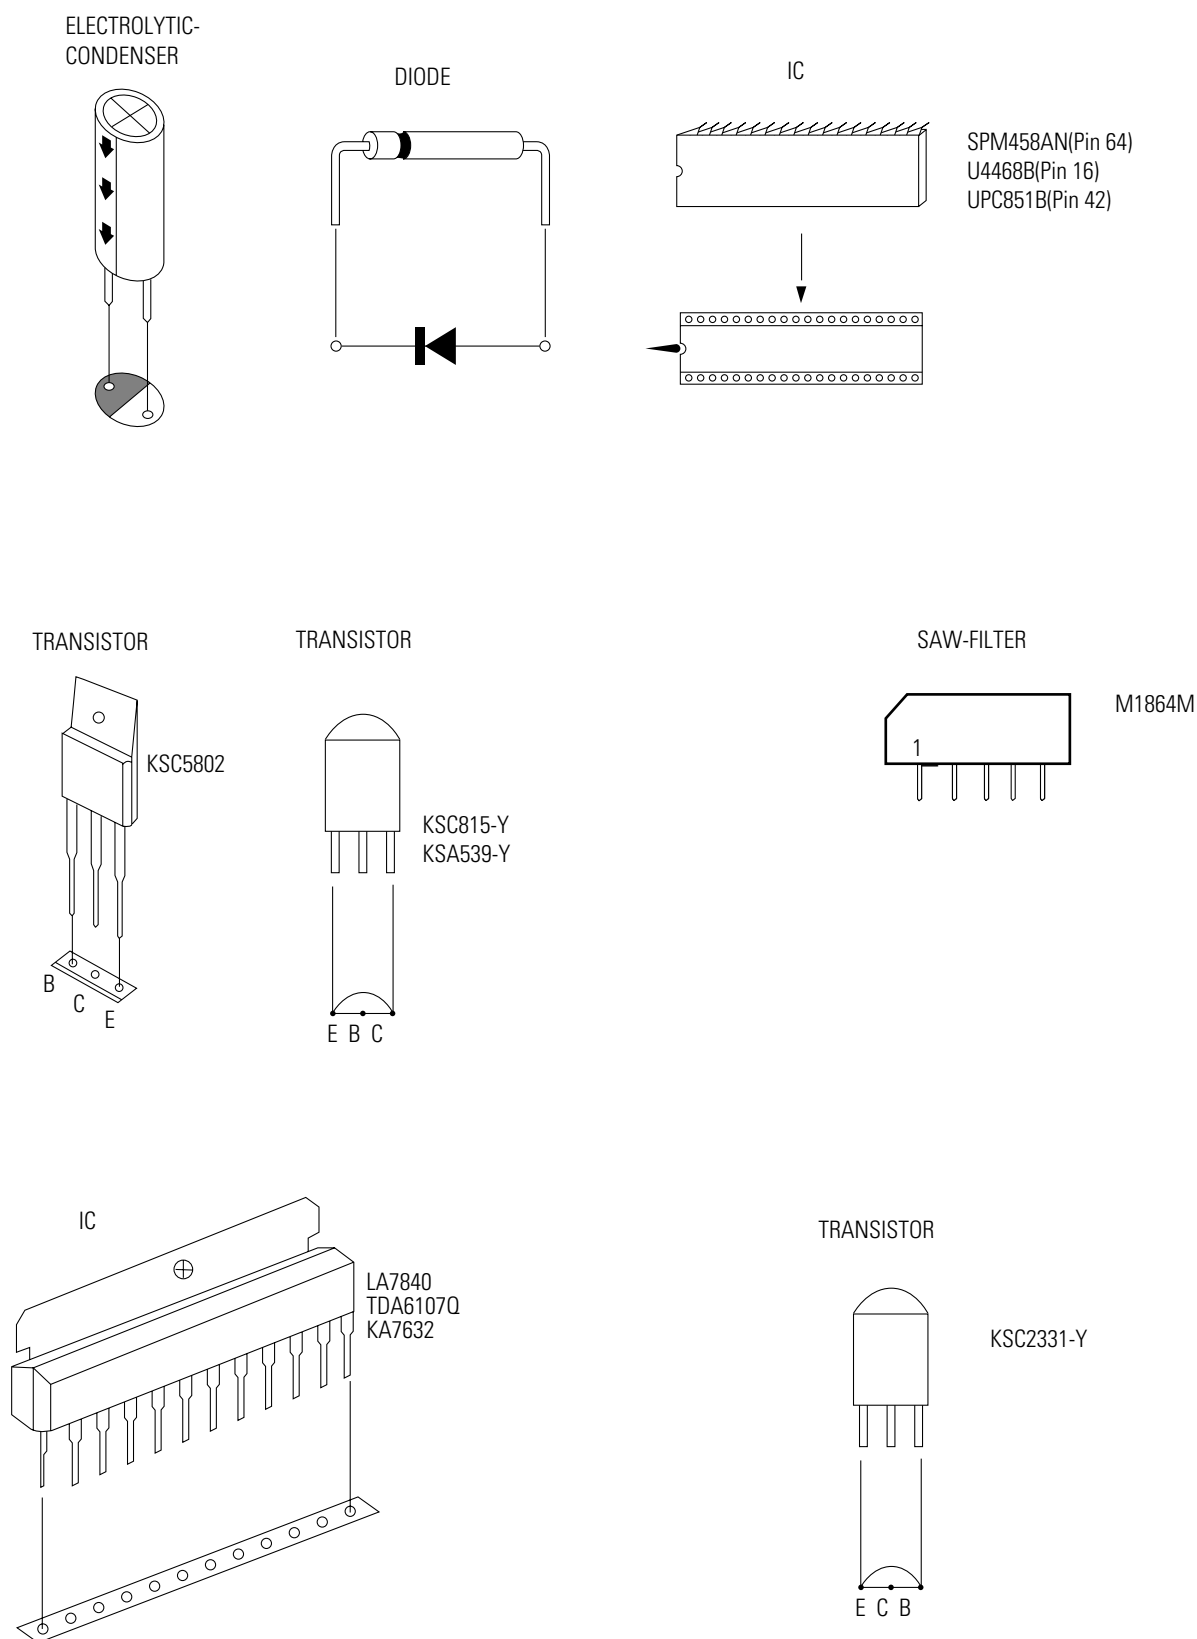


Fig. 2-1 Semiconductor Base Diagrams

MEMO



3. Disassembly and Reassembly

3-1 Back Cover Removal

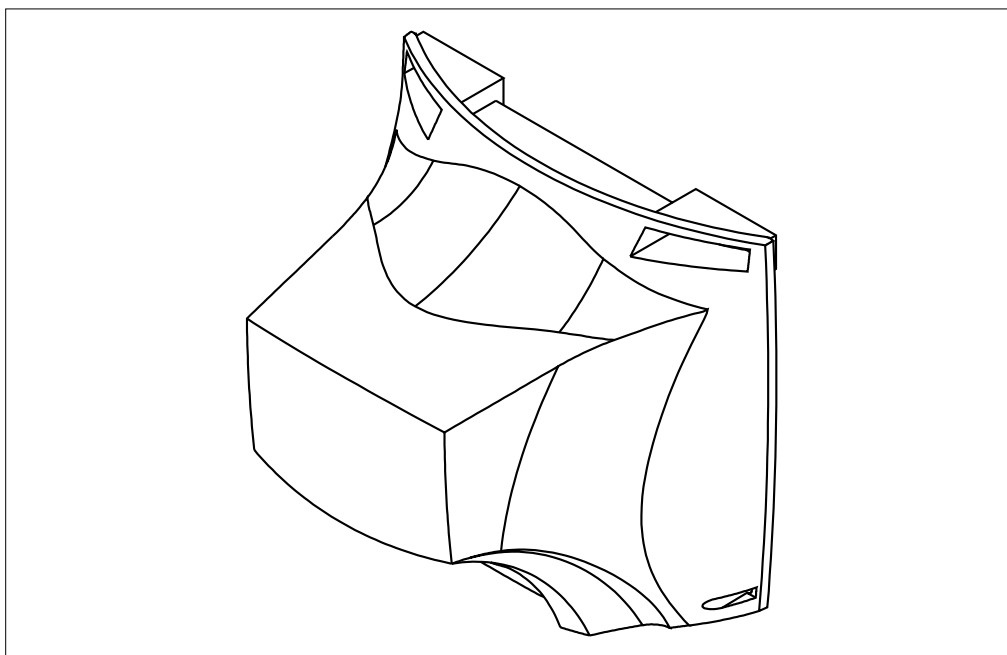

1. After removing the screws, press the tension rib and pull the cabinet backwards.
2. To reassemble, press the tension rib (see diagram).


3-2 Main Board Removal

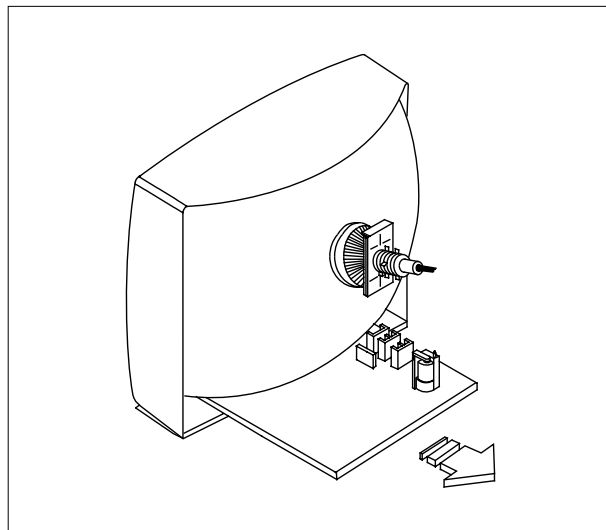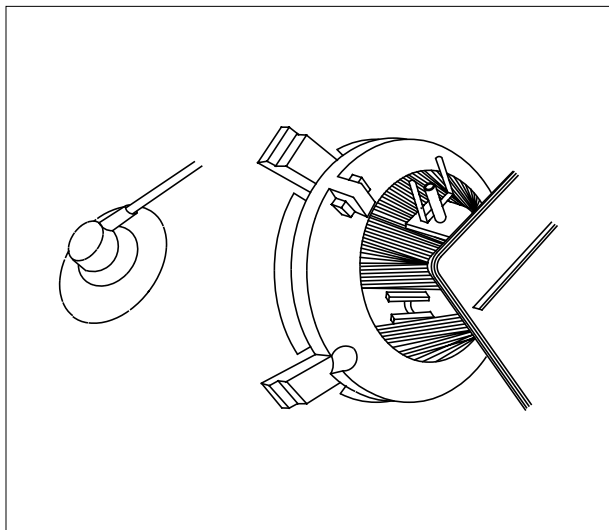

1. Separate the socket board from the CRT neck.
2. Remove the Anode Cap from the CRT.
3. Remove the main board by pulling it with both hands.


Warning: The FBT is charged with high voltage.
Before removing the Anode Cap, discharge the voltage
through one of the heat sinks on the main board.

3-3 Speaker Removal

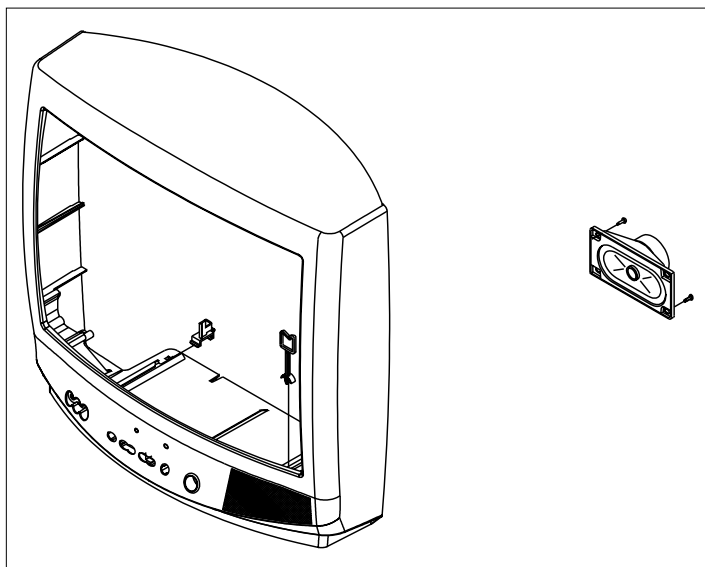

1. Remove the speaker by pressing the tension rib.

3-4 CRT Removal

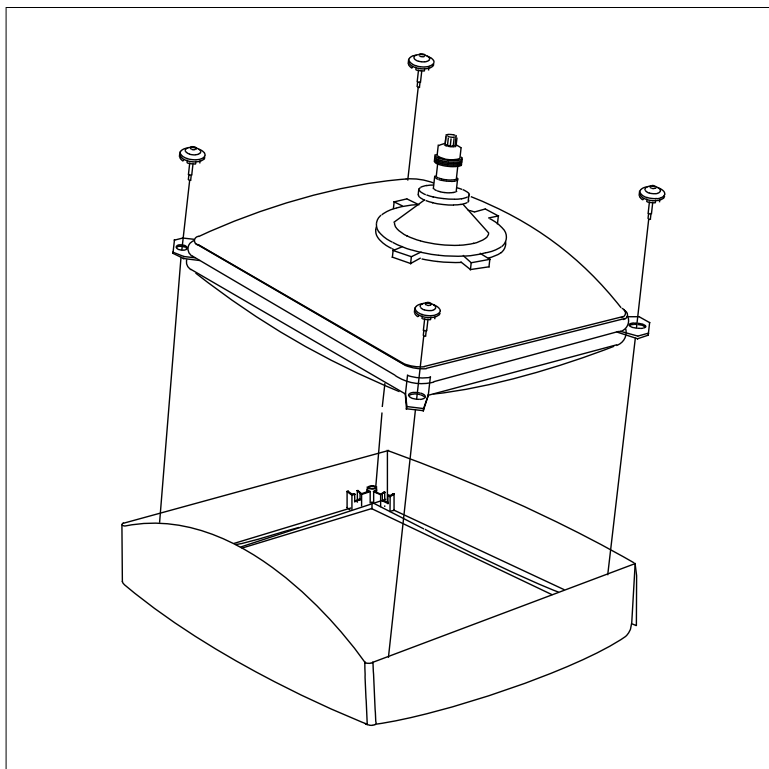

1. Spread a soft mat on the floor. Place the TV set face down.
2. Remove the 4 nuts mounting the CRT to the front cabinet. Lift the CRT.
3. Caution: Because of the high vacuum and large surface area of the picture tube, be careful while handling it: (1) Always lift the picture tube by grasping it firmly around the faceplate, (2) Never lift the tube by its neck. (3) Do not scratch the picture tube or apply excessive pressure. Fractures of the glass may cause an implosion.

MEMO

4. Alignment and Adjustments

4-1 Preadjustment

4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

4-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC902 is replaced, warm up the TV for 10 seconds.

4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :

White Balance
Sub-Brightness
Vertical Center
Vertical Size
Horizontal Size
Fail Safe (This adjustment must be the last step).

2. If the EEPROM or CRT is replaced and set SC as 20(factory mode).

4-2 Factory/Service Mode

4-2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated by entering the following remote-control sequence :
 - (1) DISPLAY → FACTORY.
 - (2) STAND-BY → MUTE → 1 → 8 → 2 → POWER ON.
2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: ADJUST, OPTION , G2-ADJUST and RESET.
3. Access the Adjustment Mode by pressing the "VOLUME" keys (Up or Down). The adjustment parameters are listed in the accompanying table, and selected by pressing the CHANNEL keys (▲, ▼).
4. Selection sequences for the all system:
DOWN or UP key:
SCT>SBT>BLR>BLB>RG>GG>BG>VSL>VS>VA>HS>SC>CDL>STT>AKB>FS>NDL>LBS>NSR>SCBT>VOL>CAP>HBS>RP00>RP01>FMWS>AGC1>OMD>SCL>PWL>MUS>AGC>DSK>DVDB
5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.
6. Cancel the Adjustment Mode by re-pressing the "FACTORY" or "Power OFF" keys.

4-2-2 Main Adjustment Parameter

NO	OSD	FUNCTION	RANGE	INITAL DATA	SETTING		REMARK
					19V	13V	
1	SCT	Sub Contrast	0 ~ 23	15	13	13	W/B (HIGH Y)
2	SBT	Sub Brightness	0 ~ 23	8	9	9	W/B A (LOW Y)
3	BLR	Black Level offset Red	0 ~ 63	35	31	31	W/B (LOW X, Y)
4	BLB	Black Level offset Blue	0 ~ 63	32	27	27	W/B (LOW X, Y)
5	RG	Red Gain	0 ~ 63	40	32	32	W/B (HIGH X, Y)
6	GG	Green Gain	0 ~ 63	30	25	25	FIX
7	BG	Blue Gain	0 ~ 63	42	31	31	W/B (HIGH X, Y)
8	VSL	Vertical Slope	0 ~ 63	30	31	31	Vertical SLOPE
9	VS	Vertical Shift	0 ~ 63	31	31	31	FIX
10	VA	Vertical Amplitude	0 ~ 63	20	40	20	Vertical SIZE
11	HS	Horizontal Shift	0 ~ 63	32	30	30	Horizontal SHIFT
12	SC	S-Correction	0 ~ 63	35	20	12	FIX
13	CDL	Cathode Drive Level	0 ~ 15	11	11	7	FIX
14	STT	Sub Tint	0 ~ 7	3	7	7	FIX
15	AKB	AKB On / off	0 ~ 1	0	0	0	FIX
16	FS	Filter Seting	0 ~ 15	32	37	37	FIX(STEREO)
17	NDL	NTSC Delay	0 ~ 15	1	1	1	FIX
18	LBS	Low Band Separation Set	0 ~ 63	32	32	32	FIX(STEREO)
19	NSR	NTSC Sub color	0 ~ 23	3	3	3	FIX
20	SCBT	Screen Brightness	0 ~ 63	35	45	45	FIX
21	VOL	Volume pre setting	0 ~ 63	10	10	10	FIX
22	CAP	Caption Position	0 ~ 15	12	12	12	FIX
23	HBS	High Band Separation Set	0 ~ 63	32	32	32	FIX(STEREO)
24	RP00	Ratio Pre / overshoot	0 ~ 1	1	1	1	FIX
25	RP01	Ratio Pre / overshoot	0 ~ 1	1	1	1	FIX
26	FMWS	Window Selection Sound PLL	0 ~ 1	0	0	0	FIX (Mono)
27	AGC1	IF AGC Speed	0 ~ 3	1	1	1	FIX (Nomal)
28	OMD	Offset IF Demodulator	0 ~ 63	32	32	32	FIX (No Crrrection)
29	SCL	Soft Clipping Level	0 ~ 3	3	1	1	FIX (Off)
30	PWL	Peak White Limitting	0 ~ 15	15	13	13	FIX (100%)
31	MUS	Matrix USA	0 ~ 1	0	0	0	FIX (Mono)
32	AGC	Automatic Gain Control	0 ~ 63	33	33	33	FIX
33	DSK	Dynamic Skin Tone	0 ~ 1	0	0	0	FIX
34	DVDB	DVD Bright Offset	0 ~ 10	5	4	4	FIX

4-2-3 Option Bytes

In the Service Mode, various can be selected via the Option Table. Example:

Option Table : xx xx

	OSD	SETTING	REMARK
1	VIDEO MUTE (When swiching channel)	ON	- 800msec Mute Time(Tri-norma)
		OFF	- Unavailable
2	AUDIO	STEREO	- Zenith stereo (WITH IN UPC1851B)
		LINE STEREO	- Line stereo (WITH IN UPC1851B)
		MONO	- Mono (WITH OUT UPC1851B)
3	TURBO	ON	- Stereo/L STEREO Model
		OFF	- Mono Model
4	ZOOM	ZOOM	- Nornal / Zoom
		NOMAL	- Nomal
5	AUTO POWER ON	ON	- The power is switched on automatically when detaching the Master S/W Auto On
		OFF	- Tact S/W Model
6	SOUND MUTE (NO SIGNAL)	OFF	- Unavailable
		ON	- Available
7	LANGUAGE	ENGLISH	- Start Language Select
		ESPANOL	
		FRENCH/PORTU	
8	HOTEL MODE	OFF	- Unavailable
		ON	- Available
9	CATV	AIR/STD/HRC/IRC	
		AIR/STD/HRC/AFN	- U.S Army
10	X-RAY	ON	- Available (U.S.A, Army)
		OFF	- Unavailable (South America)
11	V-CHIP	ON	- Available (U.S.A)
		OFF	- Unavailable (Canada)
12	AV Option	TV ↔ AV	
		TV ↔ AV ↔ DVD	
13	DEMO	ON	- Available (South America)
		OFF	- Unavailable (U.S.A)

4-3 Other Adjustments

4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +122.5 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 30KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 30KV under any conditions.

4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

4-3-5 Cathode Voltage Adjustment (Screen Adjustment)

1. Connect CRT socket pin GK to an oscilloscope probe.
2. Input a gray scale pattern. (Use a pattern generator, PM5518)
3. Use the P mode key (on the remote control) for the STANDARD picture.
4. Adjust the Screen VR (on the FBT) so that the voltage on the oscilloscope becomes $125 \pm 2.5V$ (See Fig. 4-1).

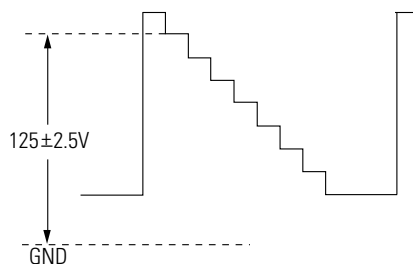


Fig. 4-1

4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-2.
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-3).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

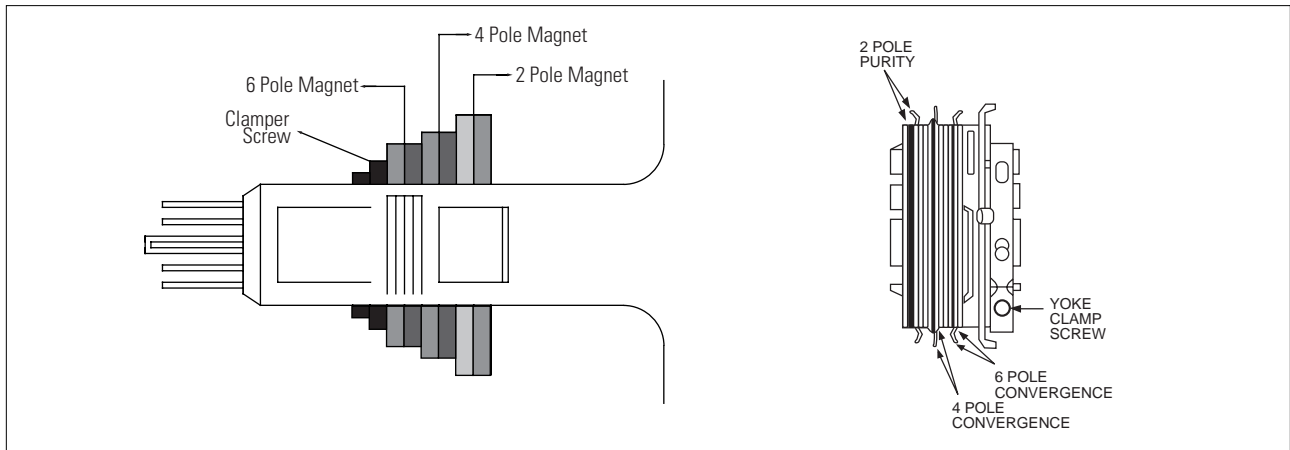


Fig. 4-2 Convergence Magnet Assembly

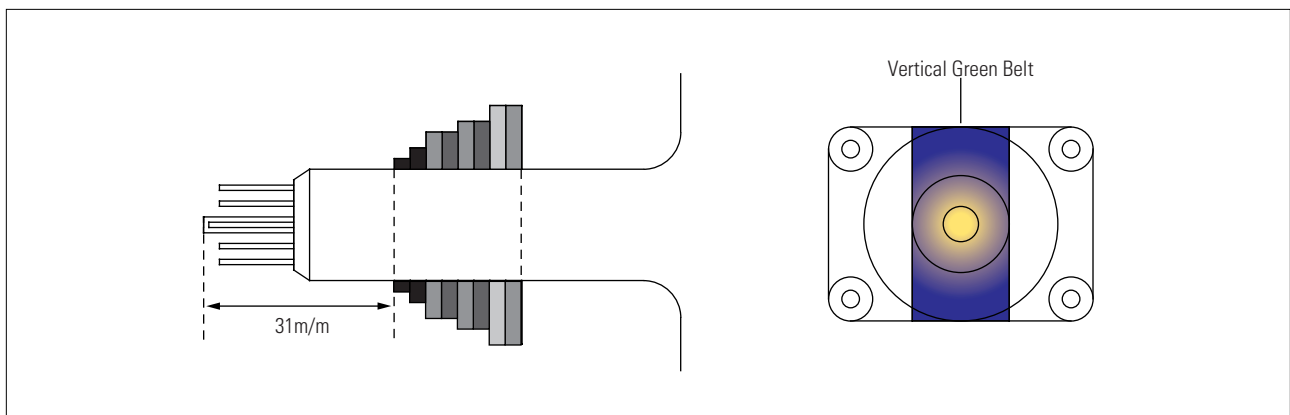


Fig. 4-3 Center Convergence Adjustment

4-3-7 White Balance Adjustment

(a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

DISPLAY → FACTORY → FACTORY

2. Input a Toshiba pattern.

(b) Low-Light Adjustment

1. Set SBT to 1.2 fL in the Factory Service Mode with using CA100. See Fig. 4-4.
2. Adjust RG,BG so that the levels are suitable to each local area.

(c) High-Light Adjustment

1. Set SCT to 50FL(13V : 60FL) in the Factory Service Mode with using CA100. See Fig. 4-4 .

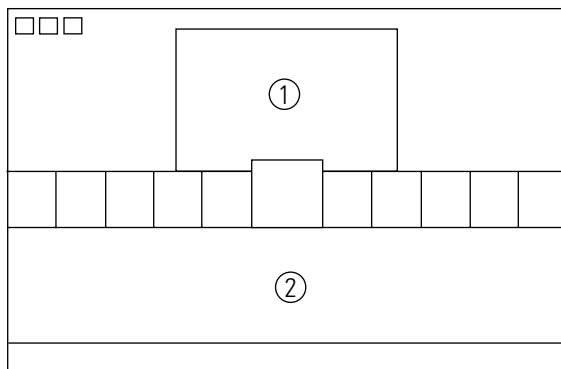


Fig. 4-4

4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-5).



Fig. 4-5 Center Convergence Adjustment

4-3-9 RF AGC Adjustment

Set the AGC data to 33 (Factory Mode).

4-3-10 Sub-Color Adjustment

Set NSR data to 3 (Factory Mode).

4-3-11 Geometry Adjustment

SC → VS → VA → VSL → HS

1. Input a lion head pattern.
2. Set the SC (S-Correction) as 20(13V : 12) and VS (Vertical Shift) 31 so that the lion head circle becomes oval.
3. Adjust with VA (Vertical Amplitude) so that the top margin of the picture is 4.




Fig. 4-7

4. Adjust with VSL (Vertical-Slope) so that the bottom margin of the picture is 4.




Fig. 4-8

5. Adjust with HS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.





Fig. 4-9


6. Adjust HS (Horizontal Shift) so that the left and right margins of the picture are 5.

5. Troubleshooting


5-1 No Power

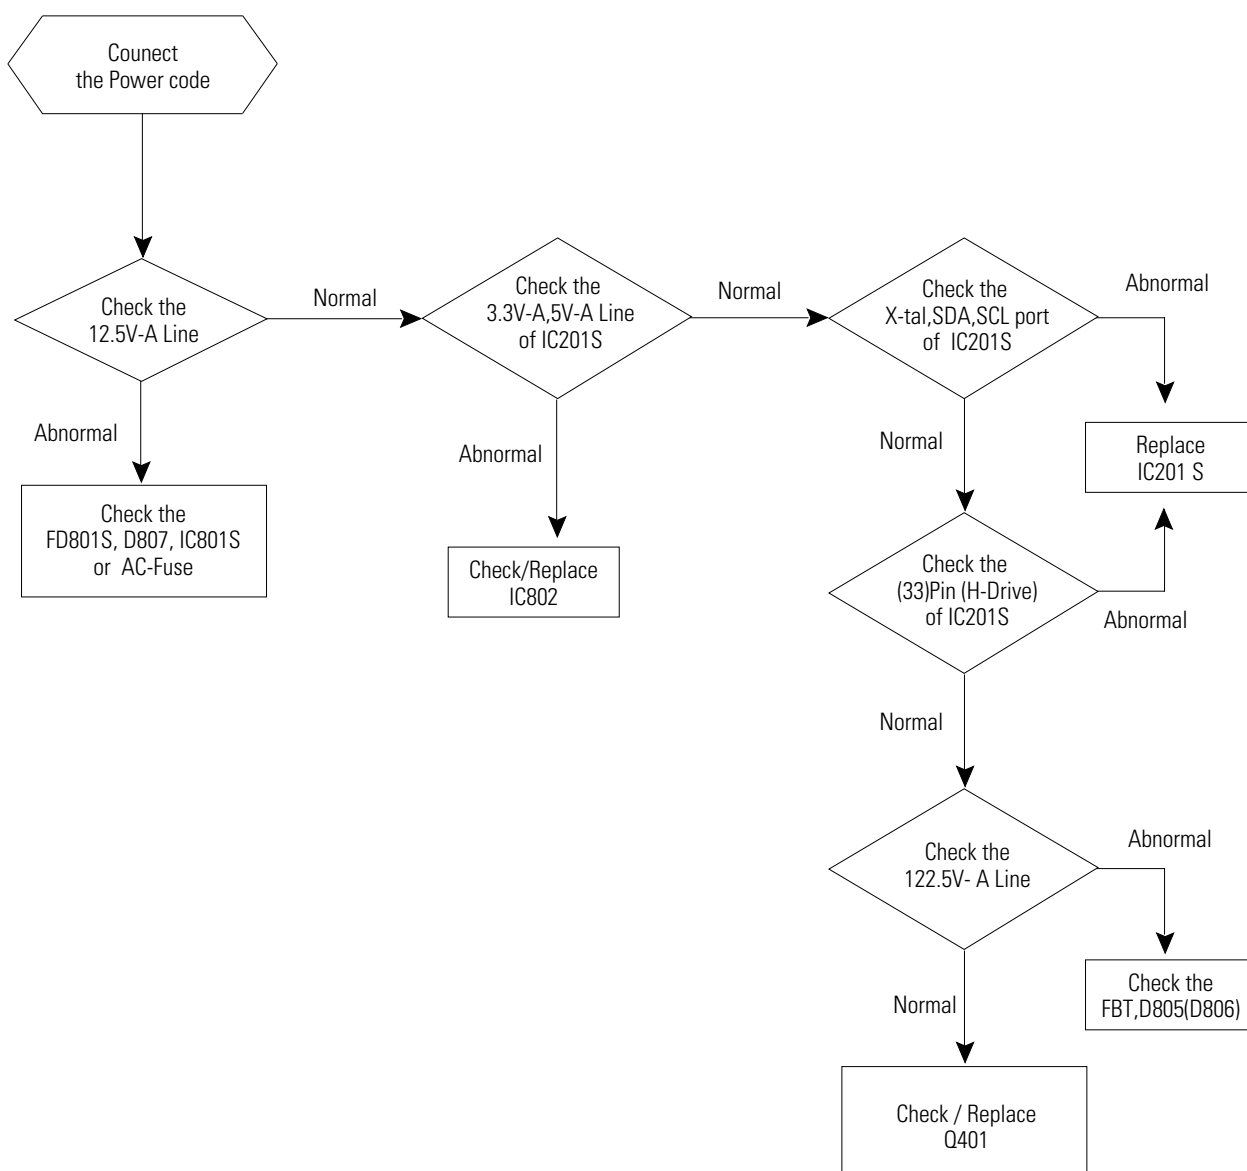


5-2 No Video (Sound OK)

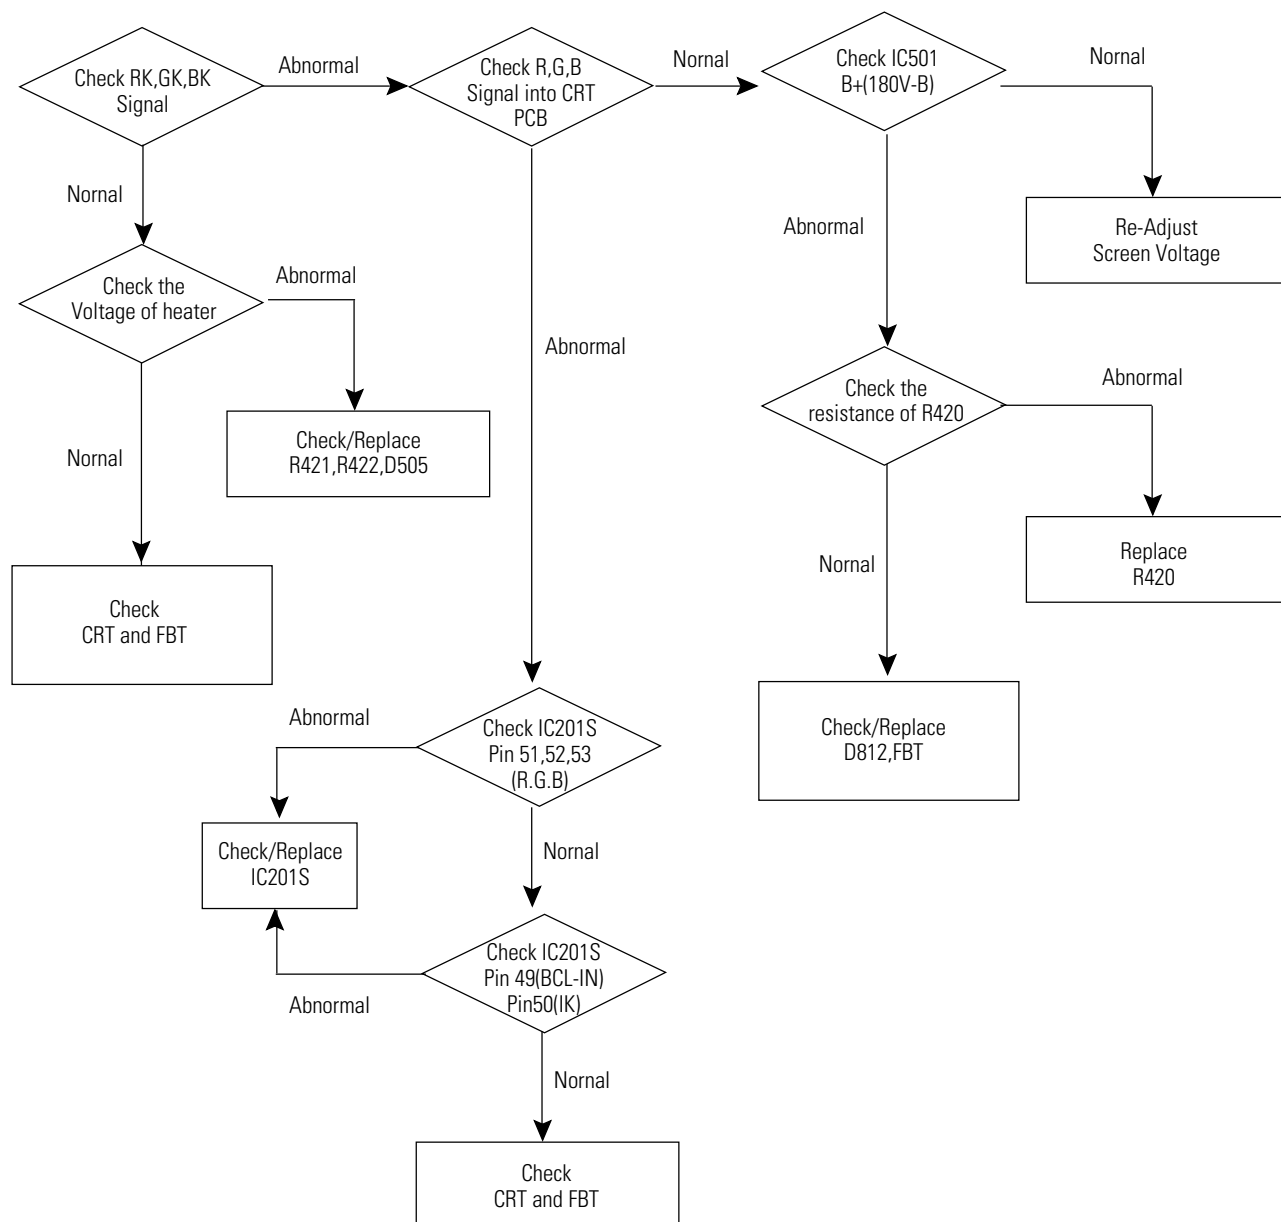

5-3 No Sound (Video OK)

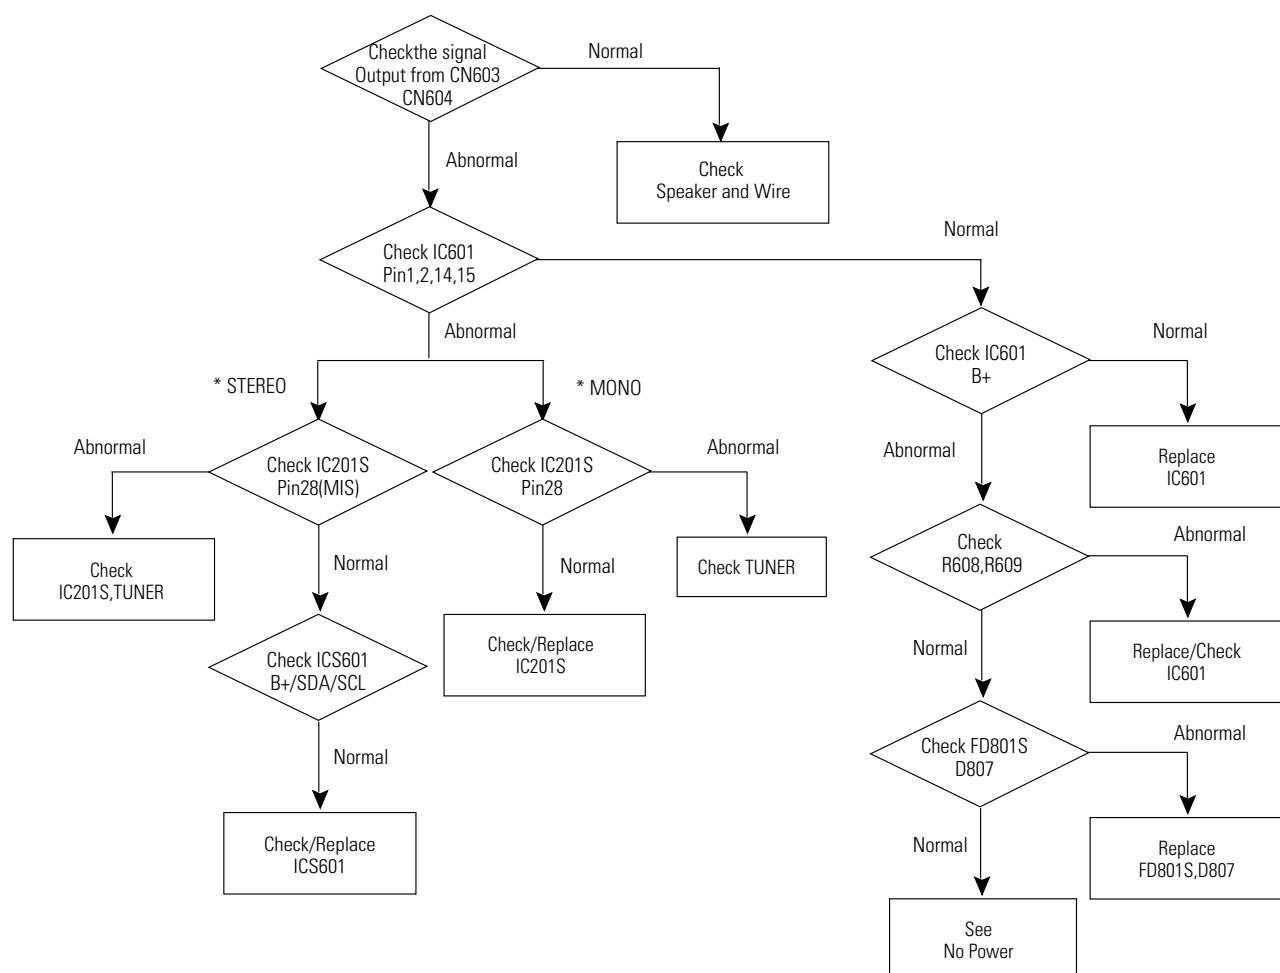


5-4 Vertical Lines Appear or Screen

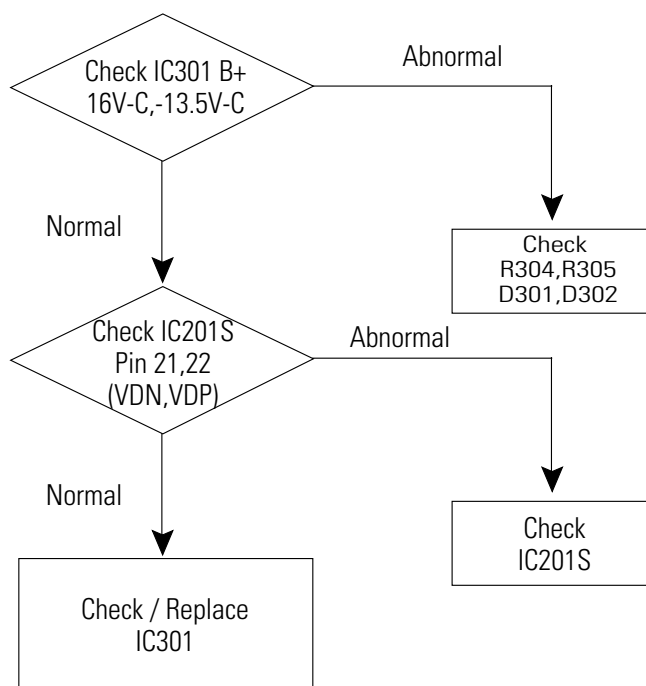

6. Exploded View & Parts List

6-1 MR20300FX/TCE


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

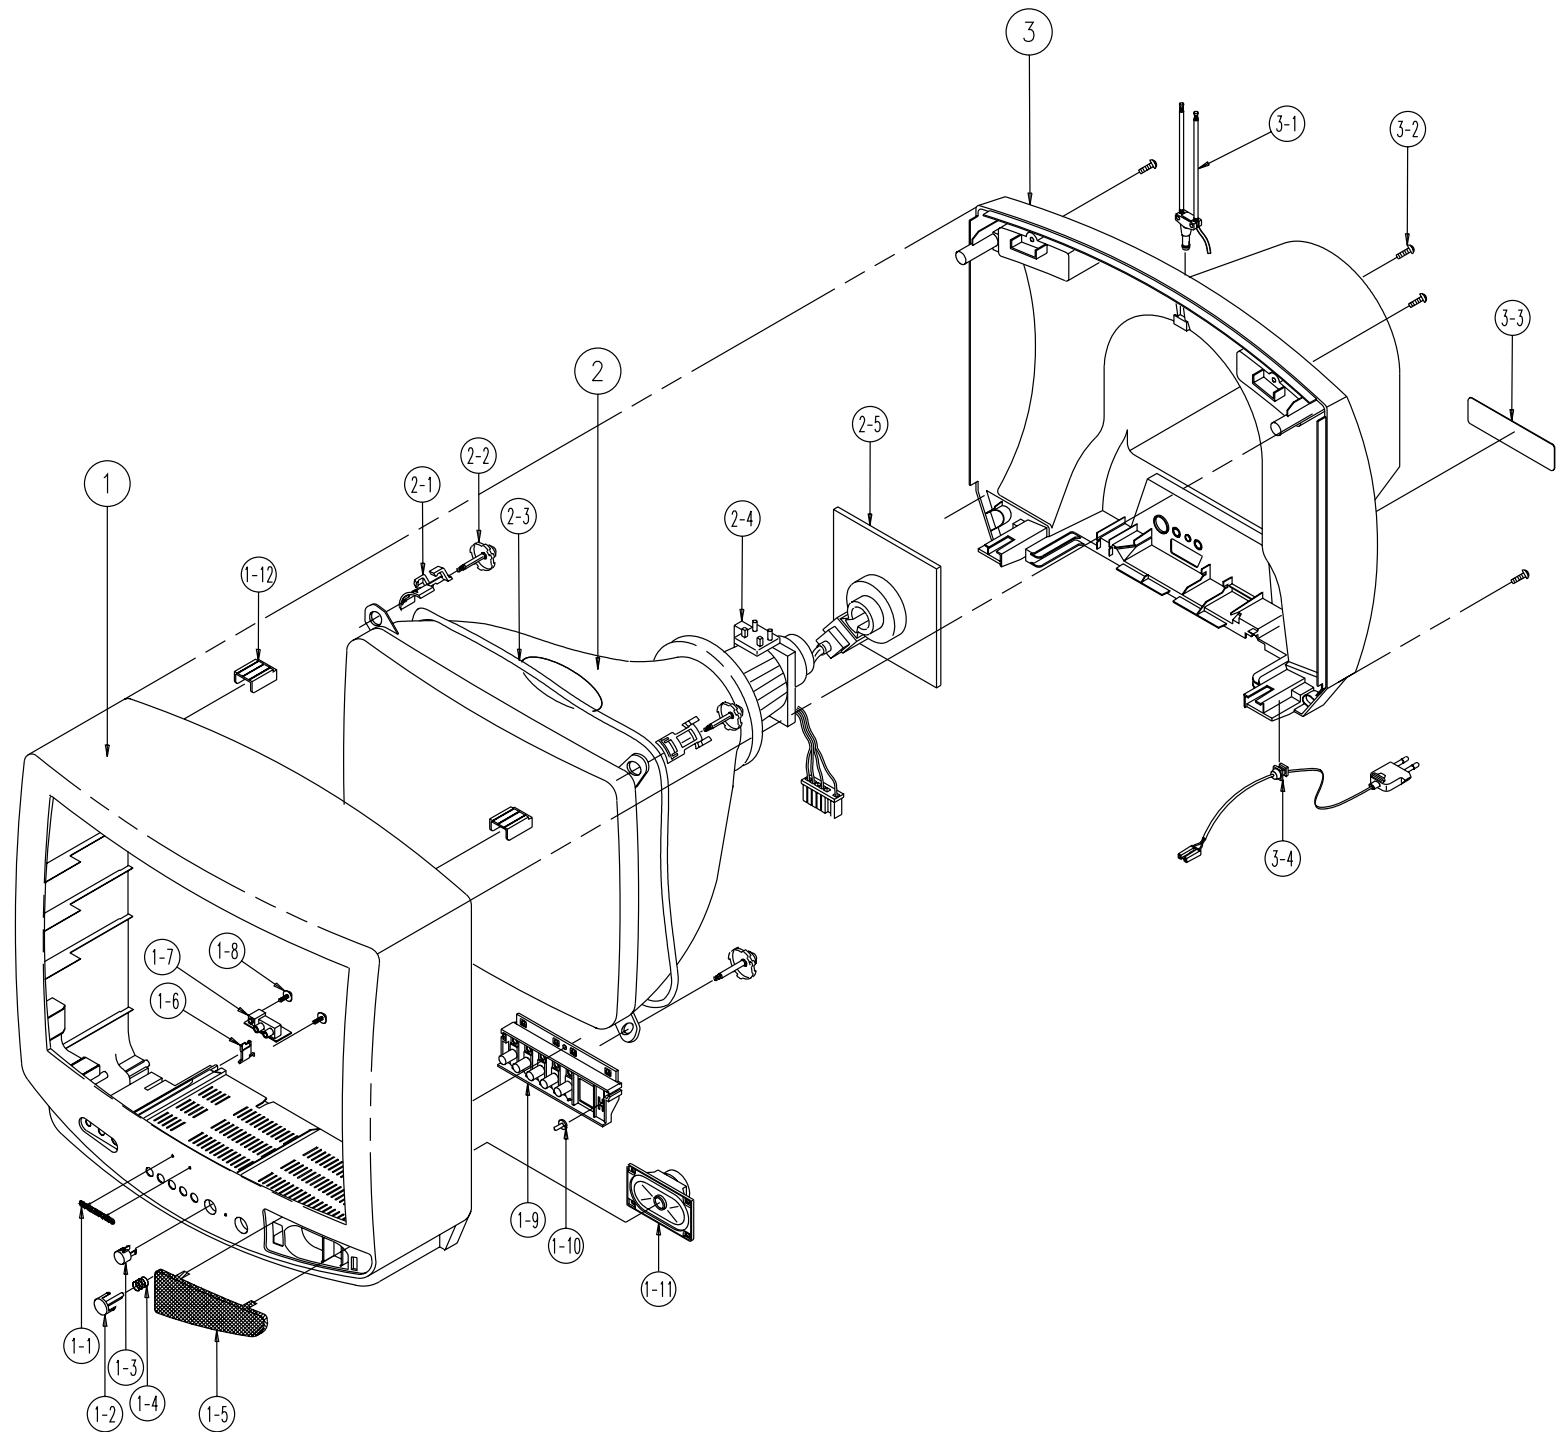

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-00233J	CABINET FRONT;5073,SV809P EPN,HIPS,HB,G4	1	F/C
1-1	AA64-70120A	BADGE-BRAND;ALL RCA L30 7.5	1	BADGE
1-2	AA64-10131F	KNOB POWER;5073,ABS,-,GRAY,NO-SILK,HB,-,	1	KP
1-3	AA64-40044A	WINDOW-REMOCON;-ABS,HB,-,NO-S	1	WR
1-4	AA61-60003T	SPRING-CS;-,-SUS304,0.5,OD7,H	1	SPRING
1-5	AA63-50096D	GRILLE WOOFER;DP,5073,63-50095E	1	GRILL
1-6	AA61-40007A	STOPPER-PCB;-ABSHB,-,-,NTR,50	1	STOPER
1-7		ASS'Y-A/V FRONT	1	
1-8	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	2	PAV+CF
1-9	AA64-10039C	KNOB-CONTROL;-5073,-ABS,HB,GRAY	1	KC
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-11	3001-001020	SPEAKER;3W,8ohm,90dB,140Hz	1	SPK
1-12	AA61-40010A	BOSS-CABINET;-HIPS,HB,BLK,	2	BOSS
2	AA03-00087A	CRT-COLOR;-A48KRD82X(DH),+380MG,20INCH,	1	CRT
2-1	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	2	HDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	AA27-00254A	COIL DEGAUSSING;;20INCH,10%,70TS,4.5OHM,	1	D-COIL
2-4	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M	1	C-Y
2-5	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-30775G	CABINET-BACK;HIPS,HB,G4309,5073	1	B/C
3-1	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN	1	A/ROD
3-2	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-3	AA64-02055A	INLAY BACK;CAUTION,BLK,LGRY-TXT,23X93,W/	1	INLAB
3-4	AA96-00667A	ASSY POWER CORD;;EP2N/P,H/C250,AA61-2004	1	PWR/AC

6-2 CT1488BLFX/XAP


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

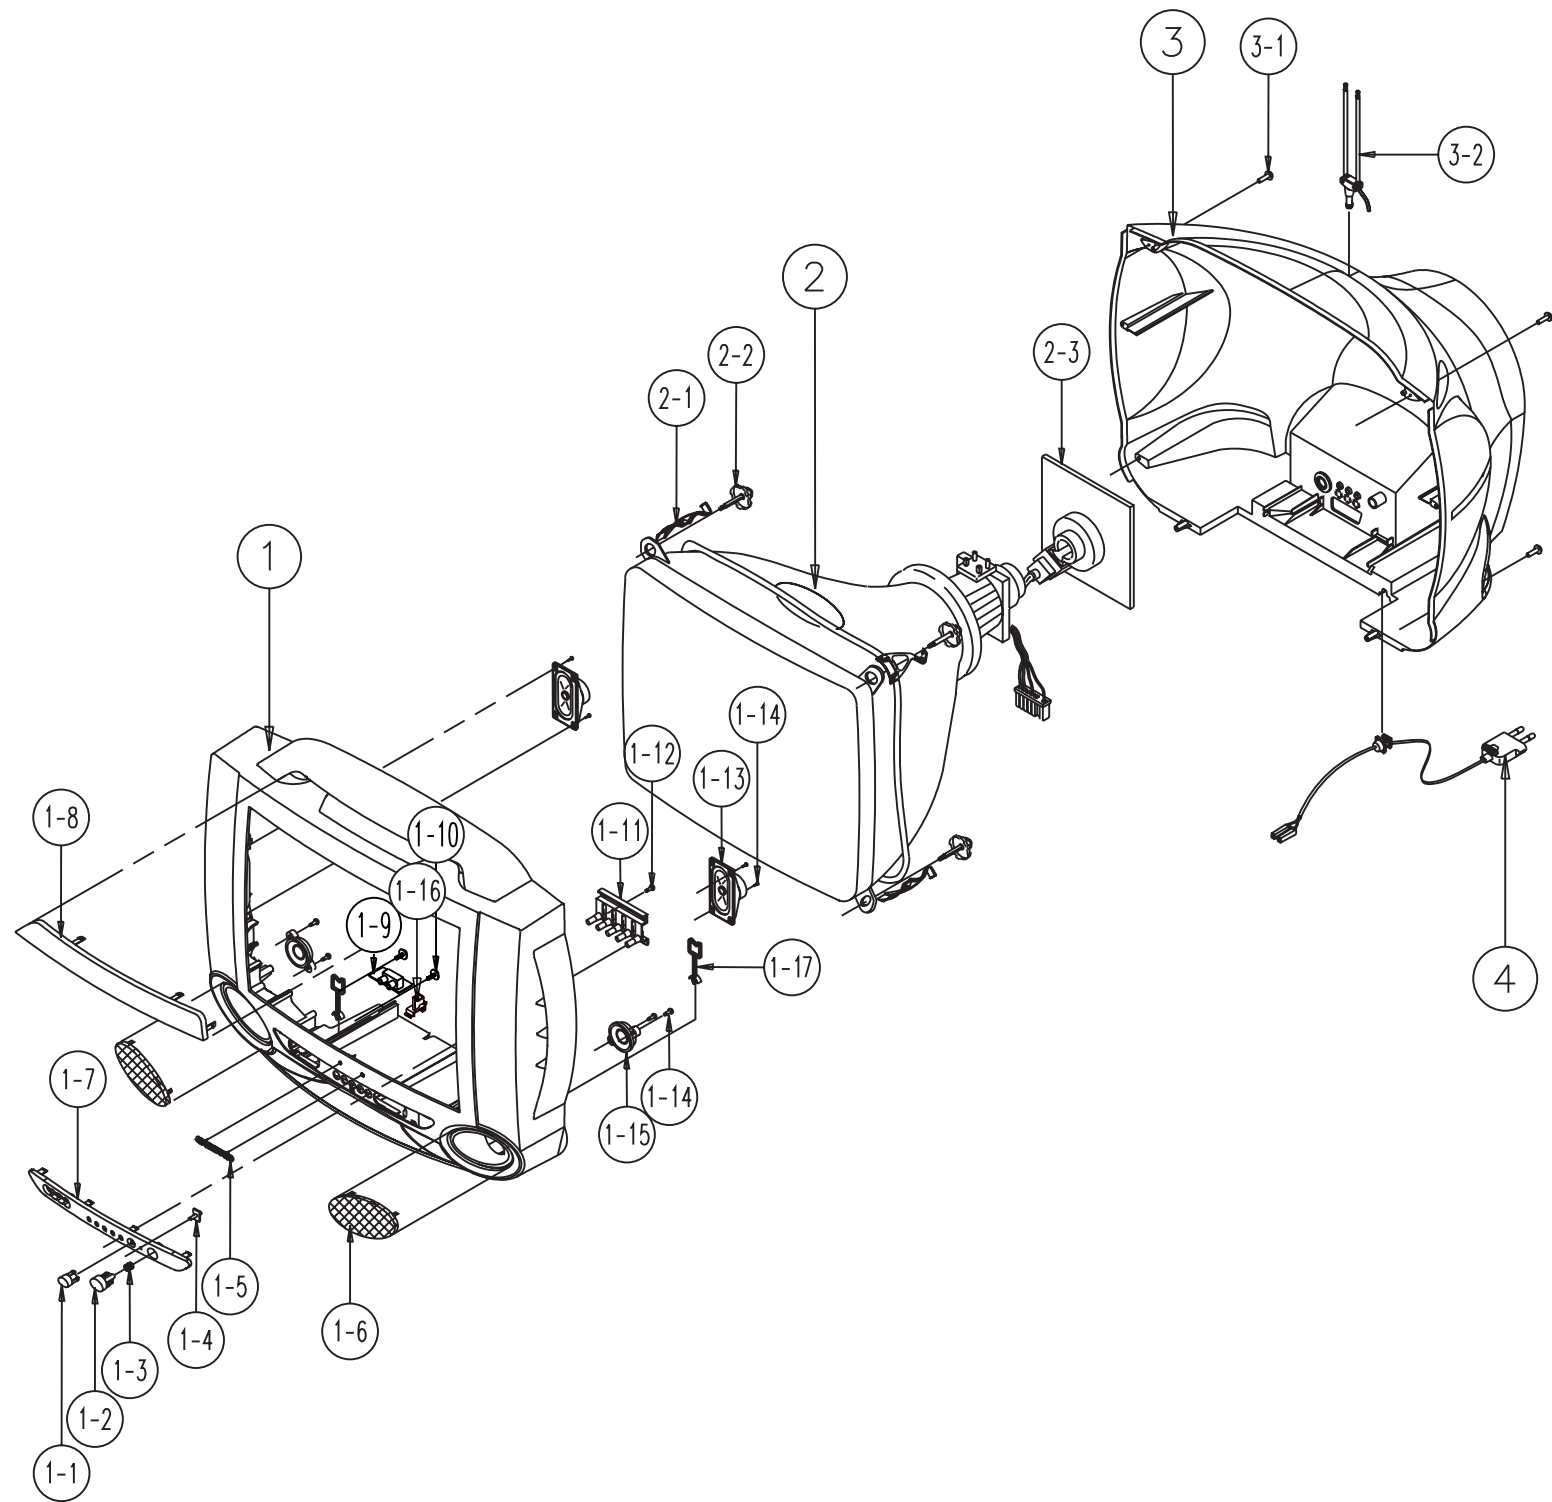

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-00750B	CABINET FRONT;-;14S4,SV704P EPG BIO2000,	1	F/C
1-1	AA64-00754B	WINDOW REMOCON;-;14S4,-;PC,V0,VIOLET,-	1	WR
1-2	AA64-00753B	KNOB POWER;-;14S4,NT NO-SILK,ABS,HB,G367	1	KP
1-3	AA61-60003J	SPRING-CS;-;-SUS304,0.5,OD6,H	1	SPRING
1-4	AA64-00755B	INDICATOR LED;-;14S4,-;ACRYL,-;CLR,-	1	IL
1-5	AA64-70127F	BADGE-BRAND;AL,SS,SILVER,R800	1	BADGE
1-6	AA63-00277A	GRILLE-WOOFER,L;DP,14S4,63-00218B 6.5kg,	1	GRILLE
	AA63-00278A	GRILLE-WOOFER,R;DP,14S4,63-00219B 6.5kg,	1	GRILLE
1-7	AA63-00215B	COVER-CONTROL,A;-;14S4,GD906P EPG NT,HIP	1	CC
1-8	AA63-00227B	COVER-TOP,LATIN;-;14S4,DG703P,ABS,LG TR5	1	C/TOP
1-9	AA95-00591A	ASSY-PCB,A/V FRONT;-;CT1488BL6,K15A,-;-;	1	A/A-V
1-10	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+;M4,L12,ZPC(YEL)	2	PA+CF
1-11	AA64-00752B	KNOB CONTROL;-;14S4,-;ABS,HB,G3676	1	KC
1-12	6003-001026	SCREW-TAPTITE,RH,+;B,M4,L15,ZPC(BLK),SWR	1	KF+CF
1-13	3001-001034	SPEAKER;6W,80HM,90DB,140HZ	2	SPK
1-14	6003-001026	SCREW-TAPTITE,RH,+;B,M4,L15,ZPC(BLK),SWR	12	SPK+CF
1-15	AA96-00321A	ASSY SPEAKER;-;8ohm,6W,001034/00320A,350	1	A/SPK
1-16	AA61-40113A	STOPPER-PCB;-;ABS,HB,NTR.	1	STOPPE
1-17	AA65-30018A	CLAMP-WIRE;-;NYLON6.6;-;-;DATL	1	CWIRE1
2	AA03-10002M	CRT-COLOR;-;A34KQV42X,0MG,14,	1	CRT
2-1	AA61-00735A	HOLDER;20POLYVINIL,DEGAUSSING,CHLORI	2	CDCOIL
2-2	AA60-10050Q	SCREW-ASSY;WC,HH,M5,L26.5,SWRCH,	4	CRT+CF
2-3	3704-001089	SOCKET CRT;9P,22.5PI,12PI,SN,13	1	V999S
3	AA64-00751E	CABINET BACK;14S4,HIPS,HB,G4309	1	B/C
3-1	6003-001026	SCREW-TAPTITE,RH,+;B,M4,L15,ZPC(BLK),SWR	6	CB+CF
3-2	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN	1	A/ROD
4	AA96-00570A	ASSY POWER CORD;-;CP2/NO,H/C200,KKP419C,	1	PWR/AC

6-3 CT1991FX/SMS


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

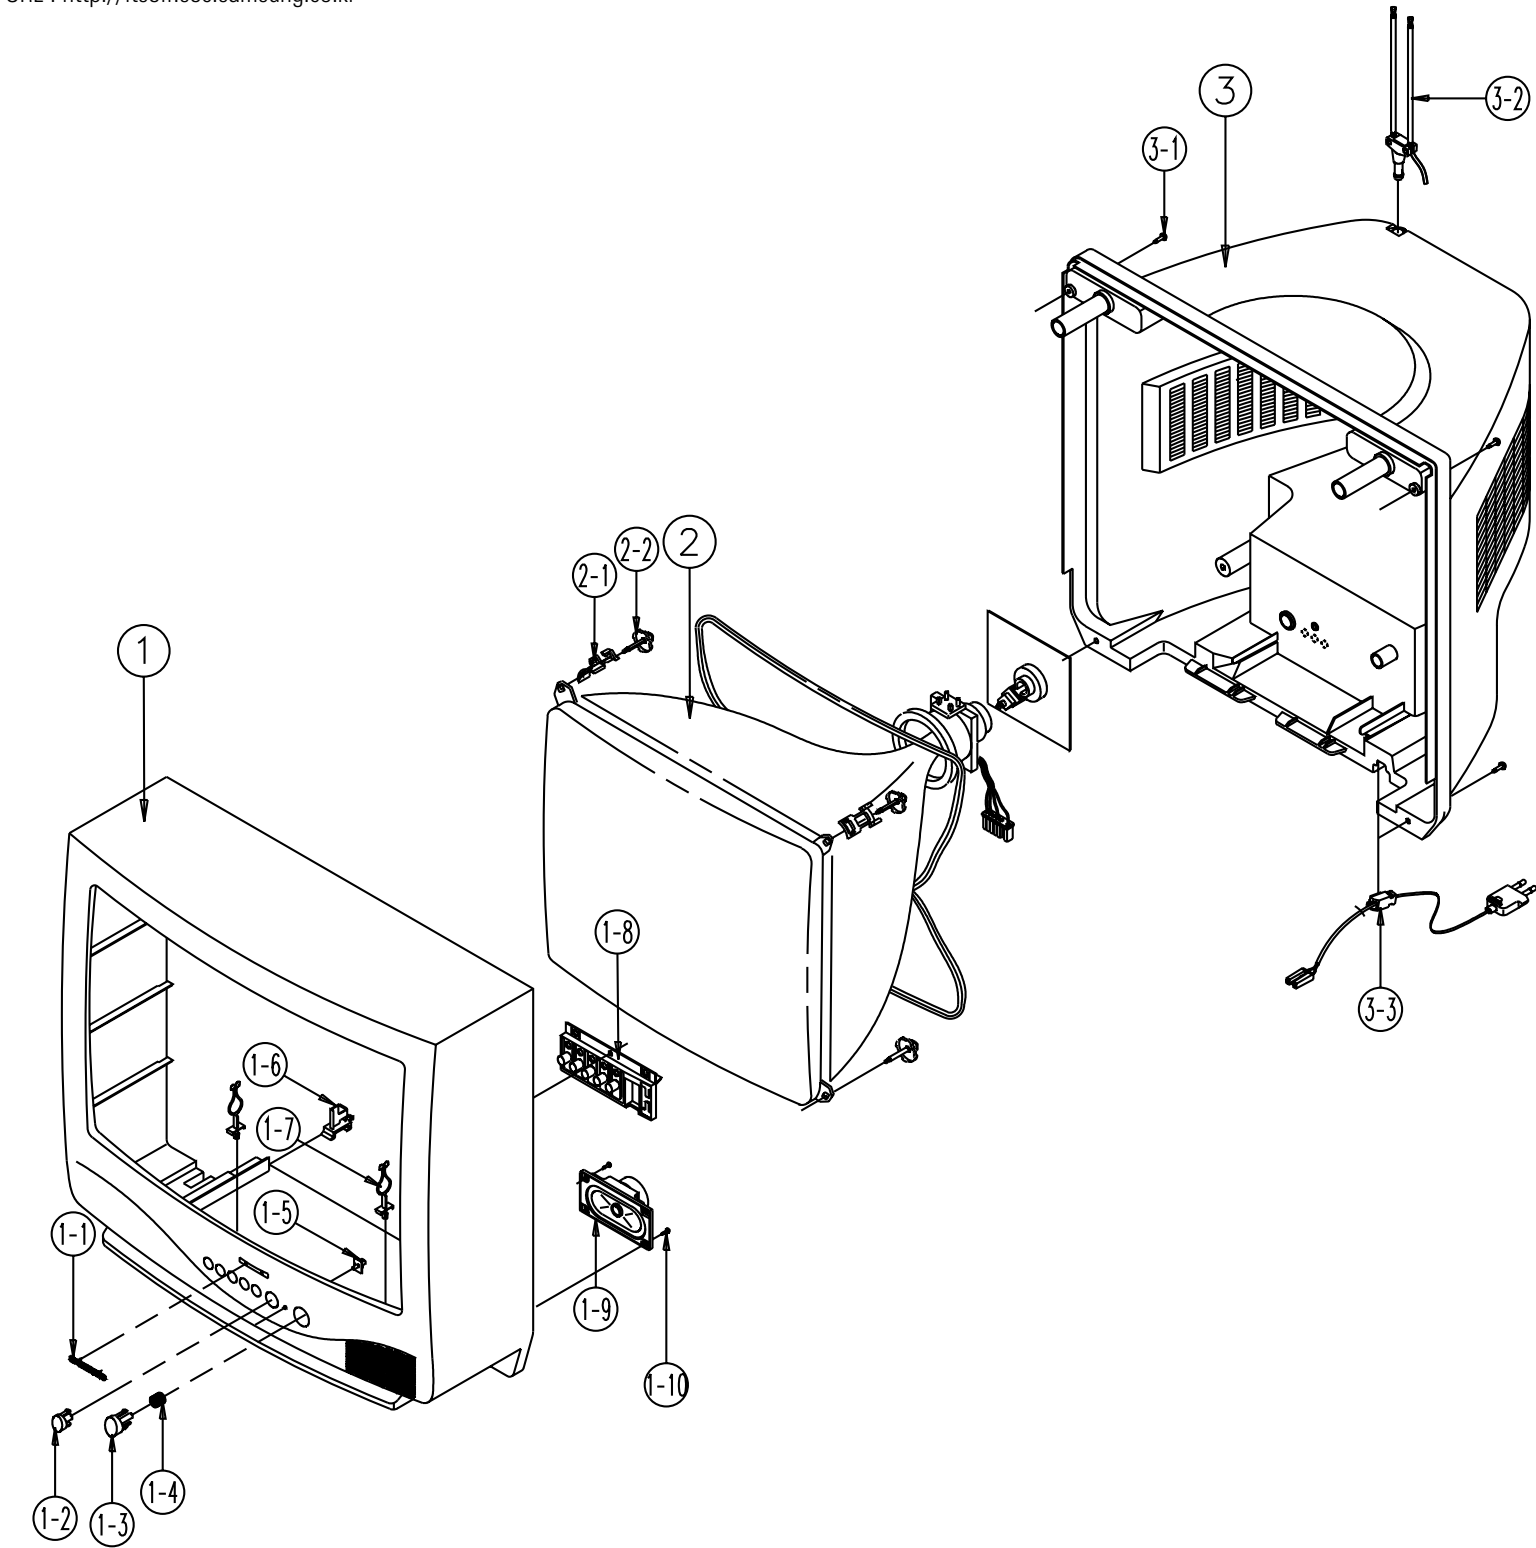

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-02879A	CABINET-FRONT;501F,HIPS,V0,SV808P,K15A	1	F/C
1-1	AA64-02287A	BADGE-BRAND;ALL,AL FORGING,-,-,L40,-,SIL	1	BADGE
1-2	AA64-40450B	WINDOW-REMOCON;- ,501F,-,PC,V0,VIOLET,-	1	WR
1-3	AA64-10704F	KNOB POWER;501F,ABS,-,G3676,-,HB,-,-	1	KP
1-4	AA61-60003Q	SPRING-CS;-,-,SUS304,0.5,OD8,H10,N5,-,-	1	SPRING
1-5	AA64-40451B	INDICATOR-LED;- ,33.501F,-,ACRYL,-,CLR,-	1	IL
1-6	AA61-40113A	STOPPER-PCB;- ,ABS,HB,NTR.	1	STOPPE
1-7	AA65-30105A	CLAMP-WIRE;NYLON 66N,V0,NTR,15MM	1	CWRE1
1-8	AA64-10705C	KNOB CONTROL;501F,ABS,-,-,-,HB,G3676,-,-	1	KC
1-9	6003-001026	SCREW-TAPTITE;RH,+ ,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-10	3001-001020	SPEAKER;3W,8ohm,90dB,140Hz	1	SPK
1-11	6003-001026	SCREW-TAPTITE;RH,+ ,B,M4,L15,ZPC(BLK),SWR	4	SPK+CF
2	AA03-00246A	CRT-COLOR;A48KRD82X(H)+380MG,NONAFTA,MAL	1	CRT
2-1	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR	4	CRT+CF
3	AA64-02878A	CABINET-BACK;501F,HIPS,V0,BLK,K15A,SAM'S	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+ ,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2		ANT ROD;VHF,4SDODIPOLE850MMBRN	1	
3-3	AA96-20129A	ASSY-POWER,CORD;- ,EP2/YES,H/C300,ME301P,	1	PWR/AC

6-4 CT2088BWX/GSU


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

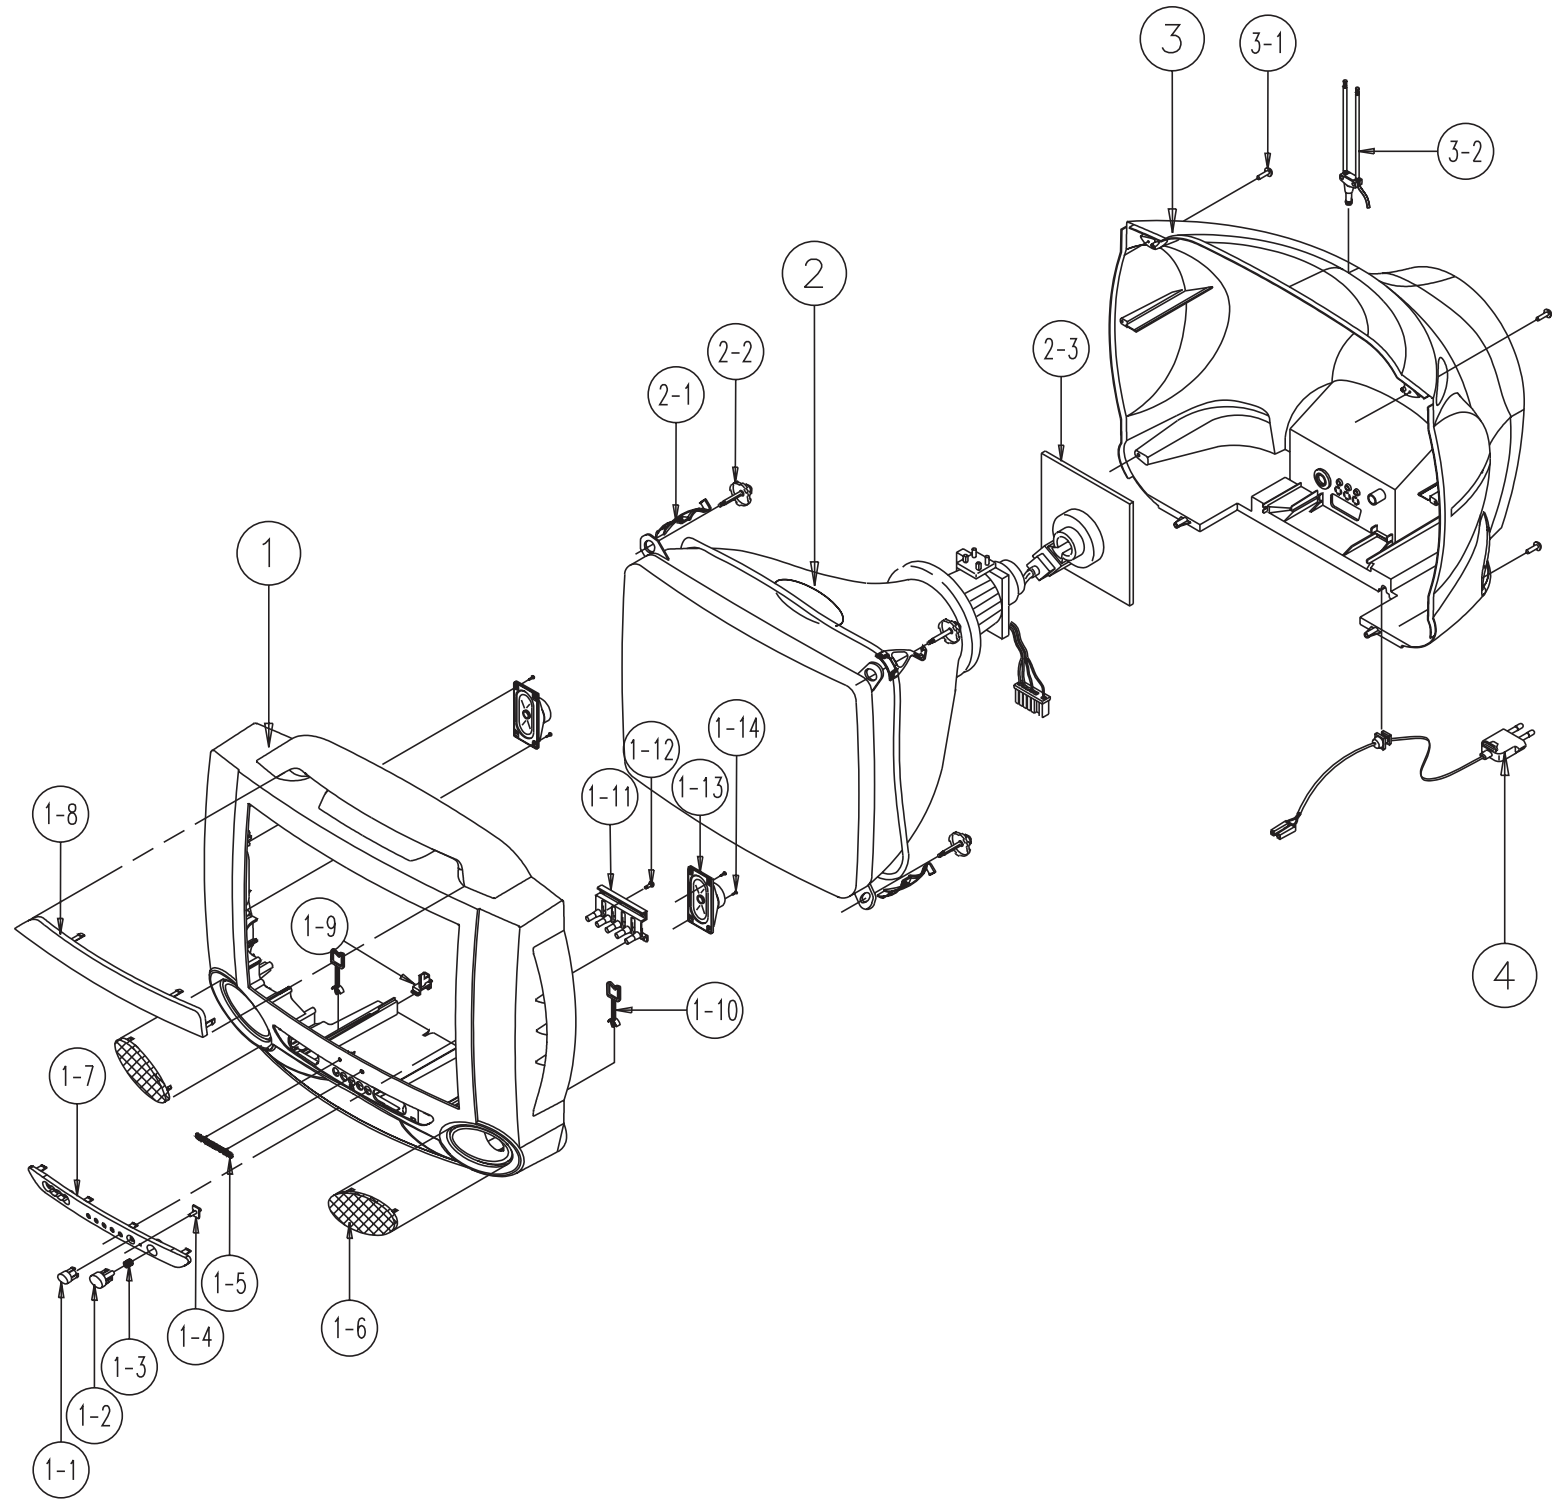

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-00700F	CABINET FRONT;20S4,SV704P B-VISION,HIPS,	1	C/F
1-1	AA64-00704B	WINDOW REMOCON;-;20S4,-;PC,V0,VIOLET,-	1	WR
1-2	AA64-00703D	KNOB POWER;-;20S4,T/S NO-SILK,ABS,HB,G36	1	KP
1-3	AA61-60003J	SPRING-CS;-;-SUS304,0.5,OD6,H	1	SPRING
1-4	AA64-00705B	INDICATOR LED;-;20S4,-;ACRYL,-;CLR,-	1	IL
1-5	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	1	BADGE
1-6	AA63-00270A	GRILLE-WOOFER,L;DP,20S4,63-00204B 11.5kg	1	GRILLE
	AA63-00271A	GRILLE-WOOFER,R;DP,20S4,63-00205B 11.5kg	1	GRILLE
1-7	AA63-00202C	COVER-CONTROL;-;20S4,GD906P EPG NT,HIPS,	1	CC
1-8	AA63-00226B	COVER-TOP,LATIN;-;20S4,T/SOUND,ABS,LG TR	1	C-TOP
1-9	AA96-01249A	ASSY PCB P-A/V FRONT;15/19/20,K15D	1	A-A/V
1-10	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	1	
1-11	AA64-00702B	KNOB CONTROL;-;20S4,-;ABS,HB,G3676	1	KC
1-12	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13	AA96-00287A	ASSY SPEAKER;-;8ohm,15W,001115/001088,AA	1	A/SPK
1-14	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC(BLK),SWR	12	SPK+CF
2	AA03-10029X	CRT-COLOR;A48KRD82X(H),0MG,SEMI-TINT.	1	CRT
2-1	AA61-00734A	HOLDER;25POLYVINY,DEGAUSSING,CHLORI	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-00701F	CABINET BACK;20S4,HIPS,HB,G4309	1	B/C
3-1	6003-001026	SCREW-TAPTITE,RH,+,B,M4,L15,ZPC(BLK),SWR	6	CB+CF
3-2	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN	1	A/ROD
4	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

6-5 CT2088BWX/STR


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

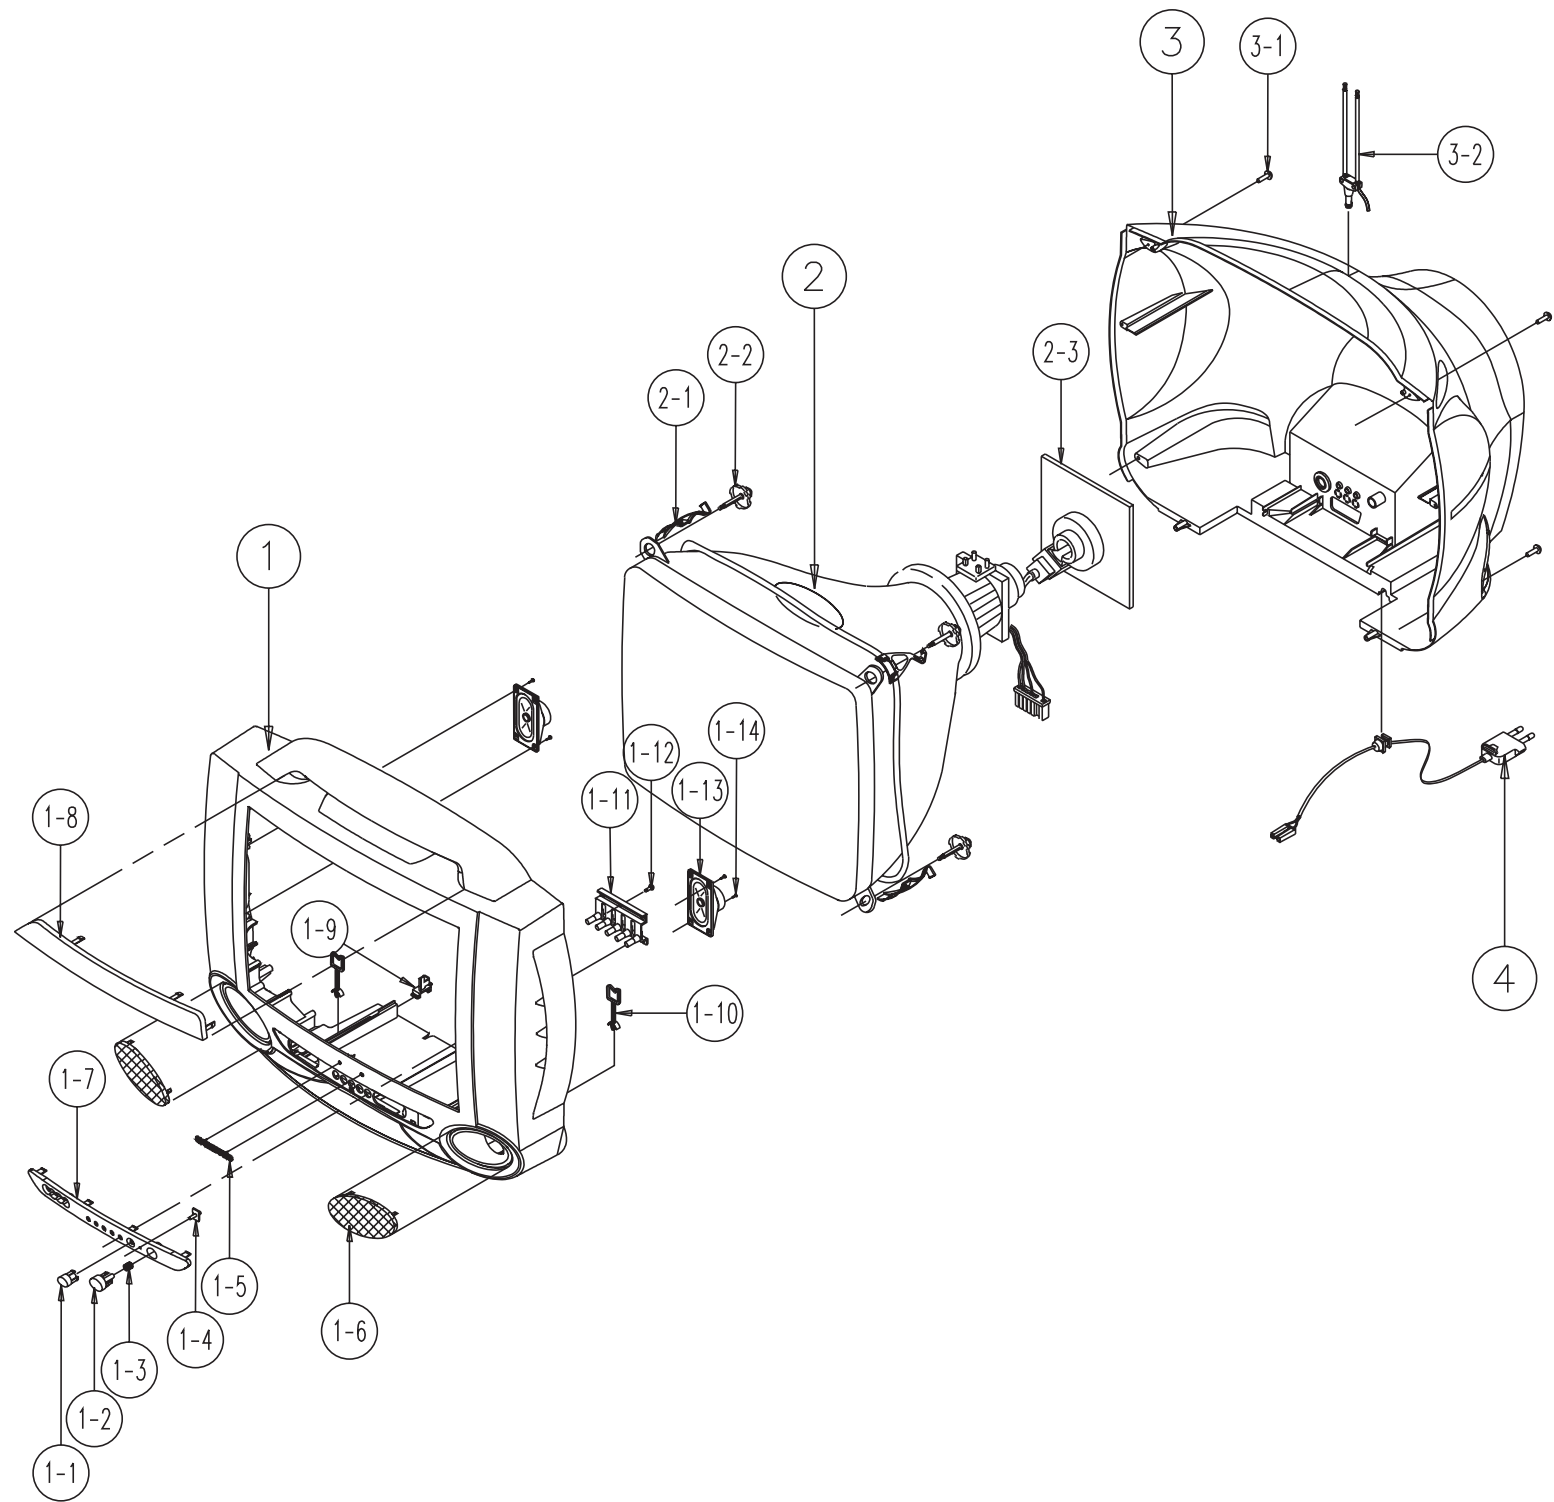

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-00700F	CABINET FRONT;20S4,SV704P B-VISION,HIPS,	1	C/F
1-1	AA64-00704B	WINDOW REMOCON;-;20S4,-,PC,V0,VIOLET,-	1	WR
1-2	AA64-00703D	KNOB POWER;-;20S4,T/S NO-SILK,ABS,HB,G36	1	KP
1-3	AA61-60003J	SPRING-CS;-;-,SUS304,0.5,OD6,H	1	SPRING
1-4	AA64-00705B	INDICATOR LED;-;20S4,-,ACRYL,-,CLR,-	1	IL
1-5	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	1	BADGE
1-6	AA63-00270A	GRILLE-WOOFER,L;DP,20S4,63-00204B 11.5kg	1	GRILLE
	AA63-00271A	GRILLE-WOOFER,R;DP,20S4,63-00205B 11.5kg	1	GRILLE
1-7	AA63-00202C	COVER-CONTROL;-;20S4,GD906P EPG NT,HIPS,	1	CC
1-8	AA63-00226B	COVER-TOP,LATIN;-;20S4,T/SOUND,ABS,LG TR	1	C-TOP
1-9	AA96-01249A	ASSY PCB P-A/V FRONT;15/19/20,K15D	1	A-A/V
1-10	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	1	
1-11	AA64-00702B	KNOB CONTROL;-;20S4,-,ABS,HB,G3676	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13	AA96-00287A	ASSY SPEAKER;-;8ohm,15W,001115/001088,AA	1	A/SPK
1-14	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	12	SPK+CF
2	AA03-10029X	CRT-COLOR;A48KRD82X(H),0MG,SEMI-TINT.	1	CRT
2-1	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-00701F	CABINET BACK;20S4,HIPS,HB,G4309	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	6	CB+CF
3-2	AA42-00005A	ANT ROD;;1000MM,5SECTIONS	1	A/ROD
4	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

6-6 CT2188BWX/XAX


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

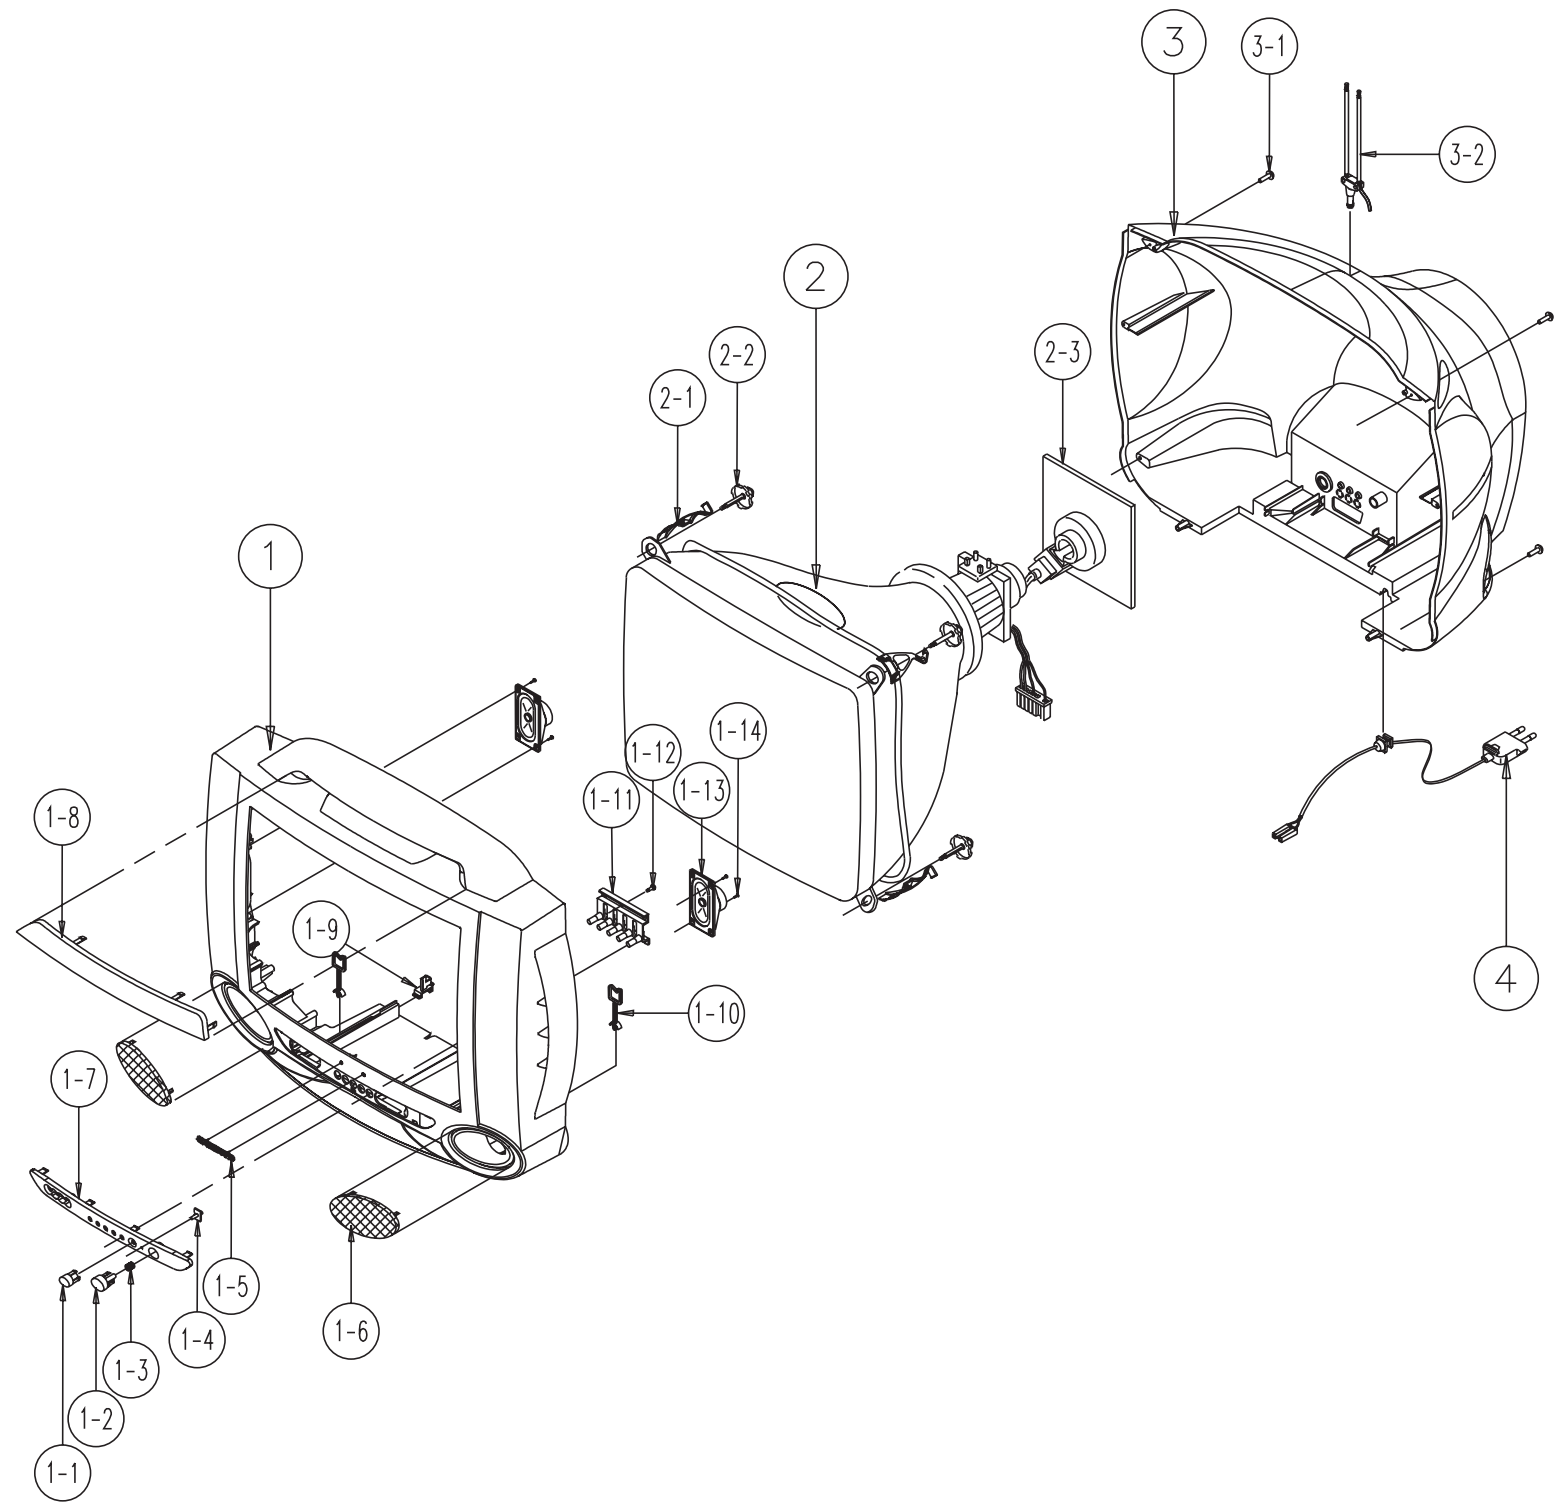

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-00908C	CABINET-FRONT;21S6,HIPS,HB,G4309,SV704P	1	F/C
1-1	AA64-00713B	WINDOW REMOCON;-;21S4,-;PC,V0,VIOLET,-	1	WR
1-2	AA64-00711C	KNOB POWER;-;21S4,NO-SILK,ABS,HB,G3676	1	KP
1-3	AA61-60003J	SPRING-CS;-;SUS304,0.5,OD6,H	1	SPRING
1-4	AA64-00714B	INDICATOR LED;-;21S4,-;ACRYL,-;CLR,-	1	IL
1-5	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	1	BADGE
1-6	AA63-00305A	GRILLE-WOOFER,L;DP,21S3,-;-;-;-;-;AA63	1	GRILLE
	AA63-00304A	GRILLE-WOOFER,R;DP,21S3,-;-;-;-;-;AA63	1	GRILLE
1-7	AA63-00206D	COVER-CONTROL;-;21S4,GD906P EPG NT,HIPS,	1	CC
1-8	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	1	CWFC
1-9	AA64-00709B	KNOB CONTROL;-;21S4,-;ABS,HB,G3676	1	KC
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-11	3001-001115	SPEAKER;15W,80HM,93DB+-2DB,110	2	SPK
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	12	SPK+CF
1-13				
1-14				
2	AA03-10024U	CRT-COLOR;A51KQJ63X(HB)-;21inch,-;-;-;1	1	CRT
2-1	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-2	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-00188A	CABINET-BACK;-;HIPS,HB,G4309	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	6	CB+CF
3-2	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN	1	A/ROD
4	AA96-20112A	ASSY-POWER,CORD;EP2/NP,H/C300	1	PWR/AC

6-7 CT21D8BWFX/XAX


You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

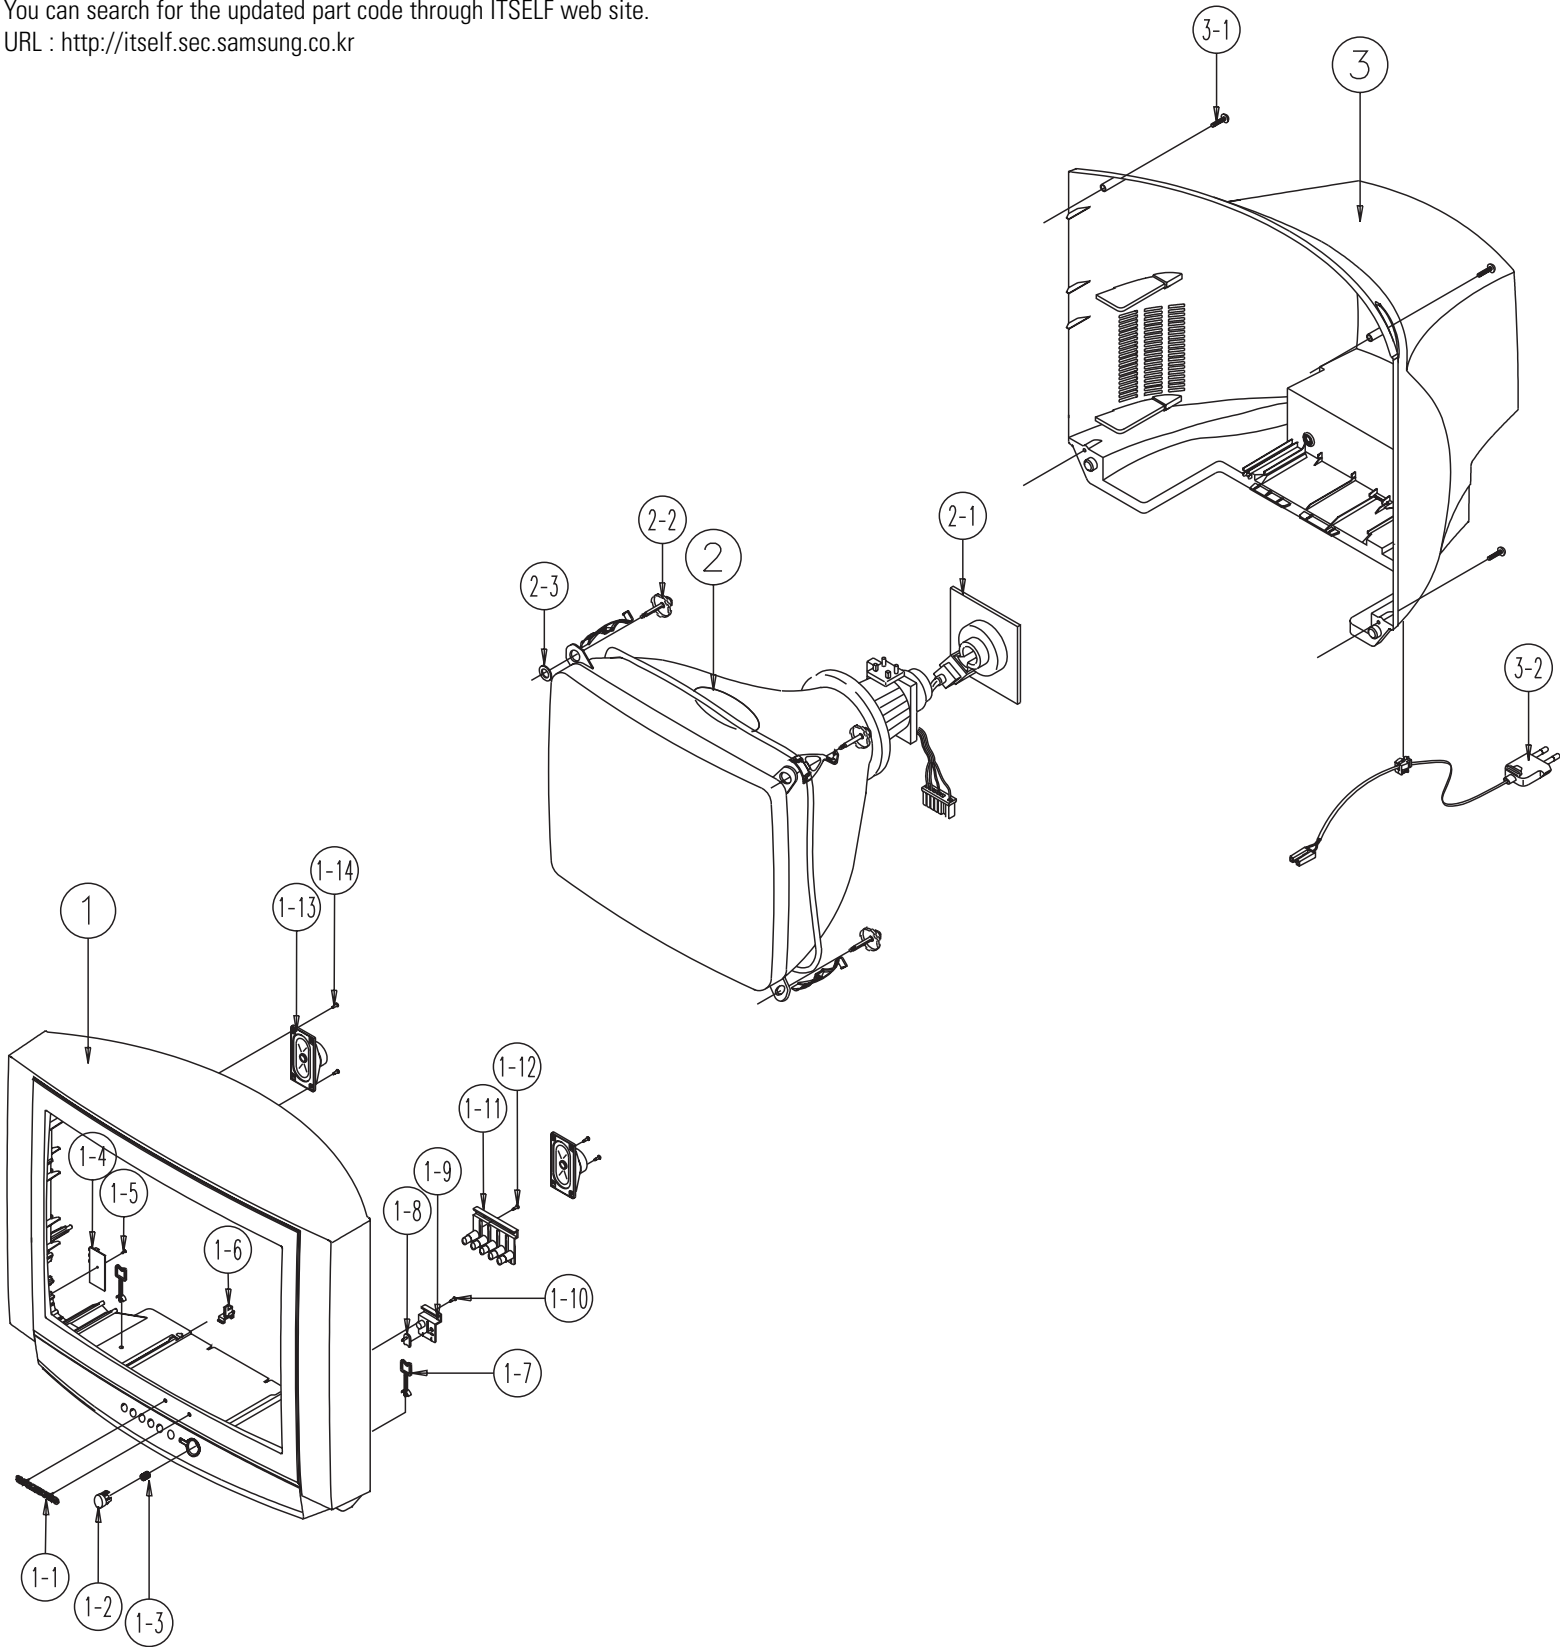

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-01423J	CABINET FRONT;21D8,SV907P EDBV,HIPS,HB,G	1	C/F
1-1	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	1	BADGE
1-2	AA64-01425B	KNOB POWER;21D8,ABS,-,G3676,SV907P,HB,-,	1	KP
1-3	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,OD6,H	1	SPRING
1-4	AA96-01234A	ASSY PCB P;A/V SIDE,20,K15D	1	A/A-V
1-5	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZP	1	PAS+CF
1-6	AA61-40113A	STOPPER-PCB;-,-ABS,HB,NTR.	1	STOPPE
1-7	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	1	CW/FC
1-8	AA64-01011B	INDICATOR LED;29D8,ACRYL,-,CLR,-,-,-	1	IL
1-9	AA64-01426B	WINDOW REMOCON;21D8,PC,-,-,-,VOILET,-,-	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-01012B	KNOB CONTROL;29D8,ABS,-,G3676,SV-907P,HB	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13	3001-000274	SPEAKER-GENERAL;5W80HM100X50MM	2	SPK
1-14	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	8	SPK+CF
2	AA03-10024U	CRT-COLOR;A51KQJ63X(HB)-,21inch,-,-,-,1	1	CRT
2-1	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	4	CDCOIL
3	AA64-01422E	CABINET BACK;21D8,HIPS,-,-,-,HB,G4309,-	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20112A	ASSY-POWER,CORD;EP2/NP,H/C300	1	PWR/AC

6-8 CT21D8WFX/STR

You can search for the updated part code through ITSELF web site.
URL : <http://itself.sec.samsung.co.kr>

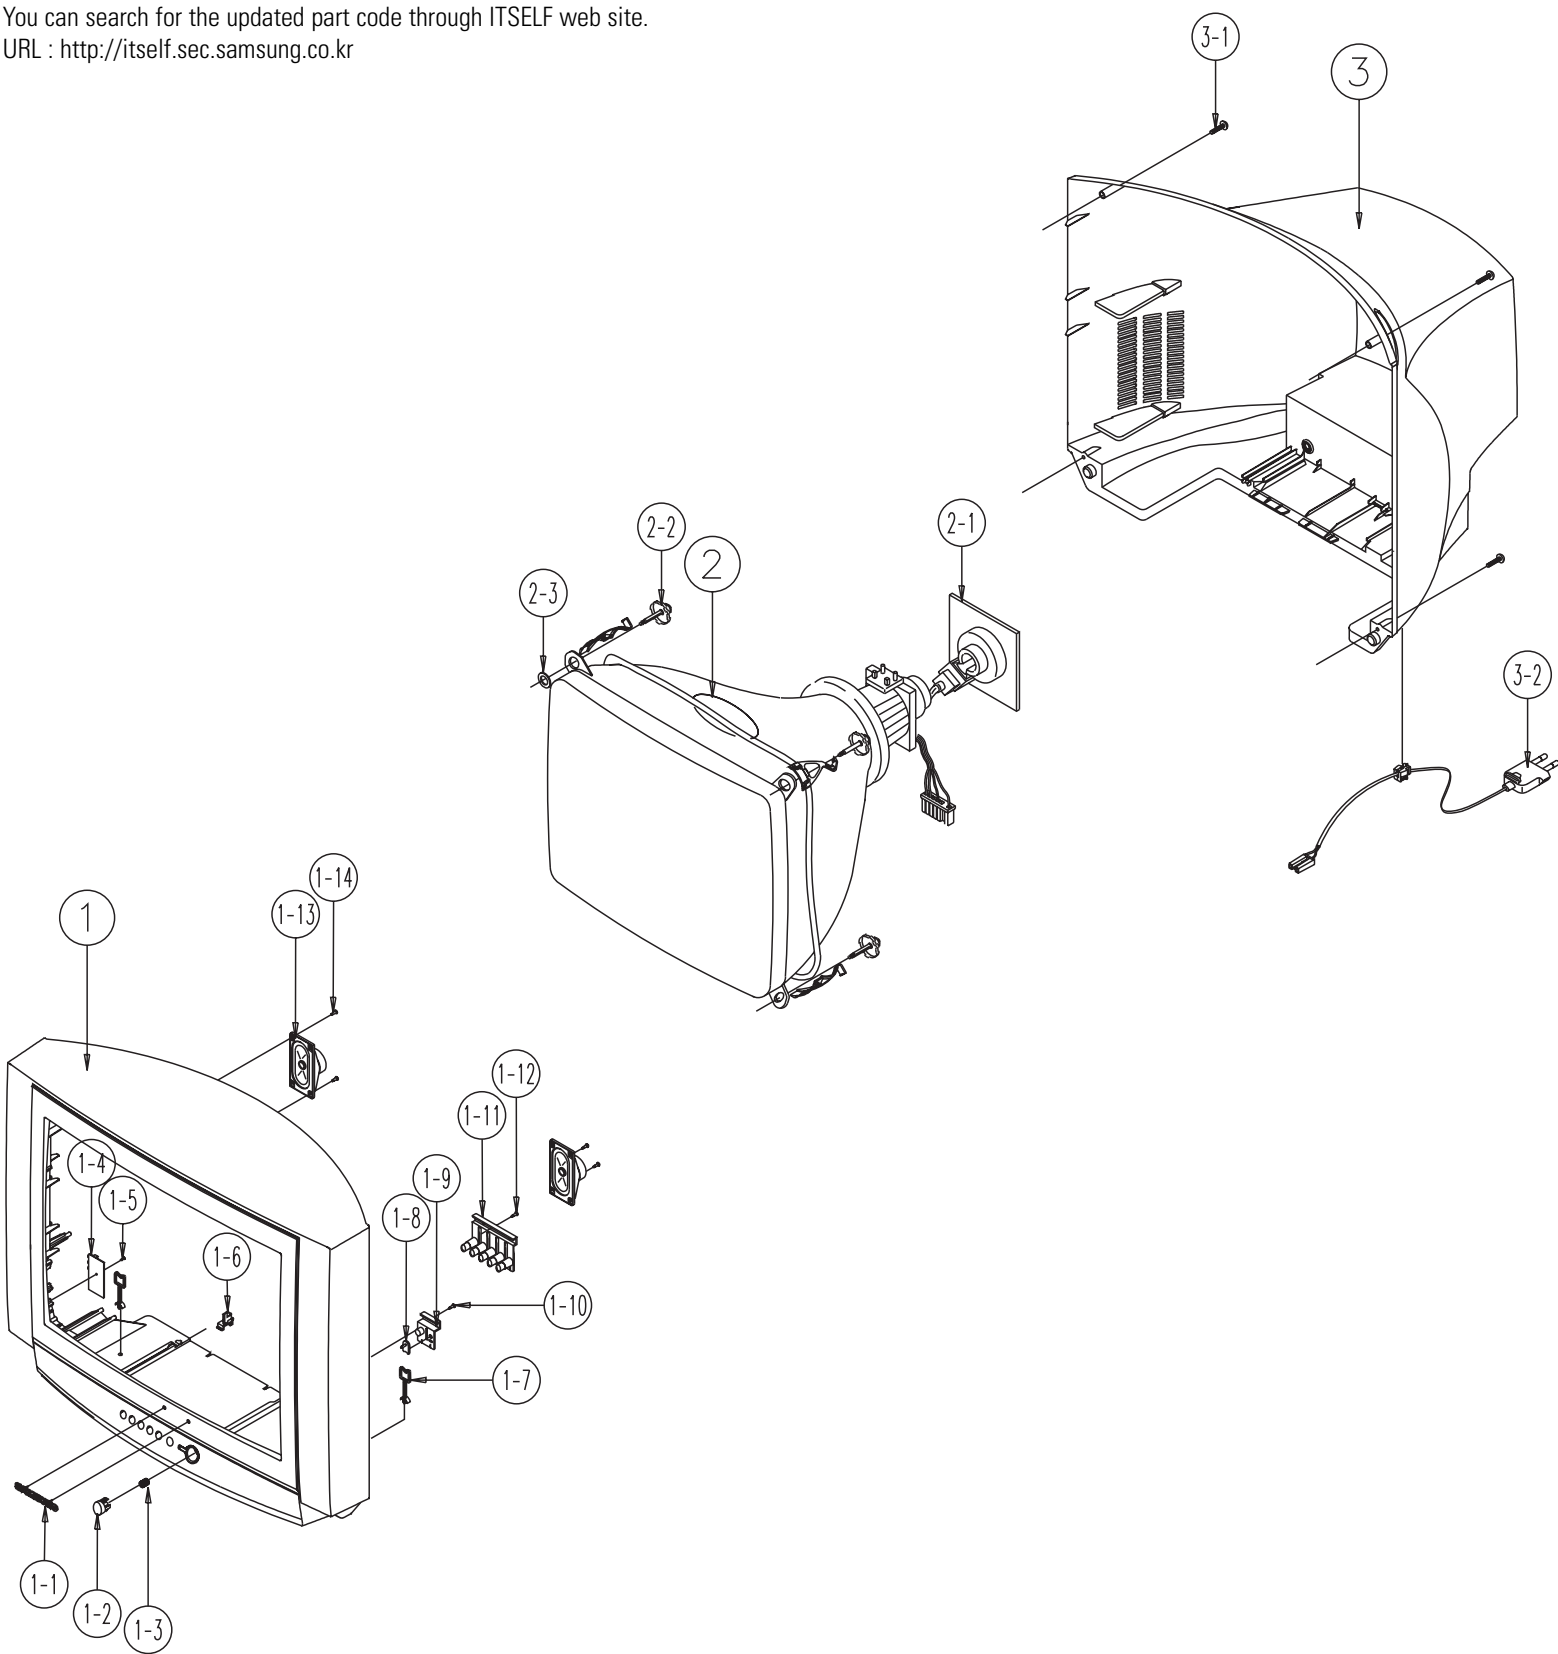

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-01423J	CABINET FRONT;21D8,SV907P EDBV,HIPS,HB,G	1	C/F
1-1	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	1	BADGE
1-2	AA64-01425B	KNOB POWER;21D8,ABS,-,G3676,SV907P,HB,-	1	KP
1-3	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,OD6,H	1	SPRING
1-4	AA96-01234A	ASSY PCB P;A/V SIDE,20,K15D	1	A/A-V
1-5	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZP	1	PAS+CF
1-6	AA61-40113A	STOPPER-PCB;-,-,ABS,HB,NTR.	1	STOPPE
1-7	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	1	CW/FC
1-8	AA64-01011B	INDICATOR LED;29D8,ACRYL,-,CLR,-,-,-	1	IL
1-9	AA64-01426B	WINDOW REMOCON;21D8,PC,-,-,-,VOILET,-,-	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-01012B	KNOB CONTROL;29D8,ABS,-,G3676,SV-907P,HB	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13	3001-000274	SPEAKER-GENERAL;5W80HM100X50MM	2	SPK
1-14	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	8	SPK+CF
2	AA03-10027E	CRT-COLOR;A51KQJ63X(H)21inch,0mg,90deg	1	CRT
2-1	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI	4	CDCOIL
3	AA64-01422E	CABINET BACK;21D8,HIPS,-,-,-,HB,G4309,-	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

7. Electrical Parts List

7-1 MR20300FX/TCE

Loc. No.	Code No.	Description ; Specification	Remark
ASSY CHASSIS			
1	A/CHAS	AA91-05605A ASSY CHASSIS;K15D,20,MONO,TCE,MR20300	
2	A/MAIN	AA94-12020A ASSY PCB MAIN;K15D,20,MONO,TCE,MR20300	
3		0204-000442 SOLVENT;CH3-CH5H-CH396%IM-1000	
3		0202-000008 SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37	
3		0204-001024 FLUX;DF-96TVS,-,20%,-	
3		0202-000187 SOLDER-WIREFLUX;-RS60S,D1.2,6	
3	Q401	0502-001115 TR-POWER;KSC5386,NPN,50W,T0-3PF,ST,8	
3	IC902	1103-001209 IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP,8	
△3	CR401S	2303-001015 C-FILM,PPFF;5.5NF,5%,1.6KV,TP	
△3	SF101S	2904-001221 FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M	
3	SWN01	3404-000295 SW-TACT,V;KPT1122R1KEYSTT=0.3M	
△3	FP801S	3601-001012 FUSE-FERRULE;250V,4A,SLOW-BLOW	
△3	V999S	3704-001105 SOCKET-CRT;11P20PI,26.5PI,NL,-	
3	CN704	3711-002646 POST-HEADER;67094-007(AUTO)	
3	JA701	3722-000162 JACK-PIN;2P3,4MM,-,SN	
△3	IC201S	AA09-00318A IC MICOM;TDA9377PS/N2/AI,SPM-458AN1,64P,	
△3	T801S	AA26-00172A TRANS-SWITCHING;EER3543,K15D,90-264,PM2A	
△3	T444S	AA26-00065A TRANS FBT;-FSV-14A004C(S),14-22,125V	
△3	T401	AA26-50001B ORIZ.DRIVE;-7.1MH,102UH,10-2	
△3	LR401S	AA27-00053A COIL-LINEARLITY;-193uH,DR10X10 C:4.35,7	
△3	LX801S	AA29-30001D FILTER-LINE;-6.0MH,2A,-,SQ191	
3	RM901	AA32-00015A MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M	
3	CN501	AA39-20620B LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m	
△3	TU01S	AA40-00073A TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75	
3	IC301	AA96-00244A ASSY H/S;-AA62-00046A,LA7840,-	
4		0205-000129 GREASE-SILICON;SC102,JAPAN	
4		1204-001483 IC-VERTICAL PROCESSO;LA7840,SIP7P,708MI	
4		6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	
4		AA62-00046A HEAT SINK-PS;-T1.0,-,D1(DREAM) 60X25X	
3	IC601	AA96-00244D ASSY H/S;-SOUND,AA62-00046A,TDA7266M,-	
4		0205-000129 GREASE-SILICON;SC102,JAPAN	
4		1201-001600 IC-AUDIO AMP;7266,ZSIP,15P,-,SINGLE,26dB	
4		6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	
4		AA62-00046A HEAT SINK-PS;-T1.0,-,D1(DREAM) 60X25X	
△3	IC802	AA96-00245A ASSY H/S;-AA62-00055A,KA7632,-	
4		1203-001939 IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI	
4		6003-000334 SCREW-TAPTITE;RH,+,2S,M3,L6,ZP	
4		AA62-00055A HEAT SINK-PS;-T1.0,-,35*15*25,D1,-,,-	
3	LD901	AA96-00555A ASSY LED GUIDE;-U,EX-LD-030,GREEN	
3	IC501	AA96-50311A ASSY-H/S;-VIDEO,AA62-30175D,TDA6107Q,-	
4		1201-001159 ICVIDEOAMP;TDA6107Q,ZIP,9P,300	
4		6003-000334 SCREW-TAPTITE;RH,+,2S,M3,L6,ZP	
4		AA62-30175D HEATSINK-PS;-SECC,T1.0,-,33X15X30FT-2	
△3	IC801S	AA96-00816A ASSY H/S;-POWER,AA62-00112A,SQ0765RT,TR	
4		0205-000129 GREASE-SILICON;SC102,JAPAN	
4		1203-001932 IC-PWM CONTROLLER;500765,T0-220F,5P,185M	
4		6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	
4		AA62-00112A HEAT SINK;TROJAN,AL1050,T2.0,W54.0,H40.	
△3	PWR/AC	AA96-00667A ASSY POWER CORD;-EP2N/P,H/C250,AA61-2004	
4		AA39-00238A POWER CORD;CT5066B6TX,EP2N/PL3000-0001,	
4		AA61-20070A HOLDER-CORD;PPVO,BLK,KE-0002	
3	C801	2401-002219 C-AL;220UF,20%,400V,-,25X40,10MM,ST	
△3	NT801S	1404-001045 THERMISTOR NTC;4.7OHM,15%,2900K,35.0MW,T	
△3	CY801S	2201-000446 C-CERAMIC,AC;CK45PE400V332-MIT	
3	JA703	3722-000184 JACK-RCA;2P3,4MM,-,AG	
3	JE601	3722-000143 JACK-PHONE;1P3,4MM,-,MBAG	
3	CN702A	AA39-20070D LEAD-CONNECTOR,ASSY;-YBNH025-07,67096-0	
3	CN603	3711-002642 POST-HEADER;67094-003(AUTO)	
△3	PT801S	1404-001264 THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
△3	PC801S	0604-001038 PHOTOCOUPLER;TR,130-260%,200MW	
△3	RL801S	3501-001040 RELAYPOWER;12VDC,500MW,10A,1FO	
3	GT101A	AA39-20010H LEAD-CONNECTOR,ASSY;-YFH800-01,S,1P,300,	
3	L/PQS	AA68-01018A LABEL-PQS;-50mmX,13,-,WHITE,-	
3	A/AUTO	AA97-13328A ASSY AUTO;K15D,20,MONO,TCE,MR20300	
4	D201	0401-000005 DIODE;1N4148,100V,300mA,1V,8nS,TAPING	
4	D601	0401-000005 DIODE;1N4148,100V,300mA,1V,8nS,TAPING	

Loc. No.	Code No.	Description ; Specification	Remark
△4	D811	0401-000005 DIODE;1N4148,100V,300mA,1V,8nS,TAPING	
△4	D804	0401-000005 DIODE;1N4148,100V,300mA,1V,8nS,TAPING	
△4	D808	0401-000005 DIODE;1N4148,100V,300mA,1V,8nS,TAPING	
△4	D803	0401-000006 DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2	
4	D303	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41	
△4	D809	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41	
4	D902	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41	
4	D501	0402-000254 DIODE-RECTIFIER;RGP10J,600V,1A,DO-41	
△4	D807	0402-000493 DIODE-RECTIFIER;1R5GU41,400V,1	
4	D302	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.5	
4	D301	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
4	D304	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
4	D401	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
4	D502	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
4	D503	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
4	D504	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
△4	D812	0402-001105 DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-	
△4	D801S	0402-001111 DIODE-RECTIFIER;1N5397GP600V,1.5A,DO-2	
△4	D802S	0402-001111 DIODE-RECTIFIER;1N5397GP600V,1.5A,DO-2	
△4	D803S	0402-001111 DIODE-RECTIFIER;1N5397GP600V,1.5A,DO-2	
△4	D804S	0402-001111 DIODE-RECTIFIER;1N5397GP600V,1.5A,DO-2	
4	DZ211	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ401	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ402	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ903	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ904	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ905	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
4	DZ803	0403-000699 DIODE-ZENER;TZP27B,27V,27-30.8	
4	DZ101	0403-000700 DIODE-ZENER;TZP33A,33V,31-35V,	
4	DZ303	0403-000700 DIODE-ZENER;TZP33A,33V,31-35V,	
4	DZ604	0403-000719 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ201	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ202	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ205	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ306	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ307	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ806	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ807	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001140 DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,	
4	DZ204	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
4	DZ302	0403-001221 DIODE-ZENER;UZ39SB,35.36-37.19V,500MW,D	
4	DZ802	0403-001318 DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO	
4	DZ901	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	DZ805	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	Q201	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q901	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q402	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	Q202	0501-002183 TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100	
4	Q601	0501-002183 TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100	
4	Q802	0501-002183 TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100	
4	R207	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
4	R905	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
4	R906	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
4	R206	2001-000010 R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R301	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R843	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4m	
4	R409	2001-000022 R-CARBON(S);330HM,5%,1/2W,AA,T	
4	R823	2001-000037 R-CARBON(S);330OHM,5%,1/2W,AA,TP	
4	R808	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,TP	
4	R902	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
4	R904	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	

Loc. No.	Code No.	Description ; Specification	Remark
4	R287	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R211	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R233	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R501	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R502	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R506	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R510	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R511	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R512	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R909	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R911	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R912	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R913	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R914	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R917	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R933	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R934	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R942	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R943	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R606	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R224	2001-000290 R-CARBON;1Kohm,5%,1/8W,AA,TP	
4	R807	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R842	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R833	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R225	2001-000325 R-CARBON;120OHM,5%,1/8W,AA,TP	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP	
4	R218	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R220	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R607	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R214	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R708	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R830	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP	
4	R927	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R203	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R212	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.390HM,5%,1/2W,AA	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA	
4	R303	2003-002238 R-METAL OXIDE(S);1.3OHM,5%2W,AF,TP,3.9X10	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA	
4	R411	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA	
4	R405	2001-001187 R-CARBON(S);75OHM,5%,1/2W,AA,T	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4	R402	2003-002178 R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	

Loc. No.	Code No.	Description ; Specification	Remark
4	R316	2003-000652 R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12MM	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-001023 R-METALOXIDE(S);120OHM,5%,2W,A	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R834A	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R423	2004-001373 R-METAL,FILM;RM1/2T100K-F	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA	
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA	
4	R304	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF	
4	R305	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);1OHM,5%,2W,AF,TP	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3	
4	R422	2008-001011 R-FUSIBLE(S);0.18OHM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.18OHM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM	
△	CR409S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000599 C-CERAMIC,DISC;560PF,10%,500V	
△	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C226	2202-000829 C-CERAMIC,MLC-AXIAL;820pF,10%,50V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5	
4	C604	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C805	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5M	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	

Loc. No.	Code No.	Description ; Specification	Remark
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WVTAPG250V10	
4	CE01	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WVTAPG50V2.2	
4	C212	2401-000660 C-ELECTROLYTIC;CE04WVTAPG50V2.2	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	C901	2401-002144 C-AL;47uF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C206	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C820	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47uF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C406	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-.3A,-,3.5x5,TP,-	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J127	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
△	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J806	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J118	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	01VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1L,B,1.6T,245	
4	EY401	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY402	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY403	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY404	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY405	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY414	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY415	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY416	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY417	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY418	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY419	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY420	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY421	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY501	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY819	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY827	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY829	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY833	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY701	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EY702	AA60-40011A EYELET;-.ID2.0,0D2.8,-,BSP	
4	EL401	AA60-40011B EYELET;-.ID2.2,0D3.2,-,BSP	
4	EL402	AA60-40011B EYELET;-.ID2.2,0D3.2,-,BSP	
4	EL801	AA60-40011B EYELET;-.ID2.2,0D3.2,-,BSP	
4	EL802	AA60-40011B EYELET;-.ID2.2,0D3.2,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT101	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	

Loc. No.	Code No.	Description ; Specification	Remark
4	Z201	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-
4	RE01	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4m
4	RE02	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4m
4	R816	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4m
4	C915	2401-002009	C-AL;100UF,20%,16V,GP,TP,6.3X7
4	R505	2008-000264	R-FUSIBLE(S);10HM,5%,1W,AF,TP,
△	CR403S	2306-000179	C-FILM,MPPF;300nF,5%,250V,TP,20x18.5x10.
4	C815	2401-000703	C-ELEC;CE04-40/8525VT222-MWSD
4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
4	C816	2201-000375	C-CERAMIC,DISC;220PF,5%,50V,RH
4	IC803	1203-001217	IC-POST,ADJUSTREG;431,T0-92,3P,4.58MIL,P
4	R803	2003-002102	R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm
4	R804	2003-002102	R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm
4	R805	2001-001170	R-CARBON(S);6.80HM,5%,1/2W,AB,
4	R850	2001-001170	R-CARBON(S);6.80HM,5%,1/2W,AB,
4	R817	2004-001377	R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4
4	R818	2001-001154	R-CARBON(S);5.1KOHM,5%,1/2W,AB
4	R819	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4
4	R820	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4
4	R832	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4
4	R822	2004-001983	R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4
4	R608	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm
4	R609	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm
4	C603	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5
4	R821	2001-001125	R-CARBON(S);300KOHM,5%,1/2W,AA
4	C810	2301-000192	C-FILM,PEF;1nF,5%,50V,5.3X10MM
4	DZ804	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO
4	R831	2001-001197	R-CARBON(S);910OHM,5%,1/2W,AB,TP,2.4X6.4
4	L802	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,
4	L803	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,
4	C232	2301-000289	C-FILM,PEF;5.6nF,5%,50V,6.5X5.
4	L/LINE	AA68-01544A	LABEL;LINE,ALL MDL COMMON

ASSY COVER/FRONT

1	A/CFRN	AA90-01366A	ASSY COVER/FRONT;MR20300X/TCE
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR
2	STOPER	AA61-40007A	STOPPER-PCB;-ABSHB,-,-,NTR,50
2	GRILL	AA63-50096D	GRILLE WOOFFER;DP;5073.63-50095E
2	SPK/FE	AA63-60001Z	SPACER-FELT;-FELT,T1.0,-,35X8
2	F/C	AA64-00233J	CABINET FRONT;5073,SV809P EPN,HIPS,HB,G4
2	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	BOSS	AA61-40010A	BOSS-CABINET;-HIPS,HB,BLK,
3	SPRING	AA61-60003T	SPRING-CS;-,-,SUS304,0.5,0D7,H
3	KC	AA64-10039C	KNOB-CONTROL;-5073,-,ABS,HB,GRAY
3	KP	AA64-10131F	KNOB POWER;5073,ABS,-,GRAY,NO-SILK,HB,-,
3	WR	AA64-40044A	WINDOW-REMOCON;-ABS,HB,-,NO-S
3	IL	AA64-40182A	INDICATOR-LED;-ACRYL,-,-,50
2	BADGE	AA64-70120A	BADGE-BRAND;ALL RCA L30 7.5
2	DRESPK	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	CLW/HS	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	FBT	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	CW/FC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	A/SPK	AA96-10141B	ASSY-SPEAKER;-80HM,3W,3001-001020,AA39-
3	SPK	3001-001020	SPEAKER;3W,8ohm,90dB,140Hz
3	L/SPK	AA39-20501C	LEAD CONNECTOR-ASSY;-67096-003,REC,3(2)
2	PAV+CF	6006-001095	SCREW-ASS'Y TAPT;WPBH,+,M4,L12,ZPC(YEL)

ASSY COVER/REAR

1	A/REAR	AA90-01643A	ASSY COVER/REAR;MR20300X/TCE
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	BCFELT	AA63-60001U	SPACER-FELT;-FELT,T0.5,-,150X15
2	B/C	AA64-30775G	CABINET-BACK;HIPS,HB,G4309,5073
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-
2	H/T	AA61-00356B	HOLDER-TUNER,F/JACK;-501F,ABS,HB,BLK,-
2	PWR-TA	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y

ASSY BOX

1	A/BOX	AA92-07471A	ASSY BOX;K15D,5073,TCE,MEXICO
2	PK	AA69-01718A	PACKING-CASE; CT5073,KRAFT-LINER

ASSY LABEL

1	A/LABE	AA92-07472A	ASSY LABEL;K15D,20,TCE,MEXICO
2	INLAB	AA64-02055A	INLAY BACK;CAUTION,BLK,LGRY-TXT,23X93,W/
2	A/LABE	AA68-02364A	ASSY-LABEL;ART-PAPER,MEXICO,TCE,RCA

ASSY P/MATERIAL

1	A/PACK	AA92-02691A	ASSY P/MATERIAL;MR20300X/TCE
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	PE-BAG	AA69-01208A	BAG;SHEET;19-20,W42,L50,FOAM,OEM
2	C/SET	AA69-01222A	CUSHION SET;SET,TCE,EPS,FOAMED

ASSY CPT

1	A/CPT	AA91-05632A	ASSY CPT;A48KRD82X(DH),+380MG,20INCH
△	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	CRT	AA03-00087A	CRT-COLOR;-A48KRD82X(DH),+380MG,20INCH,
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-0B,29.1M
2	D-COIL	AA27-00254A	COIL DEGAUSSING;20INCH,10%,70TS,4.50HM,
2	D-Y	AA27-50004W	DEFL-YOKE;-DSE-1992LL(1H),20"/A48KRD82X
2	HDCOIL	AA61-00734A	HOLDER;25POLYVINYLL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A	SPACER-DY;-NEOPRENE,-,BLK,V0W
2	A/TBC	AA98-70014B	ASSY-TBC,WIRE;20,NTSC,1P
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	CRT+DC	0203-001160	TAPE FILAMENT SCOTCH#8915,T0.16,W24,L0.1

ASSY ACCESSORY

1	A/ACCE	AA92-07231A	ASSY ACCESSORY;K15D,20,RCA,MEXICO
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA
2	T/MATC	AA26-90001F	TRANS-MATCHING;-3000HM/750HM,NTSC,40-89
2	A/ROD	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN
2	RMT	AA59-00022G	REMOCON;DP,TM59,AA59-00021G,-,-,-,-,
2	I/B2	AA68-02347A	MANUAL USERS;-ENG,MEXICO,W/P100(G),B5,K1
2	I/B	AA68-02348A	MANUAL USERS;-SPA,MEXICO,W/P100(G),B5,K1
2	BAG-PE	AA69-01196A	BAG PE;CR20805X,LDPE, 93/4X151/2,(ACC

7-2 CT1488BLFX/XAP

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05611A	ASSY CHASSIS;K15D,14,L/STEREO,LATIN,CT1
2	CLW/HS	AA65-30018A	CLAMP-WIRE;-;NYLON6.6,-;D,ATL
2	FBT	AA65-30018A	CLAMP-WIRE;-;NYLON6.6,-;D,ATL
2	A/MAIN	AA94-12026A	ASSY PCB MAIN;K15D,14,L/STEREO,LATIN,CT
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3.63/37
3		0204-001024	FLUX;DF-96TVS,-;20%,-
3		0202-000187	SOLDER-WIREFLUX;-;RS60S,D1.2,6
3	IC601	AA96-00244B	ASSY H/S;-;AA62-00046A,TDA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-;DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+;2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-;D1(DREAM) 60X25X
4	IC802	AA96-00245A	ASSY H/S;-;AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG.;7632,SIP,10P,-;PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+;2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-;T1.0,-;35*15*25,D1,-;,-
3	LD901	AA96-00555A	ASSY LED GUIDE;-;UJEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY-H/S;-;VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	IC-VIDEOAMP,TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+;2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-;SECC,T1.0,-;33X15X30FT-2
3	IC801S	AA96-00816A	ASSY H/S;-;POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,T0-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+;2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050 ,T2.0,W54.0,H40.
3	C801	2401-002219	C-AL;220UF,20%,400V,-;25X40,10MM,ST
3	NT801S	1404-001045	THERMISTOR NTC;4.7OHM,15%,2900K,35.0MW,T
3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-MIT
3	CN604	3711-002643	POST-HEADER;YW025-04(AUTO)
3	CR402S	2306-000195	C-FILM,MPPF;360NF,5%,400V,26.0
3	GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY;-;YFH800-01,S,1P,300,
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,T0-3PF,ST.8
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8BIT,DIP.8
3	CR401S	2303-001015	C-FILM,PPFF;5.5NF,5%,1.6KV,TP
3	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT,V;KPT1122R1KEYSTT-0.3M
3	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
3	V999S	3704-001089	SOCKET CRT;9P,22.5PI,12PI,SN,13
3	CN705	3711-002641	POST-HEADER;67094-010(AUTO)
3	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/AL,SPM-458AN1,64P,
3	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
3	T444S	AA26-00065A	TRANS FBT;-;FSV-14A004C(S),14-22,125V
3	T401	AA26-50001B	ORIZ.DRIVE;-;7.1MH,102UH,10-2
3	LR401S	AA27-00053A	COIL-LINEARLITY;-;193uH,DR10X10 C:4.35,7
3	LX801S	AA29-30001D	FILTER-LINE;-;6.0MH,2A,-;SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620A	LEADCONNECTOR-ASSY;-;YBNH025-09,S,9P,30
3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
3	IC301	AA96-00244A	ASSY H/S;-;AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSQ;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+;2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-;D1(DREAM) 60X25X
3	PWR/AC	AA96-00570A	ASSY POWER CORD;-;CP2/NO,H/C200,KKP419C,
4		AA39-10006X	POWER-CORD;-;KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PP,V0,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-PQS;-;50mmX13,-;WHITE,-
3	A/AUTO	AA97-13339A	ASSY AUTO;K15D,14,L/STEREO,LATIN,CT1488
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41
4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;

Loc. No.	Code No.	Description ; Specification	Remark
4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-;
4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ803	0403-001039	DIODE ZENER;MA2560,56V,52-60V,1W,DO-41,T
4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO
4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D
4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
4	R207	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	R905	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	R906	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	RS602	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R301	2001-000016	R-CARBON(S);10OHM,5%,1/2W,AA,TP
4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm
4	R409	2001-000022	R-CARBON(S);330OHM,5%,1/2W,AA,T
4	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,
4	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,
4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
4	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R233	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R914	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R917	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R933	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
4	R934	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4 R942	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,	
4 R943	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,	
4 RS608	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,	
4 RS609	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,	
4 R291A	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R612	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 RS612	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 RS614	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 RS610	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R225	2001-000325	R-CARBON;120OHM,5%,1/8W,AA,TP,	
4 R205	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4 R218	2001-000411	R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4 R602	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R604	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R926	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R944	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS601	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS606	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS607	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R918	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4 R940	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4 R941	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4 R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4 R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4 R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4 R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4 R214	2001-000490	R-CARBON;200OHM,5%,1/8W,AA,TP,	
4 R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4 R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,	
4 R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,	
4 R225	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,	
4 R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4 R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4 R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4 R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4 R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,	
4 R110	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R915	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4 R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4 R605	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4 R212	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R215	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R610	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R408	2001-001037	R-CARBON(S);0.390HM,5%,1/2W,AA,	
4 R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,	
4 R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA,	
4 R840	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,	
4 R411	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,	
4 R405	2001-001195	R-CARBON(S);820HM,5%,1/2W,AA,T	
4 R503	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4 R501M	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4 R502M	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4 RY801S	2002-001013	R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4 R402	2003-002178	R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4 R316	2003-002009	R-METALOXIDE(S);390OHM,5%,2W,A	
4 R413	2003-000664	R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4 R403	2003-002173	R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4 R827	2003-000998	R-METALOXIDE;300OHM,5%,2W,AF,T	
4 R407	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R834	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R603	2004-000195	R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4 R423	2004-004089	R-METAL;123KOHM,1%,1/2W,AA,TP,2.5X6.5	
4 R302	2004-001390	R-METAL(S);1KOHM,2%,1/2W,AA,TP	
4 R306	2004-001390	R-METAL(S);1KOHM,2%,1/2W,AA,TP	
4 R424	2004-001402	R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4 R219	2004-001914	R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4 R304	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4 R305	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4 R801	2008-001107	R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4 R825	2008-000266	R-FUSIBLE(S);1OHM,5%,2W,AF,TP,	
4 R303	2008-000266	R-FUSIBLE(S);1OHM,5%,2W,AF,TP,	
4 R608	2008-000284	R-FUSIBLE(S);0.1OHM,10%,2W,AF,TP,3.9X10M	

Loc. No.	Code No.	Description ; Specification	Remark
4 R609	2008-000284	R-FUSIBLE(S);0.1OHM,10%,2W,AF,TP,3.9X10M	
4 R824	2008-000294	R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4 R422	2008-001011	R-FUSIBLE(S);0.18OHM,10%,2W,AF	
4 R420	2008-001047	R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4 C806	2301-001435	C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
4 C501	2201-000193	C-CERAMIC,DISC;10PF,0.25PF,50V	
4 C302	2201-000259	C-CERAMIC,DISC;180PF;10%,500V,Y5P,6X4MM,	
4 CR409S	2201-000406	C-CERAMIC,HIC;CK45(T)B2KV271-K	
4 C908	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NPO	
4 C909	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NPO	
4 C408	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	
4 CR404S	2201-000639	C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4 C503	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4 C811	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	
4 C814	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	
4 C105	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C111	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C912	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C602	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C505	2202-000106	C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4 C226	2202-000231	C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4 C211	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4 C502	2301-000213	C-FILM,PEF;220NF,5%,250V,21.5X	
4 C109	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C804	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C309	2301-000254	C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4 C227	2301-000301	C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4 C217	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4 C234	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4 C805	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4 C407	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4 C248	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4 C420	2301-001065	C-FILM,MPPF;47NF,55,630V,TP,19	
4 C312	2305-000149	C-FILM;CF922N100VT104-J-40/105	
4 C301	2305-000285	C-FILM,MPEF;220NF,5%,100V,-5M	
4 C215	2305-000289	C-FILM,MPEF;220NF,5%,63V,-5MM	
4 C216	2305-000289	C-FILM,MPEF;220NF,5%,63V,-5MM	
4 C233	2305-000289	C-FILM,MPEF;220NF,5%,63V,-5MM	
4 CR405S	2305-000382	C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4 C916	2305-000412	C-FILM,MPEF;470NF,5%,63V,-5MM	
4 C103	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C207	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C208	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C210	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C218	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C222	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C230	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C803	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C819	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C913	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C920	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 CS602	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 CS608	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C225	2309-000138	C-FILM,PE-PPF;100NF,5%,50V,TP,	
4 C812	2401-000262	C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4 C817	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C821	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C823	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 CS629	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C307	2401-000360	C-AL;100UF,20%,50V,GP,8X11MM,5	
4 C308	2401-000360	C-AL;100UF,20%,50V,GP,8X11MM,5	
4 C506	2401-000430	C-ELECTROLYTIC;CE04WTPAG250V10	
4 CS609	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	
4 CS620	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	
4 CS623	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	
4 C403	2401-000560	C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4 C219	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 C601	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS603	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS611	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS613	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS614	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS616	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4 CS617	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	

Loc. No.	Code No.	Description ; Specification	Remark
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C827	2401-000927 C-AL;22uF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	CS601	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	C802	2401-001192 C-AL;33uF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7uF,20%,250V,GP,10X12.5	
4	C304	2401-001397 C-AL;470uF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWVRG	
4	C209	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000uF,20%,25V,GP,TP,10X20	
4	C901	2401-002144 C-AL;47uF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10uF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10uF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10uF,20%,16V,GP,TP,5X11,2.5	
4	C820	2401-000050 C-AL;10uF,20%,16V,GP,TP,5X11,2.5	
4	CS612	2401-000050 C-AL;10uF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47uF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11,5.5	
4	C406	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100uF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-.3A,-,-.3.5x5,TP,-	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J822	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R850	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J133	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW04	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J127	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	01VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1L,B,1.6T,245	
4	EY401	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY402	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY403	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY404	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY405	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY414	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY415	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY416	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY417	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY418	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY419	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY420	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY421	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY501	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY819	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY827	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY829	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY833	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY701	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY702	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EL401	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL402	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL801	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL802	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	

Loc. No.	Code No.	Description ; Specification	Remark
4	GT805	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT101	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT806	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT301	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT302	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT401	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	GT402	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO
4	Z201	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-
4	C915	2401-002009	C-AL;100UF,20%,16V,GP,TP,6.3X7
4	R505	2008-000264	R-FUSIBLE(S);10HM,5%,1W,AF,TP,
4	C815	2401-000703	C-ELEC;CE04-40/8525VT222-MWSD
4	R421	2008-001018	R-FUSIBLE(S);0.470HM,10%,2W,AF
4	L802	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,
4	L803	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,
4	C603	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5
4	CS631	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5
4	C232	2201-000262	C-CERAMIC,DISC;180PF,10%,50V,Y
4	R809	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA
4	R810	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA
4	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9
4	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9
4	R831	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AB
4	L/LINE	AA68-01544A	LABEL;LINE,ALL MDL COMMON
4	D804	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	CS604	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm
4	CS615	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm
4	CS618	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm
4	CS619	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm
4	CS606	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m
4	CS607	2401-001334	C-ALUMINUM;470NF,20%,50V,GP,5*11MM,2MM,T
4	CS610	2401-001026	C-AL;3.3UF,20%,50V,GP,5X11MM,5
4	CS621	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y
4	CS624	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y
4	CS626	2201-000379	C-CERAMIC,DISC;22NF,+80-20%,50
4	CS632	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.
4	C604	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.
4	R220	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP
4	R288	2001-000908	R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R289	2001-000908	R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	RS603	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1
4	RS604	2004-005053	R-METAL;16.6KOHM,1%,1/8W,AA,TP,1.8X3.2MM
4	RS605	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP
4	R607	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,
4	RS613	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,
3	P803S	1404-001265	THERMISTOR-PTC;4.5OHM/100OHM,+30/-20%,22
3	JA701	3722-001453	JACK-RCA;3P,3.4mm,NI,BLK,-
3	ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6
3	D806	AA96-00243D	ASSY H/S,-,BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIERSDS60U20S,200V,6A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-,
3	ICS602	1203-001225	IC-POSIFIXEDREG.;78R09,TO-220,4P,-,PLA
3	JAW05	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A

ASSY COVER/FRONT

1	A/CFRN	AA90-01274A	ASSY COVER/FRONT;CT1488BL6X/XAP
2	SPK+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	PA+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050Q	SCREW-ASSY;WC,HH,M5,L26.5,SWRCH,
2	STOPPE	AA61-40113A	STOPPER-PCB;-ABS,HB,NTR.
2	GRILLE	AA63-00277A	GRILLE-WOOFER,L;DP,14S4,63-00218B 6.5kg,
2	GRILLE	AA63-00278A	GRILLE-WOOFER,R;DP,14S4,63-00219B 6.5kg,
2	F/C	AA64-00750B	CABINET FRONT;-14S4,SV704P EPG BIO2000,
3	IL+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	KF+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SPRING	AA61-60003J	SPRING-CS,-,SUS304,0.5,OD6,H
3	CC	AA63-00215B	COVER-CONTROL,A;-14S4,GD906P EPG NT,HIP
3	C/TOP	AA63-00227B	COVER-TOP,LATIN;-14S4,DG703PABS,LG TR5
3	SPACER	AA63-60001U	SPACER-FELT;-FELT,T0.5,-,150X15
3	KC	AA64-00752B	KNOB CONTROL;-14S4,-ABS,HB,G3676
3	KP	AA64-00753B	KNOB POWER;-14S4,NT NO-SILK,ABS,HB,G367

Loc. No.	Code No.	Description ; Specification	Remark
3	WR	AA64-00754B	WINDOW REMOCON;-14S4,-PC,VO,VIOLET,-
3	IL	AA64-00755B	INDICATOR LED;-14S4,-ACRYL,-,CLR,-
2	BADGE	AA64-70127F	BADGE-BRAND;AL,SS,SILVER,R800
2	CWIRE1	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	CWIRE2	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	CWIRFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	CWIRFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	A/A-V	AA95-00591A	ASSY-PCB,A/V FRONT;-CT1488BL6,K15A,-,-,
3	JR01	3722-001031	JACK-RCA;3P,3.6MM,#18,AU
3	CN705A	AA39-20067B	LEAD CONNECTOR-ASSY;-YBNH025-10,67096-0
3	00VER	AA41-00250A	PCB-FRONT A/V;K15A,1L,FR-1,245x245x1.6T,
2	A/SPK	AA96-00321A	ASSY SPEAKER;-8ohm,6W,001034/00320A,350
3	SPK	3001-001034	SPEAKER;6W,80HM,90DB,140HZ
3	L/SPK	AA39-00105A	LEAD CONNECTOR-ASSY;-,-,-,-,-,-,-,YS
3	H/SPK	AA91-00320A	ASSY HOLDER SPK;-,-,PIEZO ASSY,-,SILVER

ASSY COVER REAR

1	A/REAR	AA90-04235A	ASSY COVER REAR;K15D,14S4,G4309,HIPS,HB
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPACER	AA63-60001L	SPACER-FELT;-FELT,T0.35,-,150X15,-
2	B/C	AA64-00751E	CABINET BACK;14S4,HIPS,HB,G4309
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-,-

ASSY BOX

1	A/BOX	AA92-01952A	ASSY BOX;CT1488BL6X/XAP
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-00363B	PACKING CASE;14S4,AMERICA BIO2000,CB S-1

ASSY LABEL

1	A/LABE	AA92-06953A	ASSY LABEL;K15D,14,XAP
2	INLAYB	AA64-60385G	INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN

ASSY P/MATERIAL

1	A/PACK	AA92-02507A	ASSY P/MATERIAL;CT1488BL6X/XAP
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-00353A	CUSHION-SET;14S4,EPS,FOAMED,C=0.02.
2	PAD	AA69-00571A	PAD-KRAFT-LINER,305X150X22,CT1488BL6
2	PE-BAG	AA69-01207A	BAG,SHEET,9-13,W35,L42,FOAM,OEM

ASSY CPT

1	A/CPT	AA91-05649A	ASSY CPT;A34KQV42X,0MG,14
2	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	CRT	AA03-10002M	CRT-COLOR;-A34KQV42X,0MG,14,
2	C-Y	AA27-00001A	MAGNET-CONVERGENCE;JH225-06A,225MM
2	D-COIL	AA27-00241A	COIL DEGAUSSING;-CPT TV 14INCH;-10%,55
2	D-Y	AA27-50001K	DEFLECTION-YOKE;-DSE-1422FL,14/A34KQV4
2	CDCOIL	AA61-00735A	HOLDER;20POLYVINIL,DEGAUSSING,CHLORI
2	BWCOIL	AA63-10002B	BAND-TIE;-NYLON66V2,-,L140,NTR,-,-
2	SPACER	AA63-60028A	SPACER-DY;-NEOPRENE,-,BLK,VOW
2	A/TBC	AA98-70014A	ASSY-TBC-WIRE;14,NTSC,1P,TVI
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	CRT+DC	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY ACCESSORY

1	A/ACCE	AA92-06952A	ASSY ACCESSORY;K15D,14,XAP
2	AC/TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	T/MATC	AA26-90001F	TRANS-MATCHING;- ,3000HM/750HM,NTSC,40-89
2	A/ROD	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN
2	RMT	AA59-00108A	REMOCON;DP,TM59,AA59-00077A,-,-,-,-,-,
2	C/WARR	AA68-00987A	CARD WARRANTY;W/P100,A4,1P,SELA
2	I/B1	AA68-02660A	MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN
2	I/B2	AA68-02659A	MANUAL USERS;ENG,W/P100(G),B5,K15D,LATIN
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151

7-3 CT1991FX/SMS

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05280A	ASSY CHASSIS;K15D,19,AKAI
2	CLW/HS	AA65-30018A	CLAMP-WIRE;- ,NYLON6.6,- ,DATL
2	CWIRE2	AA65-30018A	CLAMP-WIRE;- ,NYLON6.6,- ,DATL
2	FBT	AA65-30018A	CLAMP-WIRE;- ,NYLON6.6,- ,DATL
2	A/MAIN	AA96-01056A	ASSY PCB P-MAIN;K15D,F/V,MONO,AKAI,19
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,TO-3PF,ST,8
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP8
△	CX801S	2306-000318	C-FILM,MPPF;220NF,20%,250V,-,2
△	CR401S	2303-001015	C-FILM,PPFF;5.5NF,5%,1.6KV,TP
△	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT,V;KPT1122R1KEYSTT=0.3M
△	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△	V999S	3704-001105	SOCKET-CRT;1P,20PI,26.5PI,Ni,-
3	JA701	3722-000162	JACK-PIN;2P3.4MM,-,SN
△	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/AI,SPM-458AN1,64P
△	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△	T444S	AA26-00065A	TRANS FBT;- ,FSV-14A004C(S),14-22,125V
△	T401	AA26-50001B	ORIZ DRIVE;- ,7.1MH,102UH,10-2
△	LR401S	AA27-00053A	COIL-LINEARLITY;- ,193uH,DR10X10 C:4.35,7
△	LX801S	AA29-30001D	FILTER-LINE;- ,6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m
△	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
3	IC301	AA96-00244A	ASSY H/S;- ,AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;- ,T1.0,-,D1(DREAM) 60X25X
3	IC601	AA96-00244D	ASSY H/S;- ,SOUND,AA62-00046A,TDA7266M,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001600	IC-AUDIO AMP;7266,ZSIP,15P,-,SINGLE,26dB
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;- ,T1.0,-,D1(DREAM) 60X25X
△	IC802	AA96-00245A	ASSY H/S;- ,AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;- ,T1.0,-,35*15*25,D1,-,,-
3	LD901	AA96-00555A	ASSY LED GUIDE;- ,UEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY H/S;- ,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	IC-VIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;- ,SECC,T1.0,-,33X15X30FT-2
△	IC801S	AA96-50395F	ASSY H/S;- ,POWER,AA62-30190A,5Q0740RT
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002466	IC-PWM CONTROLLER;KA5Q0740RT,TO220F-5L,5
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30190A	- ,SECC-CA,T1.0,-,,-,Cr03 A
3	C801	2401-000822	C-ELECTROLYTIC;CE04W200V220U-H
△	NT801S	1404-001045	THERMISTOR NTC;4.7OHM,15%,2900K,35.0MW,T
△	CY801S	2201-002002	C-CERAMIC,DISC;4700PF,20%,400V
3	CN603	3711-002642	POST-HEADER;67094-003(AUTO)
3	P803S	1404-001247	THERMISTOR-PTC;1.5OHM;+30/-20,110V,140VA
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000187	SOLDER-WIREFLUX;- ,RS60S,D1.2,6
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3	A/AUTO	AA97-12738A	ASSY AUTO;K15D,19,AKAI
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	DR003S	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△	D804	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D501	0402-000254	DIODE-RECTIFIER;RG10J,600V,1A,DO-41
△	DR001S	0402-000254	DIODE-RECTIFIER;RG10J,600V,1A,DO-41
△	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5

Loc. No.	Code No.	Description ; Specification	Remark	
△	4	D805	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
	4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	DR002S	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ803	0403-001039	DIODE ZENER;MA2560,56V,52-60V,1W,DO-41,T
	4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
	4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
	4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
	4	DZ302	0403-001221	DIODE-ZENER;UZ39BS,35.36-37.19V,500MW,D
	4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO
	4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,DO
	4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
	4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
△	4	QR001S	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
	4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
	4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
	4	R207	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
	4	R905	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
	4	R906	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
	4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
	4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm
	4	R409	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,T
	4	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP
	4	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,TP
	4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R287	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP
	4	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R233	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R909	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R911	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R912	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP
	4	R913	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4	R914	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R917	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R933	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R934	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R942	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R943	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R606	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R224	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R225	2001-000325 R-CARBON;120OHM,5%,1/8W,AA,TP,	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP	
△	RR005S	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP	
4	R218	2001-000411 R-CARBON;180KOHM,5%,1/8W,AA,TP,	
△	RR002S	2001-000411 R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R220	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R607	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R214	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP,	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
△	RR001S	2001-000660 R-CARBON;33KOHM,5%,1/8W,AA,TP,	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R708	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R927	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R203	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP,	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R212	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.39OHM,5%,1/2W,AA	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA,	
4	R303	2003-002238 R-METAL OXIDE(S);1.30HM,5%2W,AF,TP,3.9X10	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,	
4	R411	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA,	
4	R809	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R810	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R405	2001-001187 R-CARBON(S);75OHM,5%,1/2W,AA,T	
4	R831	2001-001045 R-CARBON(S);1.2KOHM,5%,1/2W,AB	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△	RP801S	2002-001010 R-COMPOSITION;1.8MOHM,5%,1/2W,AA,TP,3.7X	
△	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4	R402	2003-002178 R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4	R316	2003-000652 R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-000998 R-METALOXIDE;300OHM,5%,2W,AF,T	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R423	2004-001373 R-METAL,FILM;RM1/2T100K-F	
△	RR003S	2004-001379 R-METAL(S);12KOHM,1%,1/2W,AA,T	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,	

Loc. No.	Code No.	Description ; Specification	Remark
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
△	RR004S	2004-004048 R-METAL(S);3.9Kohm,1%,1/2W,AA,TP,2.5x6.5	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R304	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4	R305	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);1OHM,5%,2W,AF,TP,	
4	R608	2008-001086 R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
4	R609	2008-001086 R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4	R422	2008-001011 R-FUSIBLE(S);0.18OHM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.18OHM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C806A	2201-000108 C-CERAMIC,DISC;1.5NF,10%,1KV,Y	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
△	CR409S	2201-002028 C-CERAMIC,DISC;0.47nF,10%,2kV,Y5P,TP,7.5	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000589 C-CERAMIC,DISC;560PF,10%,500V,	
△	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;0.47nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(TJ)B2KV561-K	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C226	2202-000829 C-CERAMIC,MLC-AXIAL;820pF,10%,50V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C604	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C805	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C232	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPPF;47NF,5%,630V,TP,19	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5M	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PFF;100NF,5%,50V,TP	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTPAG250V10	
△	CR01S	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
△	CR02S	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	

Electrical Parts List

Loc. No.	Code No.	Description ; Specification	Remark
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C212	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	C901	2401-002144 C-AL;47uF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C206	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C820	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47uF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11,5,5	
4	C406	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-.3A,-,-.3.5x5,TP,-	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L802	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L803	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J127	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-.30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-.30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
△	L403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R850	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J822	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW01	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW03	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW05	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	O1VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1L,B,1.6T,245	
4	EY401	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY402	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY403	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY404	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY405	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY414	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY415	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY416	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY417	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY418	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY419	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY420	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY421	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY501	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY819	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY827	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY829	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY833	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY701	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EY702	AA60-40011A EYELET;-ID2.0,0D2.8,-,BST	
4	EL401	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL402	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL801	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL802	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	Z201	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,TP,-	

Loc. No.	Code No.	Description ; Specification	Remark
4	C915	2401-002009	C-AL;100UF,20%,16V,GP,TP,6.3X7
4	R505	2008-000264	R-FUSIBLE(S);10HM,5%,1W,AF,TP,
△ 4	CR403S	2306-000179	C-FILM,MPPF;300nF,5%,250V,TP,20x18.5x10.
4	C815	2401-000703	C-ELEC;CE04-40/8525VT222-MWSD
4	C603	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5
4	R811	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9
4	R812	2003-002239	R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9
△ 2	PWR/AC	AA96-20129A	ASSY-POWER,CORD;-;EP2/YES,H/C300,ME301P,
3		AA39-10007Y	POWER-CORD;-;EP2/YES,SPT-2 18AWGx2C,2.4m
3		AA61-20284A	HOLDER P CORD;PP,VO,BLK,KE-002

ASSY-COVER/REAR

1	A/REAR	AA90-03215A	ASSY-COVER/REAR;K15A(H),501F,G4309,AKAI
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+;B,M4,L15,ZPC(BLK),SWR
2	SPACER	AA63-60001U	SPACER-FELT;-;FELT,T0.5,-;150X15
2	B/C	AA64-02878A	CABINET-BACK;501F,HIPS,V0,BLK,K15A,SAM'S
2	AC+BC	AA65-30008A	CLAMP-CORD;-;PE,HB,BLK,-;-
2	H/T	AA61-00356B	HOLDER-TUNER,F/JACK;-;501F,ABS,HB,BLK,-
2	INL/CA	AA64-02053A	INLAY BACK;CAUTION,LGRY-TXT,W-FCC,73X93,

ASSY-COVER/FRONT

1	A/CFRN	AA90-03241A	ASSY-COVER/FRONT;K15A(H),19,501F,AKAI
2	SPK+CF	6003-001026	SCREW-TAPTITE;RH,+;B,M4,L15,ZPC(BLK),SWR
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR
2	STOPPE	AA61-40113A	STOPPER-PCB;-;ABS,HB,NTR.
2	F/C	AA64-02879A	CABINET-FRONT;501F,HIPS,V0,SV808P,K15A
2	KC+CF	6003-001026	SCREW-TAPTITE;RH,+;B,M4,L15,ZPC(BLK),SWR
3	BOSS	AA61-40010A	BOSS-CABINET;-;HIPS,HB,BLK,
3	SPRING	AA61-60003Q	SPRING-CS;-;SUS304,0.5,OD8,H10,N5,-;-
3	KP	AA64-10704F	KNOB POWER;501F,ABS,-;G3676,-;HB,-;-
3	KC	AA64-10705C	KNOB CONTROL;501F,ABS,-;-;HB,G3676,-;-
3	WR	AA64-40450B	WINDOW-REMOCON;-;501F,-;PC,V0,VIOLET,-
3	IL	AA64-40451B	INDICATOR-LED;-;33.501F,-;ACRYL,-;CLR,-
2	CWIRE2	AA65-30018A	CLAMP-WIRE;-;NYLON6.6,-;DATL
2	A/SPK	AA96-10141B	ASSY-SPEAKER;-;8OHM,3W,3001-001020,AA39-
3	SPK	3001-001020	SPEAKER;3W,8ohm,90dB,140Hz
3	L/SPK	AA39-20501C	LEAD CONNECTOR-ASSY;-;67096-003,REC,3(2)
2	CWRE1	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	L/IND	AA68-00524A	LABEL-INDICATOR;A/P 90(G),CXJ1352X/XAA,U
2	L/WARN	AA68-01618A	LABEL-WARNING;WHTPAPER100
2	BADGE	AA64-02287A	BADGE-BRAND;ALL,AL FORGING,-;-;L40,-;SIL

ASSY-BOX

1	A/BOX	AA92-05363A	ASSY-BOX;K15A(H),19,AKAI
2	L/BARC	AA68-01621A	LABEL-BARCORDER;EDP60POUNDSSMOOT
2	PCK	AA69-01749A	PACKING-CASE;CT501F,KRAFT-LINER
2	L/UPC	AA68-02454A	LABEL-BARCODE;55mmX75mm,SAM'S CLUB,CT199

ASSY-P/MATERIAL

1	A/PACK	AA92-05360A	ASSY-P/MATERIAL;K15A(H),19,501F,AKAI
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-;-;H18,33X17.8X2
2	PE-BAG	AA69-01208A	BAG;SHEET,19-20,W42,L50,FOAM,OEM
2	C/SET	AA69-20436A	CUSHION-SET;EPS FOAMED, C=0.02 CT-501F

ASSY LABEL

1	A/LABE	AA92-06330A	ASSY LABEL;K15D,19,AKAI
2	L/RAT	AA68-02694A	LABEL RATING;AKAI,UL1492,SAM'S,WHITE-PAP
2	L/SET	AA68-01568A	LABEL;SET,A48KRD82X,SAMS.23-28KV

Loc. No.	Code No.	Description ; Specification	Remark
ASSY CPT			
1	A/CPT	AA91-05583A	ASSY CPT;A48KRD82X(H),SEMI-TINT,+380MG
2	TAPE	0203-000432	TAPE-ACETATE;ACETATET0.25W19WH
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
△ 2	CRT	AA03-00246A	CRT-COLOR;A48KRD82X(H)+380MG,NONAFTA,MAL
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00200A	COIL DEGAUSSING;1.2MH,10%,30T,1.5OHM,20
2	D-Y	AA27-50004V	DEFL-YOKE;-;DSE-1992LL(1H),20'/A48KRD82X
2	CDCOIL	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A	SPACER-DY;-;NEOPRENE,-;BLK,VOW
2	A/TBC	AA98-70014B	ASSY-TBC,WIRE;20,NTSC,1P

ASSY ACCESSORY

1	A/ACCE	AA92-06321A	ASSY ACCESSORY;K15D,19,AKAI
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	C/WARR	AA68-00590A	CARD-WARRANTY;CT1990,SMS,W/P100(G),ENG,W
2	C/WARR	AA68-40045A	CARD-WARRANTY;CT1990,SMS,W/P100(G),SPA,W
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151
2	RMT	AA59-00021M	REMOCON;SAM'S CLUB,TELEFUNKEN,L/GRAY,
2	C/WARR	AA68-02442A	CARD-WARRANTY;1PAGE,SPA,K15A(GIGANTE)
2	I/B1	AA68-02495A	MANUAL-USERS;SMS,ENG,K15D,W/P100
2	I/B2	AA68-02496A	MANUAL-USERS;SMS,SPA,K15D,W/P100

7-4 CT2088BWX/GSU

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05608A	ASSY CHASSIS;K15D,20,STEREO,LATIN,CT208
2	CLW/HS	AA65-30018A	CLAMP-WIRE;-;NYLON6.6,-,DATL
2	FBT	AA65-30018A	CLAMP-WIRE;-;NYLON6.6,-,DATL
2	A/MAIN	AA96-01063A	aSSY PCB P-MAIN;K15D,20,STEREO,LATIN,CT
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,T0-3PF,ST,8
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP8
△	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T
△	CR401S	2303-001015	C-FILM,PPFF;5.5NF,5%,1.6KV,TP,
△	CR403S	2306-000179	C-FILM,MPFF;300nF,5%,250V,TP,20x18.5x10.
3	C801	2401-002219	C-AL;220UF,20%,400V,-,25X40,10MM,ST
△	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT,V;KPT1122R1KEYSTT=0.3M
△	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,Ni,-
3	CN604	3711-000963	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	CN701	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.
3	JA701	3722-001453	JACK-RCA;3P,3.4mm,Ni,BLK,-
△	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/AI,SPM-458AN1,64P,
△	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△	T444S	AA26-00065A	TRANS FBT;-;FSV-14A004C(S),14-22,125V
△	T401	AA26-50001B	ORIZ.DRIVE;-;7.1MH,102UH,10-2
△	LR401S	AA27-00053A	COIL-LINEARLITY;-;193uH,DR10X10 C:4.35,7
△	LX801S	AA29-30001D	FILTER-LINE;-;6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m
△	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△	D806	AA96-00243D	ASSY H/S;-;BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIERSDS60U20S,200V,6A,T0-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-;T1.0,-,DREAM,-,-,-,-,
3	IC301	AA96-00244A	ASSY H/S;-;AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
3	IC601	AA96-00244B	ASSY H/S;-;AA62-00046A,TDA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-,DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
△	IC802	AA96-00245A	ASSY H/S;-;AA62-00055A,KA7632,-
4		1203-001939	IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-;T1.0,-,35*15*25,D1,-,-,
3	LD901	AA96-00555A	ASSY LED GUIDE;-;UEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY H/S;-;VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-;SECC,T1.0,-,33X15X30FT-2
△	IC801S	AA96-00816A	ASSY H/S;-;POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,T0-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050,T2.0,W54.0,H40.
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3		0202-000187	SOLDER-WIREFLUX;-;RS60S,D1.2.6
3	ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6
3	L/PQS	AA68-01018A	LABEL-PQS;-;50mmX,13,-,WHITE,-
△	P803S	1404-001265	THERMISTOR-PTC;4.50HM/1000HM,+30/-20%,22
3	GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY;YFH800-01,S,1P,300,
3	A/AUTO	AA97-13334A	ASSY AUTO;K15D,20,STEREO,LATIN,CT2088W
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2

Loc. No.	Code No.	Description ; Specification	Remark	
△	4	D804	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
	4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△	4	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
	4	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41
	4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
	4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
	4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ803	0403-001039	DIODE ZENER;MA2560,56V,52-60V,1W,DO-41,T
	4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
	4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
	4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
	4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
	4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO
	4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D
	4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
	4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
	4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
	4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
	4	R207	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
	4	R905	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
	4	R906	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
	4	RS603	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1
	4	R206	2001-000010	R-CARBON;68kOhm,5%,1/8W,AA,TP,1.8x3.2mm
	4	RS602	2001-000010	R-CARBON;68kOhm,5%,1/8W,AA,TP,1.8x3.2mm
	4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
	4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4m
	4	R409	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,T
	4	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,
	4	R808	2001-001138	R-CARBON(S);390OHM,5%,1/2W,AA,
	4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R211	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R233	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R501	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R502	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R506	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R510	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R511	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,
	4	R512	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,

Loc. No.	Code No.	Description ; Specification	Remark
4	R909	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R911	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R912	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R913	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R914	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R917	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R933	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R934	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R942	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R943	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS609	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R224	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	RS610	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R225	2001-000325 R-CARBON;1200HM,5%,1/8W,AA,TP,	
4	RS604	2004-005053 R-METAL;16.6KOHM,1%,18W,AA,TP,1.8X3.2MM	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4	R218	2001-000411 R-CARBON;1KOHM,5%,1/8W,AA,TP,	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS601	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS606	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS607	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R214	2001-000490 R-CARBON;2000HM,5%,1/8W,AA,TP,	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP,	
4	R220	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP,	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP,	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R927	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
4	RS605	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP,	
4	R203	2001-000857 R-CARBON;5600HM,5%,1/8W,AA,TP,	
4	R288	2001-000908 R-CARBON;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R289	2001-000908 R-CARBON;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R212	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.390HM,5%,1/2W,AA,	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA,	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,	
4	R411	2001-001114 R-CARBON(S);2700HM,5%,1/2W,AA,	
4	R405	2001-001187 R-CARBON(S);750HM,5%,1/2W,AA,T	
4	R809	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA,	
4	R810	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA,	
4	R831	2001-001045 R-CARBON(S);1.2KOHM,5%,1/2W,AB	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4	R402	2003-002178 R-METAL OXIDE(S);1Kohm,5%,2W,AG,TP,3.9X1	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-000998 R-METALOXIDE;3000HM,5%,2W,AF,T	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	

Loc. No.	Code No.	Description ; Specification	Remark
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R316	2003-000652 R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R423	2004-001373 R-METAL FILM;RM1/2T100K-F	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4	R304	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R305	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R608	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R609	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4	R422	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
4	CS621	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS624	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS626	2201-000379 C-CERAMIC,DISC;22NF,+80-20%,50	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,	
△	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
4	C814	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
△	CR409S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C226	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C805	2301-000235 C-FILM,PEF;3.9NF,5%,50V,6.5X3.0X5.5MM,5M	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	CS606	2301-000356 C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPEF;47NF,55,630V,TP,19	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2KV,TP,15x8x12.5mm	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5M	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS602	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS608	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP,	
4	CS609	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	CS620	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	

Electrical Parts List

Loc. No.	Code No.	Description ; Specification	Remark
4	CS623	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CS629	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS603	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS611	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS613	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS614	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS616	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS617	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C820	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C815	2401-000703 C-ELEC;CE04-40/8525VT222-MWSD	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS601	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS610	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	CS607	2401-001334 C-ALUMINUM;470NF,20%,50V,GP,5*11MM,2MM,T	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	CS604	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS615	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS618	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS619	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	C901	2401-002144 C-AL;47UF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	CS612	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47UF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220UF,20%,16V,GP,TP,8x11,5,5	
4	C406	2401-002619 C-AL;47UF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	

Loc. No.	Code No.	Description ; Specification	Remark
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R850	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J133	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J822	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J126	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
△	L403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J127	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	01VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1LB,1.6T,245	
4	EY401	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY402	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY403	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY404	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	

Loc. No.	Code No.	Description ; Specification	Remark
4	EY405	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY414	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY415	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY416	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY417	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY418	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY419	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY420	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY421	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY501	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY819	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY827	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY829	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY833	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY701	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY702	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL801	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL802	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT101	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	Z201	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-	
4	C915	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
4	R505	2008-000264 R-FUSIBLE(S);10HM,5%,1W,AF,TP	
4	L803	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	L802	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	CS631	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C603	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	R607	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	RS613	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	C604	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	CS632	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	C232	2201-000262 C-CERAMIC,DISC;180PF,10%,50V,Y	
4	R811	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
4	R812	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
4	R303	2003-002238 R-METAL OXIDE(S);1.3OHM,5%2W,AF,TP,3.9X10	
4	RS612	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	RS614	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	ICS602	1203-001225 IC-POS,SL,FIXEDREG.;78R09,T0-220,4P,-,PLA	
△	PWR/AC	AA96-20109C ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	
3		AA39-10006X POWER-CORD;-,KKP419C,KLCE-2F,2.286MT	
3		AA61-20284A HOLDER P CORD;PP,VO,BLK,KE-002	

ASSY COVER FRONT

1	A/CFRN	AA90-04440A	ASSY COVER FRONT;K15D,20S4,HB,SV704P,HIP
2	H+CT+C	0201-000279	HOT-MELT;HMS-100
2	SPK+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	PA+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSY;WG,HH,+,M5,L31.5,SWR
2	STOPPE	AA61-40113A	STOPPER-PCB;-,ABS,HB,NTR.
2	GRILLE	AA63-00270A	GRILLE-WOOFER,L;DP,20S4,63-00204B 11.5kg
2	GRILLE	AA63-00271A	GRILLE-WOOFER,R;DP,20S4,63-00205B 11.5kg
2	C/F	AA64-00700F	CABINET FRONT;20S4,SV704P B-VISION,HIPS
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SPRING	AA61-60003J	SPRING-CS;-,SUS304,0.5,0D6,H
3	CC	AA63-00202C	COVER-CONTROL;-,20S4,GD906P EPG NT,HIPS
3	C/TOP	AA63-00226B	COVER-TOP;LATIN;-,20S4,T/SOUND,ABS,LG TR
3	KC	AA64-00702B	KNOB CONTROL;-,20S4,-,ABS,HB,G3676
3	KP	AA64-00703D	KNOB POWER;-,20S4,T/S NO-SILK,ABS,HB,G36
3	WR	AA64-00704B	WINDOW REMOCON;-,20S4,-,PC,VO,VIOLET,-
3	IL	AA64-00705B	INDICATOR LED;-,20S4,-,ACRYL,-,CLR,-

Loc. No.	Code No.	Description ; Specification	Remark
3	SPACER	AA60-00048A	SPACER-FELT;FELT,T0.5,BLK,10X185,52,-
2	BADGE	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG
2	CWFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	A/SPK	AA96-00287A	ASSY SPEAKER;-,8ohm,15W,001115/001088,AA
3	SPK	3001-001088	SPEAKER;5W,8ohm,90dB,250Hz+-50Hz
3	SPK	3001-001115	SPEAKER;15W,80HM,93DB+-2DB,110
3	L/SPK	AA39-00091A	LEAD-CONNECTOR;ASSY;4P/4.7uF,5264-04,REC
2	A-A/V	AA96-01249A	ASSY PCB P-A/V FRONT;15/19/20,K15D
3	JE601	3722-000143	JACK-PHONE;1P;3.4MM,-,MBAG
3	JR01	3722-001031	JACK-RCA;3P;3.6MM,#18,AU
3	RE01	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,
3	RE02	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,
3	CE01	2401-000480	C-AL;10UF,20%,50V,GP;5X11MM,5M
3	CE02	2401-000480	C-AL;10UF,20%,50V,GP;5X11MM,5M
3	O1VER	AA41-00227B	PCB-A/V;CT-20S4,FR-1,1L,B,1.6T,245X245
3	CN705A	AA39-20071F	LEAD CONNECTOR-ASSY;YBNH250-12,12P,200MM

ASSY COVER REAR

1	A/REAR	AA90-04257A	ASSY COVER REAR;K15D,20S4,HIPS,HB,G4309
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA63-60001X	SPACER-FELT;FELT,T0.5,330X15MM
2	B/C	AA64-00701F	CABINET BACK;20S4,HIPS,HB,G4309
2	AC+BC	AA65-30008A	CLAMP-CORD;-,PE,HB,BLK,-,-

ASSY BOX

1	A/BOX	AA92-01972A	ASSY BOX;CT2088BW6X/GSU
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-00320F	PACKING-CASE;20S4,D-2 BB,-,-,-,-,YEL,-

ASSY LABEL

1	A/LABE	AA92-02250A	ASSY LABEL;CT2088BW6X/GSU
2	INLAB	AA64-60385G	INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN

ASSY P/MATERIAL

1	A/PACK	AA92-02527A	ASSY P/MATERIAL;CT2088BW6X/GSU
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,H18,33X17.8X2
2	C/SET	AA69-00310B	CUSHION SET;20S4,PS C=0.02,-,-,-,-
2	PE-BAG	AA69-01208A	BAG;SHEET,19-20,W42,L50,FOAM,OEM

ASSY CPT

1	A/CPT	AA91-05814A	ASSY CPT;A48KRD82X(H),SEMI-TINT,0MG
2	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
△	CRT	AA03-10029X	CRT-COLOR;A48KRD82X(H),0MG,SEMI-TINT.
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00254A	COIL DEGAUSSING;20INCH,10%,70TS,4.50HM,
2	D-Y	AA27-50004W	DEFL-YOKE;-,DSE-1992L(1H),20'/A48KRD82X
2	CDCOIL	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A	SPACER-DY;-,NEOPRENE,-,BLK,V0W
2	A/TBC	AA98-70014B	ASSY-TBC,WIRE;20,NTSC,1P
2	CRT+DC	0203-001160	TAPE FILAMENT SCOTCH#8915,T0.16,W24,L0.1

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY ACCESSORY

1	A/ACCE	AA92-07019A	ASSY ACCESSORY;K15D,20,GSU
2	AC/TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA
2	T/MATC	AA26-90001F	TRANS-MATCHING;-;3000HM/750HM,NTSC,40-89
2	A/ROD	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN
2	RMT	AA59-00108C	REMOCON;DP,TM59,AA59-00077C,21,STR
2	I/B1	AA68-02660A	MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151

7-5 CT2088BWX/STR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05608A	ASSY CHASSIS;K15D,20,STEREO,LATIN,CT208
2	CLW/HS	AA65-30018A	CLAMP-WIRE;-;NYLON6.6;-;DNL
2	FBT	AA65-30018A	CLAMP-WIRE;-;NYLON6.6;-;DNL
2	A/MAIN	AA96-01063A	aSSY PCB P-MAIN;K15D,20,STEREO,LATIN,CT
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,TO-3PF,ST,8
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP,8
△	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T
△	CR401S	2303-001015	C-FILM,PPF;5.5NF,5%,1.6KV,TP
△	CR403S	2306-000179	C-FILM,MPPF;300nF,5%,250V,TP,20x18.5x10.
3	CR801	2401-002219	C-AL;220UF,20%,400V,-,25X40,10MM,ST
△	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT,Y;KPT1122R1KEYSTT=0.3M
△	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NL,-
3	CN604	3711-000963	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	CN701	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.
3	JA701	3722-001453	JACK-RCA;3P3,4mm,NL,BLK,-
△	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/Al,SPM-458AN1,64P,
△	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△	T445	AA26-00065A	TRANS FBT;-;FSV-14A004C(S),14-22,125V
△	T401	AA26-50001B	ORIZ.DRIVE;-;7.1MH,102UH,10-2
△	LR401S	AA27-00053A	COIL-LINEARLITY;-;193uH,DR10X10 C:4.35,7
△	LX801S	AA29-30001D	FILTER-LINE;-;6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m
△	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△	D806	AA96-00243D	ASSY H/S;-;BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIER;SDS60U20S,200V,6A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-;T1.0,-,DREAM,-,-,-,-
3	IC301	AA96-00244A	ASSY H/S;-;AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSOR;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
3	IC601	AA96-00244B	ASSY H/S;-;AA62-00046A,TDA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-,DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
△	IC802	AA96-00245A	ASSY H/S;-;AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-;T1.0,-,35*15*25,D1,-,-
3	LD901	AA96-00555A	ASSY LED GUIDE;-;UJEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY H/S;-;VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	IC-VIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-;SECC,T1.0,-,33X15X30FT-2
△	IC801S	AA96-00816A	ASSY H/S;POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050,T2.0,W54.0,H40.
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3		0202-000187	SOLDER-WIREFLUX;-;RS60S,D1,2,6
3	ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6
3	L/PQS	AA68-01018A	LABEL-PQS;-;50mmX,13,-,WHITE,-
3	P803S	1404-001265	THERMISTOR-PTC;4.5OHM/1000HM,+30/-20%,22
3	GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY;YFH800-01,S,1P,300,
3	A/AUTO	AA97-13334A	ASSY AUTO;K15D,20,STEREO,LATIN,CT2088W
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

	4	D804	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
	4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△	4	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
	4	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41
	4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
	4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
	4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
	4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ803	0403-001039	DIODE ZENER;MAZ560,56V,52-60V,1W,DO-41,T
	4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
	4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
	4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
	4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
	4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,D
	4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V,5.07V,500mW,D
	4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
	4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
	4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
	4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
	4	R207	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	R905	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	R906	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	RS603	2001-000007	R-CARBON;3K0HM,5%,1/8W,AA,TP,1
	4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	4	RS602	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
	4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4m
	4	R409	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,T
	4	R823	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,
	4	R808	2001-001138	R-CARBON(S);3900HM,5%,1/2W,AA,
	4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R233	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R501	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R502	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R506	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R510	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R511	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R512	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4	R909	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R911	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R912	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R913	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R914	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R917	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R933	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R934	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R942	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R943	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS609	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R224	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	RS610	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R225	2001-000325 R-CARBON;1200HM,5%,1/8W,AA,TP,	
4	RS604	2004-005053 R-METAL;16.6KOHM,1%,18W,AA,TP,1.8X3.2MM	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4	R218	2001-000411 R-CARBON;1KOHM,5%,1/8W,AA,TP,	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS601	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS606	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS607	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R214	2001-000490 R-CARBON;2000HM,5%,1/8W,AA,TP,	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP,	
4	R220	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP,	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP,	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R927	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
4	RS605	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP,	
4	R203	2001-000857 R-CARBON;5600HM,5%,1/8W,AA,TP,	
4	R288	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R289	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R212	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.390HM,5%,1/2W,AA	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA,	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,	
4	R411	2001-001114 R-CARBON(S);2700HM,5%,1/2W,AA,	
4	R405	2001-001187 R-CARBON(S);750HM,5%,1/2W,AA, T	
4	R809	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R810	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R831	2001-001045 R-CARBON(S);1.2KOHM,5%,1/2W,AB	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4	R402	2003-002178 R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-000998 R-METALOXIDE;3000HM,5%,2W,AF,T	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	

Loc. No.	Code No.	Description ; Specification	Remark
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R316	2003-000652 R-METAL OXIDE(S);330ohm,5%,2W,AF,TP,4x12	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R423	2004-001373 R-METAL FILM;RM1/2T100K-F	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4	R304	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R305	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R608	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R609	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4	R422	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
4	CS621	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS624	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS626	2201-000379 C-CERAMIC,DISC;22NF,+80-20%,50	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,	
△	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
4	C814	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
△	CR409S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C226	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C805	2301-000235 C-FILM,PEF;3.9NF,5%,50V,6.5X3.0X5.5MM,5M	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	CS606	2301-000356 C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPEF;47NF,55,630V,TP,19	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2KV,TP;15x8x12.5mm	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5M	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS602	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS608	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP,	
4	CS609	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	
4	CS620	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	

Loc. No.	Code No.	Description ; Specification	Remark
4	CS623	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CS629	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS603	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS611	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS613	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS614	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS616	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS617	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C820	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C815	2401-000703 C-ELEC;CE04-40/8525VT222-MWSD	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	CS601	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	CS610	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	CS607	2401-001334 C-ALUMINUM;470NF,20%,50V,GP,5*11MM,2MM,T	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	CS604	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	CS615	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	CS618	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	CS619	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C901	2401-002144 C-AL;47uF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	CS612	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47uF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11,5,5	
4	C406	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	

Loc. No.	Code No.	Description ; Specification	Remark
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R850	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J133	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J822	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J126	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
△	L403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J127	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	01VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1LB,1.6T,245	
4	EY401	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY402	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY403	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	
4	EY404	AA60-40011A EYELET;-ID2.0,OD2.8,-,BST	

Loc. No.	Code No.	Description ; Specification	Remark
4	EY405	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY414	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY415	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY416	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY417	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY418	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY419	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY420	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY421	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY501	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY819	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY827	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY829	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY833	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY701	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY702	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL801	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL802	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT101	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	Z201	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-	
4	C915	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
4	R505	2008-000264 R-FUSIBLE(S);10HM,5%,1W,AF,TP	
4	L803	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	L802	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	CS631	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C603	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	R607	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	RS613	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	C604	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	CS632	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	C232	2201-000262 C-CERAMIC,DISC;180PF,10%,50V,Y	
4	R811	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
4	R812	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP,3.9	
4	R303	2003-002238 R-METAL OXIDE(S);1.3OHM,5%2W,AF,TP,3.9X10	
4	RS612	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	RS614	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	ICS602	1203-001225 IC-POSIX.FIXEDREG.;78R09,T0-220,4P,-,PLA	
△	PWR/AC	AA96-20109C ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	
3		AA39-10006X POWER-CORD;-,KKP419C,KLCE-2F,2.286MT	
3		AA61-20284A HOLDER P CORD;PP,VO,BLK,KE-002	

ASSY COVER FRONT

1	A/CFRN	AA90-04440A	ASSY COVER FRONT;K15D,20S4,HB,SV704P,HIP
2	H+CT+C	0201-000279	HOT-MELT;HMS-100
2	SPK+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	PA+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR
2	STOPPE	AA61-40113A	STOPPER-PCB;-,ABS,HB,NTR.
2	GRILLE	AA63-00270A	GRILLE-WOOFER,L;DP,20S4,63-00204B 11.5kg
2	GRILLE	AA63-00271A	GRILLE-WOOFER,R;DP,20S4,63-00205B 11.5kg
2	C/F	AA64-00700F	CABINET FRONT;20S4,SV704P B-VISION,HIPS,
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,0D6,H
3	CC	AA63-00202C	COVER-CONTROL;-,-,20S4,GD906P EPG NT,HIPS,
3	C/TOP	AA63-00226B	COVER-TOP;LATIN;-,-,20S4,T/SOUND,ABS,LG TR
3	KC	AA64-00702B	KNOB CONTROL;-,-,20S4,-,ABS,HB,G3676
3	KP	AA64-00703D	KNOB POWER;-,-,20S4,T/S NO-SILK,ABS,HB,G36
3	WR	AA64-00704B	WINDOW REMOCON;-,-,20S4,-,PC,VO,VIOLET,-
3	IL	AA64-00705B	INDICATOR LED;-,-,20S4,-,ACRYL,-,CLR,-

Loc. No.	Code No.	Description ; Specification	Remark
3	SPACER	AA60-00048A	SPACER-FELT;FELT,T0.5,BLK,10X185,52,-
2	BADGE	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG
2	CWFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	A/SPK	AA96-00287A	ASSY SPEAKER;-,-,8ohm,15W,001115/001088,AA
3	SPK	3001-001088	SPEAKER;5W,8ohm,90dB,250Hz+-50Hz
3	SPK	3001-001115	SPEAKER;15W,80HM,93DB+-2DB,110
3	L/SPK	AA39-00091A	LEAD-CONNECTOR;ASSY;4P/4.7uF,5264-04,REC
2	A-A/V	AA96-01249A	ASSY PCB P-A/V FRONT;15/19/20,K15D
3	JE601	3722-000143	JACK-PHONE;1P;3.4MM,-,MBAG
3	JR01	3722-001031	JACK-RCA;3P;3.6MM,#18,AU
3	RE01	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,
3	RE02	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,
3	CE01	2401-000480	C-AL;10UF,20%,50V,GP;5X11MM,5M
3	CE02	2401-000480	C-AL;10UF,20%,50V,GP;5X11MM,5M
3	O1VER	AA41-00227B	PCB-A/V;CT-20S4,FR-1,1L,B,1.6T,245X245
3	CN705A	AA39-20071F	LEAD CONNECTOR-ASSY;YBNH250-12,12P,200MM

ASSY COVER REAR

1	A/REAR	AA90-04257A	ASSY COVER REAR;K15D,20S4,HIPS,HB,G4309
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA63-60001X	SPACER-FELT;FELT,T0.5,330X15MM
2	B/C	AA64-00701F	CABINET BACK;20S4,HIPS,HB,G4309
2	AC+BC	AA65-30008A	CLAMP-CORD;-,-,PE,HB,BLK,-,-

ASSY BOX

1	A/BOX	AA92-01972A	ASSY BOX;CT2088BW6X/GSU
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-00320F	PACKING-CASE;20S4,D-2 BB,-,-,-,-,YEL,-

ASSY LABEL

1	A/LABE	AA92-02250A	ASSY LABEL;CT2088BW6X/GSU
2	INLAB	AA64-60385G	INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN

ASSY P/MATERIAL

1	A/PACK	AA92-02527A	ASSY P/MATERIAL;CT2088BW6X/GSU
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,-,H18,33X17.8X2
2	C/SET	AA69-00310B	CUSHION SET;20S4,PS C=0.02,-,-,-,-
2	PE-BAG	AA69-01208A	BAG;SHEET,19-20,W42,L50,FOAM,OEM

ASSY CPT

1	A/CPT	AA91-05814A	ASSY CPT;A48KRD82X(H),SEMI-TINT,0MG
2	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
△	CRT	AA03-10029X	CRT-COLOR;A48KRD82X(H),0MG,SEMI-TINT.
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00254A	COIL DEGAUSSING;20INCH,10%,70TS,4.5OHM,
2	D-Y	AA27-50004W	DEFL-YOKE;-,-,DSE-1992L(1H),20'/A48KRD82X
2	CDCOIL	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A	SPACER-DY;-,-,NEOPRENE,-,BLK,V0W
2	A/TBC	AA98-70014B	ASSY-TBC,WIRE;20,NTSC,1P
2	CRT+DC	0203-001160	TAPE FILAMENT SCOTCH#8915,T0.16,W24,L0.1

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY ACCESSORY

1	A/ACCE	AA92-07078A	ASSY ACCESSORY;K15D,20,STR
2	AC/TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	T/MATC	AA26-90001F	TRANS-MATCHING;-;300OHM/75OHM,NTSC,40-89
2	A/ROD	AA42-00005A	ANT ROD;:,1000MM,5SECTIONS
2	RMT	AA59-00108C	REMOCON;DP;TM59,AA59-00077C,21,STR
2	BATT	4301-000120	BATTERY-MN;1.5V;-;AA
2	W/CARD	AA68-40004B	CARD-WARRANTY;W/P100(G),WHITE/BUE,PERU
2	I/B1	AA68-02660A	MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN
2	I/B2	AA68-02659A	MANUAL USERS;ENG,W/P100(G),B5,K15D,LATIN
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151

7-6 CT2188BWFX/XAX

Loc. No.	Code No.	Description ; Specification	Remark
ASSY CHASSIS			
1	A/CHAS	AA91-05587A	ASSY CHASSIS;K15D,21,SEM,STEREO
2	A/MAIN	AA94-08282E	ASSY PCB MAIN;CT2188W6X/XAX,K15D,SAMEX
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,T0-3PF,ST,8
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP,8
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M/T
△ 3	CR401S	2303-001015	C-FILM,PPFF;5.5NF,5%,1.6KV,TP
△ 3	CR403S	2306-000004	C-FILM,MPPF;330NF,5%,250V,TP,2
3	C801	2401-002219	C-AL;220UF,20%,400V,-,25X40,10MM,ST
△ 3	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT,V;KPT1122R1KEYSTT=0.3M
△ 3	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-
3	CN604	3711-002643	POST-HEADER;YV025-04(AUTO)
3	CN701	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.
3	JA701	3722-001453	JACK-RCA;3P,3.4mm,NI,BLK,-
△ 3	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/AI,SPM-458AN1,64P,
△ 3	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△ 3	T444S	AA26-00065A	TRANS FBT,-,FSV-14A004C(S),14-22,125V
△ 3	T401	AA26-50001B	ORIZ.DRIVE,-,7.1MH,102UH,10-2
△ 3	LR401S	AA27-00053A	COIL-LINEARLITY,-,193uH,DR10X10 C,4.35,7
△ 3	LX801S	AA29-30001D	FILTER-LINE,-,6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△ 3	D806	AA96-00243D	ASSY H/S,-,BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIER;SDS60U20S,200V,6A,T0-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,D1(DREAM),60X25X
3	IC301	AA96-00244A	ASSY H/S,-,AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS,-,T1.0,-,D1(DREAM),60X25X
3	IC601	AA96-00244B	ASSY H/S,-,AA62-00046A,TA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-,DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS,-,T1.0,-,D1(DREAM),60X25X
△ 3	IC802	AA96-00245A	ASSY H/S,-,AA62-00055A,KA7632,-
4		1203-001939	IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS,-,T1.0,-,35*15*25,D1,-,,-
3	LD901	AA96-00555A	ASSY LED GUIDE,-,UEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY-H/S,-,VIDEO,AA62-30175D,TA6A107Q,-
4		1201-001159	ICVIDEOAMP;TA6A107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS,-,SECC,T1.0,-,33X15X30FT-2
△ 3	IC801S	AA96-00816A	ASSY H/S,-,POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,T0-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050 ,T2.0,W54.0,H40.
3	A/AUTO	AA97-07230F	ASSY AUTO-MAIN;K15D,SAMEX
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D808	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D902	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41
4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,

Loc. No.	Code No.	Description ; Specification	Remark
4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△ 4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△ 4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△ 4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△ 4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△ 4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△ 4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ803	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ804	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO
4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO
4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D
4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
4	Q951	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
4	Q802	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,T0-92,100
4	R207	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
4	R905	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
4	R906	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
4	RS603	2001-000007	R-CARBON;3K0HM,5%,1/8W,AA,TP,1
4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	RS602	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm
4	R409	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,T
4	R823	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,
4	R808	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,
4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
4	R211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R233	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R501	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R502	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R506	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R510	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R511	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R512	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R911	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R912	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
4	R913	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4	R914	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R917	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R933	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R934	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R942	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R943	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS609	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R224	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R807	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R833	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R842	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	RS610	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R225	2001-000325 R-CARBON;1200HM,5%,1/8W,AA,TP,	
4	RS604	2004-005053 R-METAL;16.6KOHM,1%,18W,AA,TP,1.8X3.2MM	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP,	
4	R218	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP,	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS601	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS606	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS607	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP,	
4	R214	2001-000490 R-CARBON;2000HM,5%,1/8W,AA,TP,	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP,	
4	R220	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP,	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP,	
4	R830	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP,	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R927	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
4	RS605	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP,	
4	R203	2001-000857 R-CARBON;5600HM,5%,1/8W,AA,TP,	
4	R288	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R289	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP,	
4	R212	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.390HM,5%,1/2W,AA	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA,	
4	R832	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R819	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R820	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,	
4	R411	2001-001114 R-CARBON(S);2700HM,5%,1/2W,AA,	
4	R405	2001-001116 R-CARBON(S);270HM,5%,1/2W,AA,T	
4	R821	2001-001125 R-CARBON(S);300KOHM,5%,1/2W,AA	
4	R818	2001-001154 R-CARBON(S);5.1KOHM,5%,1/2W,AB	
4	R805	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	
4	R850	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	
4	R831	2001-001197 R-CARBON(S);9100HM,5%,1/2W,AB,TP,2.4X6.4	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△ 4	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	

Loc. No.	Code No.	Description ; Specification	Remark
4	R402	2003-002178 R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12MM	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-001023 R-METALOXIDE(S);1200HM,5%,2W,A	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R834A	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R315	2003-002009 R-METALOXIDE(S);3900HM,5%,2W,A	
4	R316	2003-002009 R-METALOXIDE(S);3900HM,5%,2W,A	
4	R803	2003-002102 R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm	
4	R804	2003-002102 R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R423	2004-001373 R-METAL,FILM;RM1/2T100K-F	
4	R817	2004-001377 R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4	R822	2004-001983 R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
4	R304	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R305	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R303	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R608	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R609	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4	R422	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
4	CS621	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS624	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	C816	2201-000375 C-CERAMIC,DISC;220PF,5%,50V,RH	
4	CS626	2201-000379 C-CERAMIC,DISC;22NF,+80-20%,50	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,	
△ 4	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
4	C814	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
△ 4	CR409S	2201-002028 C-CERAMIC,DISC;0.47nF,10%,2KV,Y5P,TP,7.5	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C226	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C805	2301-000235 C-FILM,PEF;3.9NF,5%,50V,6.5X3.0X5.5MM,5M	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	CS606	2301-000356 C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2KV,TP,15x8x12.5mm	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5MM	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△ 4	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	

Loc. No.	Code No.	Description ; Specification	Remark
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS602	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS608	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP,	
4	CS609	2401-000480 C-AL;100UF,20%,50V,GP,5X11MM,5M	
4	CS620	2401-000480 C-AL;100UF,20%,50V,GP,5X11MM,5M	
4	CS623	2401-000480 C-AL;100UF,20%,50V,GP,5X11MM,5M	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CS629	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS603	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS611	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS613	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS614	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS616	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS617	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C820	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C815	2401-000703 C-ELEC;CE04-40/8525VT222-MWSD	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS601	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS610	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	CS607	2401-001334 C-ALUMINUM;470NF,20%,50V,GP,5*11MM,2MM,T	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100uf,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uf,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uf,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uf,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uf,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	CS604	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	CS615	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	CS618	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	CS619	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C901	2401-002144 C-AL;47uf,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;100UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;100UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;100UF,20%,16V,GP,TP,5X11,2.5	
4	CS612	2401-000050 C-AL;100UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47uf,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220uf,20%,16V,GP,TP,8x11.5,5	
4	C406	2401-002619 C-AL;47uf,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	

Loc. No.	Code No.	Description ; Specification	Remark
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-;3A,-,-3.5x5,TP,-	
△	L403	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,-30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,-30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J806	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J118	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4 J133	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 J601	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 J402	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 J823	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 J126	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 J127	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4 01VER	AA41-00625B	PCB-MAIN;TXM1967X/XAA,FR-1,1L,B,1.6T,245	
4 EY401	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY402	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY403	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY404	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY405	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY414	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY415	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY416	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY417	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY418	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY419	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY420	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY421	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY501	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY819	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY827	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY829	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY833	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY701	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EY702	AA60-40011A	EYELET;-,ID2.0,DD2.8,-,-,BST	
4 EL401	AA60-40011B	EYELET;-,ID2.2,DD3.2,-,-,BSP	
4 EL402	AA60-40011B	EYELET;-,ID2.2,DD3.2,-,-,BSP	
4 EL801	AA60-40011B	EYELET;-,ID2.2,DD3.2,-,-,BSP	
4 EL802	AA60-40011B	EYELET;-,ID2.2,DD3.2,-,-,BSP	
4 GT501	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT801	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT802	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT803	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT804	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT805	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT101	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT806	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT301	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT302	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT401	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 GT402	AA60-40014A	PIN-GT,ASSY;1P,-,-,AUTO	
4 R816	2001-000117	R-CARBON(S);680hm,5%,1/2W,AA,TP,2.4x6.4mm	
4 Z201	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,TP,-	
4 IC803	1203-001217	IC-POST,ADJUSTREG;431,TO-92,3P,4.58MIL,P	
4 C915	2401-002009	C-AL;100UF,20%,16V,GP,TP,6.3X7	
4 R505	2008-000264	R-FUSIBLE(S);10HM,5%,1W,AF,TP	
4 L803	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4 L802	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4 C810	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM	
4 CS631	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
4 C603	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	
4 R607	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP	
4 RS613	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP	
4 L/LINE	AA68-01544A	LABEL;LINE,ALL MDL COMMON	
4 C604	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4 CS632	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4 C232	2201-000262	C-CERAMIC,DISC;180PF,10%,50V,Y	
4 RS612	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4 RS614	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
△ 3 PWR/AC	AA96-20112A	ASSY-POWER,CORD;EP2/NP,H/C300	
4	AA39-10006K	POWER-CORD;KJ-10W,AWG SPT-2	
4	AA61-20284A	HOLDER P CORD;PP,VO,BLK,KE-002	
3	0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000	
3	0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37	
3	0204-001024	FLUX;DF-96TVS,-,20%,-	
3	0202-000187	SOLDER-WIREFLUX;-RS60S,D1,2,6	
△ 3 PT801S	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V	
△ 3 RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO	
3 ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6	
3 L/PQS	AA68-01018A	LABEL-PQS,-,50mmX,13,-,WHITE,-	
3 ICS602	1203-001225	IC-POS.FIXEDREG;78R09,TO-220,4P,-,PLA	
3 GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY;YFH800-01,S,1P,300,	
2 CLW/HS	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL	
2 FBT	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL	

Loc. No.	Code No.	Description ; Specification	Remark
ASSY COVER FRONT			
1 A/CFRN	AA90-04442A	ASSY COVER FRONT;K15D,21S6,G4309,HIPS,HB	
2 SPK+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR	
2 PA+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+M4,L12,ZPC(YEL)	
2 CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR	
2 S/GUM	AA63-60004K	SPACER-GUM,CRT,NTR RUBBER,T2,BLK,NEW,-,-	
2 F/C	AA64-00908C	CABINET-FRONT;21S6,HIPS,HB,G4309,SV704P	
3 KC+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR	
3 SPRING	AA61-60003J	SPRING-CS,-,-,SUS304,0.5,OD6,H	
3 CC	AA63-00206D	COVER-CONTROL;-21S4,GD906P EPG NT,HIPS,	
3 KC	AA64-00709B	KNOB CONTROL;-21S4,-,ABS,HB,G3676	
3 KP	AA64-00711C	KNOB POWER;-21S4,NO-SILK,ABS,HB,G3676	
3 WR	AA64-00713B	WINDOW REMOCON;-21S4,-,PC,VO,VIOLET,-	
3 IL	AA64-00714B	INDICATOR LED;-21S4,-,ACRYL,-,CLR,-	
2 DRESPK	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL	
2 L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm	
2 A/SPK	AA96-00812A	ASSY-SPEAKER;PIEZ0,15W,8ohm,SILVER	
3 SPK	3001-001115	SPEAKER;15W,8OHM,93DB+-2DB,110	
3 L/SPK	AA39-00105D	LEAD CONNECTOR ASSY;CT21S6,UL1007#22,UL/	
3 H/SPK	AA91-00320A	ASSY HOLDER SPK;-,-,PIEZ0 ASSY,-,SILVER	
2 CWFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	
2 BADGE	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	
2 GRILLE	AA63-00305A	GRILLE-WOOFER,L;DP,21S3,-,-,-,-,-,AA63	
2 GRILLE	AA63-00304A	GRILLE-WOOFER,R;DP,21S3,-,-,-,-,-,AA63	
2 A-A/V	AA96-01249A	ASSY PCB P-A/V FRONT;15/19/20,K15D	
3 JE601	3722-000143	JACK-PHONE;1P,3.4MM,-,MBAG	
3 JR01	3722-001031	JACK-RCA;3P,3.6MM,#18,AU	
3 RE01	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,	
3 RE02	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,	
3 CE01	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	
3 CE02	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	
3 01VER	AA41-00227B	PCB-A/V;CT-20S4,FR-1,1L,B,1.6T,245X245	
3 CN705A	AA39-20071F	LEAD CONNECTOR-ASSY;YBNH250-12,12P,200MM	

ASSY COVER REAR

1 A/REAR	AA90-04185A	ASSY COVER REAR;K15D,21S6,HIPS,HB,G4309,
2 CB+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2 SPCBC	AA60-00091J	SPACER-FELT;-FELT,330X10,-,-,BLK,TO.5,-
2 B/C	AA64-00188A	CABINET-BACK;-HIPS,HB,G4309
2 AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-,-

ASSY BOX

1 A/BOX	AA92-01997A	ASSY BOX;CT2188BW6X/XAX
2 L/BN	AA68-01793A	LABEL;BOX & NOM,WTH,PAPER,MEX & TIJ
2 PCK	AA69-01314A	PACKING CASE;21S6(SAMEX),CB D-1 BB,A1,72

ASSY LABEL

1 A/LABE	AA92-02275A	ASSY LABEL;CT2188BW6X/XAX
2 INLAB	AA64-60385G	INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2 L/BIO	AA68-00512A	LABEL-STICKER;A/P100(G)-,BIO-TURBO,-,-
2 L/RAT	AA68-01546A	LABEL RATING;TETRONEPAPER90(S)N,SEM
2 L/CRT	AA68-01578A	LABEL BIO;CRT FREE BIO
2 INL/CA	AA64-02055A	INLAY BACK;CAUTION,BLK,LGRY-TXT,23X93,W/

ASSY P/MATERIAL

1 A/PACK	AA92-02552A	ASSY P/MATERIAL;CT2188BW6X/XAX
2 BXTAPE	0203-001295	TAPE-OPP MASKING;1242,TO.06,W100,L91.4M,
2 STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2 C/SET	AA69-00408A	CUSHION SET;21S3,CASTING,TOOL,-,-,-,-

Electrical Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

2 PE-BAG AA69-01208A BAG;SHEET,19-20,W42,L50,FOAM,OEM

ASSY CPT

1 A/CPT AA91-05588A ASSY CPT;A51KQJ63X(HB),21IN,BIO

2 TAPE 0203-000432 TAPE-ACETATE;ACETATETO.25W19WH

△ 2 CRT AA03-10024U CRT-COLOR;A51KQJ63X(HB);-,21inch,-,-,1

2 C-Y AA27-00002A MAGNET-CONVERGENCE;JH291-SC-OB,29.1M

2 D-Y AA27-50004K DEFLECTION-YOKE;-,DST-2192ML(H1),ST-3,A5

2 CDCOIL AA61-00734A HOLDER;25POLYVINYL,DEGAUSSING,CHLORI

2 SPACER AA63-60028A SPACER-DY;-,NEOPRENE,-,BLK,VOW

2 A/TBC AA98-70014C ASSY-TBC WIRE;21,1P,STR

2 TAPE-D 0203-001279 TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y

2 D-COIL AA27-00283A COIL DEGAUSSING;CPTTV,3MH,10%,35TS,4.50

ASSY ACCESSORY

1 A/ACCE AA92-06814A ASSY ACCESSORY;K15D,21,SEM

2 AC/TAP 0203-001279 TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y

2 T/MATC AA26-90001F TRANS-MATCHING;-,3000HM/750HM,NTSC,40-89

2 A/ROD AA42-00004A ANT ROD;VHF,4SDODIPOLE850MMBRN

2 RMT AA59-00108C REMOCON;DPTM59,AA59-00077C,21,STR

2 M/SERV AA68-00501A MANUAL-SERVICE;-,,-,WHT,ALL MEX&TIJ.

2 W/CARD AA68-00559C CARD WARRANTY;-,W/P150(G);-,138X212,-,

2 I/B AA68-02660A MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN

2 L/CONS AA68-01574A LABEL;CONSIGN-REEXPL,W;3,1/2; 1,15

2 T/REG AA68-01585A CARD;REGISTRATION,8.5X11,80GL,MEX

2 BAG-PE AA69-01195A BAG PE;CL29A6W8X,HDPETO.012,93/4X151

7-7 CT21D8BWX/XAX

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05607A	ASSY CHASSIS;K15D,20,STEREO,SEM,CT21D8
2	CLW/HS	AA65-30018A	CLAMP-WIRE,-,NYLON6.6,-,DATL
2	FBT	AA65-30018A	CLAMP-WIRE,-,NYLON6.6,-,DATL
2	A/MAIN	AA96-01072A	ASSY PCB P-MAIN;CT21D8,STEREO,SEM,K15D,2
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,TO-3PF,ST,8
△	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP,8
△	T801S	1404-001045	THERMISTOR NTC;4.7OHM,15%,2900K,35.0MW,T
△	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T
△	CR401S	2303-001015	C-FILM,PPFF;5.5NF,5%,1.6KV,TP
△	CR403S	2306-000004	C-FILM,PPFF;330NF,5%,250V,TP,2
3	C801	2401-002219	C-AL;220UF,20%,400V,-,25X40,10MM,ST
△	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14.2dB,M
3	SWN01	3404-000295	SW-TACT;V;KPT1122R1KEYSTT=0.3M
△	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-
3	CN604	3711-002643	POST-HEADER;YW025-04(AUTO)
3	CN701	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.
3	JA701	3722-001453	JACK-RCA;3P,3.4mm,NI,BLK,-
△	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/AI,SPM-458AN1,64P,
△	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△	T444S	AA26-00065A	TRANS FBT,-,FSV-14A004C(S),14-22,125V
△	T401	AA26-50001B	ORIZ.DRIVE,-,7.1MH,102UH,10-2
△	LR401S	AA27-00053A	COIL-LINEARLITY,-,193uH,DR10X10 C:4.35,7
△	LX801S	AA29-30001D	FILTER-LINE,-,6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P,YBNH250-09,S,400m
△	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△	D806	AA96-00243D	ASSY H/S,-,BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIER;SDS60U20S,200V,6A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-,
3	IC301	AA96-00244A	ASSY H/S,-,AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSO;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS,-,T1.0,-,D1(DREAM) 60X25X
3	IC601	AA96-00244B	ASSY H/S,-,AA62-00046A,TDA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-,DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS,-,T1.0,-,D1(DREAM) 60X25X
△	IC802	AA96-00245A	ASSY H/S,-,AA62-00055A,KA7632,-
4		1203-001939	IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS,-,T1.0,-,35*15*25,D1,-,-,
3	LD901	AA96-00555A	ASSY LED GUIDE,-,UEX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY H/S,-,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS,-,SECC,T1.0,-,33X15X30FT-2
△	IC801S	AA96-00816A	ASSY H/S,-,POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050,T2.0,W54.0,H40.
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3		0202-000187	SOLDER-WIREFLUX,-,RS60S,D1.2,6
△	PT801S	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V
△	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
3	ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6
3	L/PQS	AA68-01018A	LABEL-PQS,-,50mmX,13,-,WHITE,-
3	ICS602	1203-001225	IC-POS.FIXEDREG.;78R09,TO-220,4P,-,PLA
3	GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY,-,YFH800-01,S,1P,300,
3	A/AUTO	AA97-13330A	ASSY AUTO;K15D,20,STEREO,SEM,CT21D8
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING

Loc. No.	Code No.	Description ; Specification	Remark
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D808	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D902	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D501	0402-000254	DIODE-RECTIFIER;RG10J,600V,1A,DO-41
4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ803	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ804	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO
4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.17-4.43V,500mW,DO
4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D
4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
4	Q951	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
4	Q202	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
4	Q601	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
4	Q802	0501-002183	TR-SMALL SIG;KTC9014,NPN,625MW,TO-92,100
4	R207	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	R905	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	R906	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
4	RS603	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1
4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	RS602	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm
4	R409	2001-000022	R-CARBON(S);33OHM,5%,1/2W,AA,TP
4	R823	2001-000037	R-CARBON(S);330OHM,5%,1/2W,AA,TP
4	R808	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP
4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4 R211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R233	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R501	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R502	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R506	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R510	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R511	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R512	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R909	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R911	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R912	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R913	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R914	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R917	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R933	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R934	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R942	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R943	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 RS608	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 RS609	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	
4 R224	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R291A	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R601	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R612	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R807	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R828	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R833	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R910	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R842	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 RS610	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4 R225	2001-000325	R-CARBON;1200HM,5%,1/8W,AA,TP,	
4 RS604	2004-005053	R-METAL;16.6KOHM,1%,18W,AA,TP,1.8X3.2MM	
4 R205	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP	
4 R218	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,	
4 R602	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R604	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R926	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R944	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS601	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS606	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 RS607	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R918	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4 R940	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4 R941	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4 R901	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4 R903	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4 R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4 R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4 R214	2001-000490	R-CARBON;2000HM,5%,1/8W,AA,TP,	
4 R829	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4 R208	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4 R220	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4 R202	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP	
4 R830	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4 R925	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4 R227	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4 R228	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4 R109	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4 R927	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4 RS605	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP	
4 R203	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,	
4 R288	2001-000908	R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R289	2001-000908	R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R110	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R915	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R108	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4 R222	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4 R605	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4 R212	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R215	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R610	2001-000969	R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4 R408	2001-001037	R-CARBON(S);0.390HM,5%,1/2W,AA	
4 R504	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA	
4 R414	2001-001078	R-CARBON(S);15KOHM,5%,1/2W,AA	
4 R832	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R819	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R820	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
4 R840	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,	
4 R411	2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,	
4 R405	2001-001116	R-CARBON(S);270HM,5%,1/2W,AA,T	
4 R821	2001-001125	R-CARBON(S);300KOHM,5%,1/2W,AA	
4 R818	2001-001154	R-CARBON(S);5.1KOHM,5%,1/2W,AB	
4 R805	2001-001170	R-CARBON(S);6.80HM,5%,1/2W,AB,	
4 R850	2001-001170	R-CARBON(S);6.80HM,5%,1/2W,AB,	
4 R831	2001-001197	R-CARBON(S);9100HM,5%,1/2W,AB,TP,2.4X6.4	
4 R501H	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4 R502H	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4 R503	2002-001008	R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△ 4 RY801S	2002-001013	R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4 R402	2003-002178	R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4 R413	2003-000664	R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4 R403	2003-002173	R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4 R827	2003-001023	R-METALOXIDE(S);1200HM,5%,2W,A	
4 R407	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R834	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R834A	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R315	2003-002009	R-METALOXIDE(S);3900HM,5%,2W,A	
4 R316	2003-002009	R-METALOXIDE(S);3900HM,5%,2W,A	
4 R803	2003-002102	R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm	
4 R804	2003-002102	R-METAL OXIDE;68Kohm,5%,2W,AF,TP,4x12mm	
4 R603	2004-000195	R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2mm	
4 R302	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4 R306	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4 R423	2004-001373	R-METAL FILM;RM1/2T100K-F	
4 R817	2004-001377	R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4	
4 R424	2004-001402	R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4 R219	2004-001914	R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4 R822	2004-001983	R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
4 R304	2008-000253	R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4 R305	2008-000253	R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4 R801	2008-001107	R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4 R825	2008-000266	R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4 R303	2008-000266	R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4 R608	2008-000284	R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4 R609	2008-000284	R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4 R824	2008-000294	R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4 R422	2008-001011	R-FUSIBLE(S);0.180HM,10%,2W,AF	
4 R421	2008-001011	R-FUSIBLE(S);0.180HM,10%,2W,AF	
4 R420	2008-001047	R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4 C501	2201-000193	C-CERAMIC,DISC;10PF,0.25PF,50V	
4 C302	2201-000259	C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
4 CS621	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4 CS624	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4 C816	2201-000375	C-CERAMIC,DISC;220PF,5%,50V,RH	
4 CS626	2201-000379	C-CERAMIC,DISC;22NF,+80-20%,50	
4 C908	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NPO	
4 C909	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NPO	
4 C408	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	
△ 4 CR404S	2201-000639	C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4 C503	2201-000723	C-CERAMIC,DISC;4.7nf,20%,3KV,Y5U,TP,16x5	
4 C811	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	
4 C814	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	
△ 4 CR409S	2201-002028	C-CERAMIC,DISC;0.47nf,10%,2kv,Y5P,TP,7.5	
4 C105	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C111	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C912	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C226	2202-000231	C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4 C223	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C224	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C602	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C906	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C505	2202-000106	C-CERAMIC,MLC-AXIAL;1.5nf,20%,16V,Y5P,TP	
4 C211	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4 C502	2301-000213	C-FILM,PEF;220NF,5%,250V,21.5X	
4 C109	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C804	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C805	2301-000235	C-FILM,PEF;3.9NF,5%,50V,6.5X3.0X5.5MM,5M	
4 C309	2301-000254	C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4 C227	2301-000301	C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4 C217	2301-000342	C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,	
4 C234	2301-000342	C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,	
4 CS606	2301-000356	C-FILM,PEF;47nf,5%,50V,TP,7.5x4.0x6.5,5m	
4 C407	2301-000383	C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm	
4 C248	2301-000445	C-FILM,PEF;4.7nf,5%,50V,TP,5.5x7x3mm,5mm	

Loc. No.	Code No.	Description ; Specification	Remark
4	C420	2301-001065 C-FILM,MPPF;47NF,55,630V,TP;19	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2kV,TP;15x8x12.5mm	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-,5MM	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS602	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS608	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP,	
4	CS609	2401-000480 C-AL;100UF,20%,50V,GP;5X11MM,5M	
4	CS620	2401-000480 C-AL;100UF,20%,50V,GP;5X11MM,5M	
4	CS623	2401-000480 C-AL;100UF,20%,50V,GP;5X11MM,5M	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP;16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	CS629	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP;8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP;8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP;GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS603	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS611	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS613	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS614	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS616	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	CS617	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C820	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C815	2401-000703 C-ELEC;CE04-40/8525VT222-MWSD	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP;13X20MM,	
4	C110	2401-000962 C-AL;22UF,20%,50V,GP;TP;5x11,5	
4	CS601	2401-000962 C-AL;22UF,20%,50V,GP;TP;5x11,5	
4	CS610	2401-001026 C-AL;3.3UF,20%,50V,GP;5X11MM,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP;6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP;10X12.5	
4	CS607	2401-001334 C-ALUMINUM;470NF,20%,50V,GP;5*11MM,2MM,T	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP;10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100uF,20%,16V,GP;TP;6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100uF,20%,16V,GP;TP;6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100uF,20%,16V,GP;TP;6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100uF,20%,16V,GP;TP;6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100uF,20%,16V,GP;TP;6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP;TP;10X20	
4	CS604	2401-002075 C-AL;4.7uF,20%,50V,GP;TP;5x11,5mm	
4	CS615	2401-002075 C-AL;4.7uF,20%,50V,GP;TP;5x11,5mm	
4	CS618	2401-002075 C-AL;4.7uF,20%,50V,GP;TP;5x11,5mm	
4	CS619	2401-002075 C-AL;4.7uF,20%,50V,GP;TP;5x11,5mm	
4	C901	2401-002144 C-AL;47uF,20%,16V,GP;TP;5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP;TP;5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP;TP;5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP;TP;5X11,2.5	
4	CS612	2401-000050 C-AL;10UF,20%,16V,GP;TP;5X11,2.5	
4	C813	2401-002290 C-AL;47uF,20%,160V,GP;TP;13x20,5	
4	C101	2401-002594 C-AL;220uF,20%,16V,GP;TP;8x11,5,5	
4	C406	2401-002619 C-AL;47uF,20%,25V,GP;TP;5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP;6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	
△	4	L403 3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	4	FD801S 3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,-,30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J806	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J118	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J133	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J126	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J127	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	01VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1L,B,1.6T,245	
4	EY401	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY402	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY403	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY404	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY405	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY414	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY415	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY416	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY417	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY418	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY419	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY420	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY421	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY501	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY819	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY827	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY829	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY833	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY701	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EY702	AA60-40011A EYELET;-,ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL801	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	EL802	AA60-40011B EYELET;-,ID2.2,OD3.2,-,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT101	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	R816	2001-000117 R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
4	Z201	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-	
4	IC803	1203-001217 IC-POST,ADJUSTREG;431,T0-92,3P,4.58ML,P	
4	C915	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
4	R505	2008-000264 R-FUSIBLE(S);10HM,5%,1W,AF,TP	
4	L803	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	L802	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP	
4	C810	2301-000192 C-FILM,PEF;1NF,5%,50V,5.3X10MM	
4	CS631	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C603	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	R607	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	RS613	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	C604	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3	
4	CS632	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3	
4	C232	2201-000262 C-CERAMIC,DISC;180PF,10%,50V,Y	
4	RS612	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	RS614	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
△	PWR/AC	AA96-20112A ASSY-POWER,CORD;EP2/NP/H/C300	
3		AA39-10006K POWER-CORD;KJ-10W,AWG SPT-2	
3		AA61-20284A HOLDER P CORD;PP,VO,BLK,KE-002	

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY COVER FRONT

1	A/CFRN	AA90-04436A	ASSY COVER FRONT;21D8,SV907P;K15D,HIPS,H
2	SPK	3001-000274	SPEAKER-GENERAL;5W80HM100X50MM
2	PAS+CF	6002-000522	SCREW-TAPPING;TH,+2,M4,L15,ZP
2	SPK+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2	L/SPK	AA39-20505M	LEAD-CONNECTOR;SY4XREC,R700/L350
2	S/GUM	AA60-00038A	SPACER-CRT;PS,SHEET,T1.0,BLK,OD22,ID10
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR
2	STOPPE	AA61-40113A	STOPPER-PCB;-ABS,HB,NTR
2	IN/AV	AA64-01309M	INLAY AV;PS SHEET,21D8,T0.3,K15A L/S
2	C/F	AA64-01423J	CABINET FRONT;21D8,SV907P EDBV,HIPS,HB,G
2	KC+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,OD6,H
3	SPCF	AA63-60001V	SPACER-FELT;-FELT,T0.5,-,200X15,-
3	IL	AA64-01011B	INDICATOR LED;29D8,ACRYL,-,CLR,-,-,-
3	KC	AA64-01012B	KNOB CONTROL;29D8,ABS,-,G3676,SV-907P,HB
3	KP	AA64-01425B	KNOB POWER;21D8,ABS,-,G3676,SV907P,HB,-
3	WR	AA64-01426B	WINDOW REMOCON;21D8,PC,-,-,VOILET,-,-
2	BADGE	AA64-70123B	BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG
2	DRES	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL
2	CW/FC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	A/A-V	AA96-01234A	ASSY PCB P;A/V SIDE,20,K15D
3	CN705A	AA39-20071F	LEAD CONNECTOR-ASSY;YBNH250-12,12P,200MM
3	JE601	3722-000143	JACK-PHONE;1P,3.4MM,-,MBAG
3	JR01	3722-001031	JACK-RCA;3P,3.6MM,#18,AU
3	RE01	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA
3	RE02	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA
3	CE01	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M
3	CE02	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M
3	OOVER	AA41-00414A	PCB-SIDE A/V;CT21D8,FR-1,1L,A,1.6T,245x2

ASSY COVER REAR

1	A/REAR	AA90-04260A	ASSY COVER REAR;K15D,21D8,HIPS,HB,G4309
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA63-60001X	SPACER-FELT;FELT,T0.5,330X15MM
2	B/C	AA64-01422E	CABINET BACK;21D8,HIPS,-,-,-,HB,G4309,-
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-,-

ASSY BOX

1	A/BOX	AA92-02003A	ASSY BOX;CT21D8BW6X/XAX
2	L/BN	AA68-01793A	LABEL;BOX & NOM,WTH,PAPER,MEX & TIJ
2	PCK	AA69-00724F	PACKING CASE;21D8,D-2 BB,YEL,NF-AMER BIO

ASSY LABEL

1	A/LABE	AA92-02280A	ASSY LABEL;CT21D8BW6X/XAX
2	INLAB	AA64-60385G	INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2	L/RAT	AA68-01546A	LABEL RATING;TETRONCPAPER90(S)N,SEM
2	L/CRT	AA68-01578A	LABEL BIO;CRT FREE BIO

ASSY P/MATERIAL

1	A/PACK	AA92-02557A	ASSY P/MATERIAL;CT21D8BW6X/XAX
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-00674B	CUSHION SET;21D8,EPS,-,-,-,-,C=0.02,-
2	PE-BAG	AA69-01208A	BAG;SHEET,19-20,W42,L50,FOAM,OEM

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CPT

1	A/CPT	AA91-05588A	ASSY CPT;A51KQJ63X(HB),21IN,BIO
2	TAPE	0203-000432	TAPE-ACETATE;ACETATET0.25W19WH
△ 2	CRT	AA03-10024U	CRT-COLOR;A51KQJ63X(HB),-,21inch,-,-,1
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-Y	AA27-50004K	DEFLECTION-YOKE,-,DST-2192ML(H1),ST-3,A5
2	CD COIL	AA61-00734A	HOLDER;25POLYVINYL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A	SPACER-DY,-,NEOPRENE,-,BLK,V0W
2	A/TBC	AA98-70014C	ASSY-TBC WIRE;21,1P,STR
2	TAPE-D	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	D-COIL	AA27-00283A	COIL DEGAUSSING,CPTTV,3MH,10%,35TS,4.50

ASSY ACCESSORY

1	A/ACCE	AA92-07013A	ASSY ACCESSORY;K15D,21,SEM
2	AC/TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	T/MATC	AA26-90001F	TRANS-MATCHING,-,3000HM/750HM,NTSC,40-89
2	A/ROD	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN
2	RMT	AA59-00108C	REMOCON;DP,TM59,AA59-00077C,21,STR
2	M/SERV	AA68-00501A	MANUAL-SERVICE,-,-,WHT,ALL MEX&TIJ.
2	W/CARD	AA68-00559C	CARD WARRANTY,-,-,W/P150(G),-,138X212,-,
2	I/B	AA68-02660A	MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN
2	L/CONS	AA68-01574A	LABEL;CONSIGN-REEXPL,WV,3,1/2; 1,15
2	T/REG	AA68-01585A	CARD;REGISTRATION,8.5X11,80GL,MEX
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151

7-8 CT21D8WFX/STR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

ASSY CHASSIS

1	A/CHAS	AA91-05606A	ASSY CHASSIS;K15D,20,STEREO,LATIN,CT21D
2	CLW/HS	AA65-30018A	CLAMP-WIRE;-;NYLON6.6;-;DATL
2	FBT	AA65-30018A	CLAMP-WIRE;-;NYLON6.6;-;DATL
2	A/MAIN	AA96-01073A	ASSY PCB P-MAIN;CT21D8/9,STEREO,LTN,K15D
3	Q401	0502-001115	TR-POWER;KSC5386,NPN,50W,TO-3PF,ST,8
3	IC902	1103-001209	IC-EEPROM;AT24C04-PC27 C,512Kx8Bit,DIP,8
△	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T
△	CR401S	2303-001015	C-FILM,PPF;5.5NF,5%,1.6KV,TP
△	CR403S	2306-000004	C-FILM,MPPF;330NF,5%,250V,TP,2
3	C801	2401-002219	C-AL;220UF,20%,400V,-,25X40,10MM,ST
△	SF101S	2904-001221	FILTER-SAW AV,45.75MHz,SIP5K,ST,14,2dB,M
3	SWN01	3404-000295	SW-TACT,Y;KPT1122R1KEYSTT=0.3M
△	FP801S	3601-001012	FUSE-FERRULE;250V,4A,SLOW-BLOW
△	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NL,-
3	CN604	3711-002643	POST-HEADER;YW025-04(AUTO)
3	CN701	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.
3	JA701	3722-001453	JACK-RCA;3P3,4mm,NL,BLK,-
△	IC201S	AA09-00318A	IC MICOM;TDA9377PS/N2/Al,SPM-458AN1,64P,
△	T801S	AA26-00172A	TRANS-SWITCHING;EER3543,K15D,90-264,PM2A
△	T440S	AA26-00065A	TRANS FBT;-;FSV-14A004C(S),14-22,125V
△	T401	AA26-50001B	ORIZ.DRIVE;-;7.1MH,102UH,10-2
△	LR401S	AA27-00053A	COIL-LINEARLITY;-;193uH,DR10X10 C:4.35,7
△	LX801S	AA29-30001D	FILTER-LINE;-;6.0MH,2A,-,SQ191
3	RM901	AA32-00015A	MODULE-REMOCON;FRP-3521H31,38KHZ,940MM,M
3	CN501	AA39-20620B	LEAD-CONNECTOR;ASSY,9P;YBNH250-09,S,400m
△	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△	D806	AA96-00243D	ASSY H/S;-;BRIDGE,AA62-00045A,D06U20S,D
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001374	DIODE-RECTIFIER;SDS60U20S,200V,6A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-;T1.0,-,DREAM,-,-,-,-
3	IC301	AA96-00244A	ASSY H/S;-;AA62-00046A,LA7840,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1204-001483	IC-VERTICAL PROCESSOR;LA7840,SIP,7P,708MI
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
3	IC601	AA96-00244B	ASSY H/S;-;AA62-00046A,TA7266S,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001308	IC-POWERAMP;7266,ZIP,15P,-,DUAL,26dB,PL
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00046A	HEAT SINK-PS;-;T1.0,-,D1(DREAM) 60X25X
△	IC802	AA96-00245A	ASSY H/S;-;AA62-00055A,KA7632,-
4		1203-001939	IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-;T1.0,-.35*15*25,D1,-,-
3	LD901	AA96-00555A	ASSY LED GUIDE;-;UFX-LD-030,GREEN
3	IC501	AA96-50311A	ASSY H/S;-;VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	IC-VIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-;SECC,T1.0,-.33X15X30FT-2
△	IC801S	AA96-00816A	ASSY H/S;POWER,AA62-00112A,5Q0765RT,TR
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-001932	IC-PWM CONTROLLER;5Q0765,TO-220F,5P,185M
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00112A	HEAT SINK;TROJAN,AL1050,T2.0,W54.0,H40.
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3		0202-000187	SOLDER-WIREFLUX;-;RS60S,D1,2,6
3	ICS601	1204-001974	IC-SOUND PROCESSOR,UPC1851BCU,SDIP,42P,6
3	L/PQS	AA68-01018A	LABEL-PQS;-;50mmX,13,-,WHITE,-
△	P803S	1404-001265	THERMISTOR-PTC;4.5OHM/1000HM,+30/-20%,22
3	GT101A	AA39-20010H	LEAD-CONNECTOR,ASSY;YFH800-01,S,1P,300,
3	A/AUTO	AA97-13329A	ASSY AUTO;K15D,20,STEREO,LATIN,CT21D8/9
4	D201	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D601	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

△	4	D804	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
	4	D303	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△	4	D809	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
	4	D501	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41
	4	D302	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
	4	D301	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D304	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D401	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
	4	D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D812	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△	4	D801S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D802S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D803S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D804S	0402-001111	DIODE-RECTIFIER;1N5397GP,600V,1.5A,DO-2
△	4	D805	0402-001443	DIODE-RECTIFIER;EGP20K,800V,2A,DO-15,TP
	4	DZ211	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ401	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ903	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ904	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ905	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
	4	DZ803	0403-001039	DIODE ZENER;MA2560,56V,52-60V,1W,DO-41,T
	4	DZ101	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ303	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
	4	DZ604	0403-000719	DIODE-ZENER;MTZJ7.5B,7.5V,7.07-7.45V,500
	4	DZ201	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ306	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ307	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ806	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ807	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
	4	DZ801	0403-001140	DIODE-ZENER;RD10ESAB-T4,10V,9.19-10.30V,
	4	DZ204	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D
	4	DZ302	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D
	4	DZ802	0403-001318	DIODE-ZENER;MTZJ4.3B,4.3V,4.17-4.43V,500mW,D
	4	DZ901	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V,5.07V,500mW,D
	4	DZ805	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D
	4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D
	4	Q201	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q901	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM
	4	Q402	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)
	4	Q202	0501-002183	TR-SMALL SIG;KTC901A,NPN,625MW,TO-92,100
	4	Q601	0501-002183	TR-SMALL SIG;KTC901A,NPN,625MW,TO-92,100
	4	R207	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	R905	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	R906	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP
	4	RS603	2001-000007	R-CARBON;3K0HM,5%,1/8W,AA,TP,1
	4	R206	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	4	RS602	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	4	R301	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP
	4	R843	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm
	4	R409	2001-000022	R-CARBON(S);330HM,5%,1/2W,AA,T
	4	R823	2001-000037	R-CARBON(S);3300HM,5%,1/2W,AA,
	4	R808	2001-001138	R-CARBON(S);3900HM,5%,1/2W,AA,
	4	R902	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R904	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
	4	R211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R233	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R501	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R502	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R506	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R510	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R511	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP
	4	R512	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4	R909	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R911	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R912	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R913	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R914	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R917	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R933	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R934	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R942	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R943	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RS609	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R224	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R291A	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R601	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R828	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R910	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	RS610	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R225	2001-000325 R-CARBON;1200HM,5%,1/8W,AA,TP,	
4	RS604	2004-005053 R-METAL;16.6KOHM,1%,18W,AA,TP,1.8X3.2MM	
4	R205	2001-000397 R-CARBON;180KOHM,5%,1/8W,AA,TP	
4	R218	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP,	
4	R602	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R926	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R944	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS601	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS606	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RS607	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R918	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R940	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R941	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R901	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R903	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R214	2001-000490 R-CARBON;2000HM,5%,1/8W,AA,TP,	
4	R829	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R208	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R220	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	R202	2001-000689 R-CARBON;390KOHM,5%,1/8W,AA,TP	
4	R925	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R227	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R228	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R109	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R927	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
4	RS605	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP	
4	R203	2001-000857 R-CARBON;5600HM,5%,1/8W,AA,TP,	
4	R288	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R289	2001-000908 R-CARBON ;62Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R110	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R915	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R108	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R222	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R605	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R212	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R215	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R610	2001-000969 R-CARBON;750HM,5%,1/8W,AA,TP,1	
4	R408	2001-001037 R-CARBON(S);0.390HM,5%,1/2W,AA	
4	R504	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R414	2001-001078 R-CARBON(S);15KOHM,5%,1/2W,AA,	
4	R840	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,	
4	R411	2001-001114 R-CARBON(S);2700HM,5%,1/2W,AA,	
4	R405	2001-001116 R-CARBON(S);270HM,5%,1/2W,AA, T	
4	R809	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R810	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R831	2001-001045 R-CARBON(S);1.2KOHM,5%,1/2W,AB	
4	R501H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R502H	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
4	R503	2002-001008 R-COMPOSITION;1.8KOHM,10%1/2W,AA,TP,3.7	
△	RY801S	2002-001013 R-COMPOSITION;4.7MOhm,5%,1/2W,AA,TP,3.7X	
4	R402	2003-002178 R-METAL OXIDE(S) 1Kohm,5%,2W,AG,TP,3.9X1	
4	R413	2003-000664 R-METAL OXIDE(S);330HM,5%,2W,AF,TP,4X12M	
4	R403	2003-002173 R-METAL OXIDE(S);7.5Kohm,5%,2W,AG,TP,3.9	
4	R827	2003-000998 R-METALOXIDE;3000HM,5%,2W,AF,T	
4	R407	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	

Loc. No.	Code No.	Description ; Specification	Remark
4	R834	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4	R315	2003-002009 R-METALOXIDE(S);3900HM,5%,2W,A	
4	R316	2003-002009 R-METALOXIDE(S);3900HM,5%,2W,A	
4	R603	2004-000195 R-METAL;100Kohm,1%,1/8W,AA,TP,1.8x3.2m	
4	R302	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R306	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4	R423	2004-001373 R-METAL,FILM,RM1/2T100K-F	
4	R424	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4	R219	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4	R304	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R305	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,	
4	R801	2008-001107 R-FUSIBLE(S);300ohm,5%,2W,AG,TP,3.9x12mm	
4	R825	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R303	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	R608	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R609	2008-000284 R-FUSIBLE(S);0.10HM,10%,2W,AF,TP,3.9X10M	
4	R824	2008-000294 R-FUSIBLE;330HM,5%,2W,AF,TP,3.	
4	R422	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R421	2008-001011 R-FUSIBLE(S);0.180HM,10%,2W,AF	
4	R420	2008-001047 R-FUSIBLE(S);68ohm,5%,2W,AF,TP,3.9x10mm	
4	C501	2201-000193 C-CERAMIC,DISC;10PF,0.25PF,50V	
4	C302	2201-000259 C-CERAMIC,DISC;180PF,10%,500V,Y5P,6X4MM,	
4	CS621	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS624	2201-000327 C-CERAMIC,DISC;2.2NF,10%,50V,Y	
4	CS626	2201-000379 C-CERAMIC,DISC;22NF,+80-20%,50	
4	C908	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C909	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NPO	
4	C408	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,	
△	CR404S	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T	
4	C503	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4	C811	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
4	C814	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K	
△	CR409S	2201-002028 C-CERAMIC,DISC;0.47nF,10%,2KV,Y5P,TP,7.5	
4	C105	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C111	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C912	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4	C226	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3.	
4	C223	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C224	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C602	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C906	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4	C211	2202-002037 C-CERAMIC,MLC-AXIAL;100NF,+80-20	
4	C502	2301-000213 C-FILM,PEF;220NF,5%,250V,21.5X	
4	C109	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C804	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	C805	2301-000235 C-FILM,PEF;3.9NF,5%,50V,6.5X3.0X5.5MM,5M	
4	C309	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	C227	2301-000301 C-FILM,PEF;6.8NF,5%,50V,6.5X5.	
4	C217	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	C234	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4	CS606	2301-000356 C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
4	C407	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	C248	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	C420	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	C806	2301-001435 C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
4	C312	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	C301	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5MM	
4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	C233	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
△	CR405S	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	C916	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	C103	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C207	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C208	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C210	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C218	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C230	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C803	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C819	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C913	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C920	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS602	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	CS608	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C225	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP,	

Electrical Parts List

Loc. No.	Code No.	Description ; Specification	Remark
4	CS609	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	CS620	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	CS623	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C812	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C817	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C821	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C823	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CS629	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C307	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C308	2401-000360 C-AL;100UF,20%,50V,GP,8X11MM,5	
4	C506	2401-000430 C-ELECTROLYTIC;CE04WTPAG250V10	
4	C403	2401-000560 C-AL;1UF,20%,160V,GP,GT,6.3,11MM	
4	C219	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C601	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS603	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS611	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS613	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS614	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS616	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CS617	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C221	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	CS605	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	CS622	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	CS625	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	C820	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	C280	2401-000660 C-ELECTROLYTIC;CE04WTPAG50V2.2	
4	C815	2401-000703 C-ELEC;CE04-40/8525VT222-MWSD	
4	C827	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C110	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS601	2401-000962 C-AL;22UF,20%,50V,GP,TP,5x11,5	
4	CS610	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C802	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C504	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	CS607	2401-001334 C-ALUMINUM;470NF,20%,50V,GP,5*11MM,2MM,T	
4	C304	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C306	2401-002288 C-ELEC;CE04-55/10525VT471-MWRG	
4	C209	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C213	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C229	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C903	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C910	2401-000025 C-ALUMINUM;100UF,20%,16V,GP,TP,6.3x11,5	
4	C605	2401-001998 C-AL;1000UF,20%,25V,GP,TP,10X20	
4	CS604	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS615	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS618	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	CS619	2401-002075 C-AL;4.7UF,20%,50V,GP,TP,5x11,5mm	
4	C901	2401-002144 C-AL;47UF,20%,16V,GP,TP,5x11,5	
4	C203	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C220	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C231	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	CS612	2401-000050 C-AL;10UF,20%,16V,GP,TP,5X11,2.5	
4	C813	2401-002290 C-AL;47UF,20%,160V,GP,TP,13x20,5	
4	C101	2401-002594 C-AL;220UF,20%,16V,GP,TP,8x11,5,5	
4	C406	2401-002619 C-AL;47UF,20%,25V,GP,TP,5x11,5	
4	C818	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	L103	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L202	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L903	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	R102	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L203	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L301	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L302	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L404	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L102	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L201	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L230	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L405	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L902	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L904	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L804	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	L807	2701-001030 INDUCTOR-AXIAL;43uH,10%,14x4.5mm	
4	X901	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	
4	L808	2901-000297 FILTER-EMI ON BOARD;-.3A,-,3.5x5,TP,-	
△	L403	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	J124	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	

Loc. No.	Code No.	Description ; Specification	Remark
4	L206	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	SW901	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW902	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW903	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW904	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
4	SW905	3404-000244 SWITCH-TACT;15V,20MA,90-170GF,	
△	FD801S	3601-001086 FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
4	F801A	3602-000114 FUSE-HOLDER;-.30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-.30MOHM	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J104	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J111	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J112	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J113	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J114	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J115	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J117	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J120	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J121	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J122	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J123	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J128	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J129	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J130	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J131	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J132	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J135	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J136	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J137	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J138	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J139	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J140	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J142	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J150	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J401	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J605	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J606	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J801	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J802	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J803	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J804	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J807	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J808	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JAW02	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	JS601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R229	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R309	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R507	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R508	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R509	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R850	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J125	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	L805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J143	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J811	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J133	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	R805	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J822	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J402	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J823	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J126	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J127	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	O1VER	AA41-00625B PCB-MAIN;TXM1967X/XAA,FR-1,1LB,1.6T,245	
4	EY401	AA60-40011A EYELET;-.ID2,0,OD2.8,-,BST	
4	EY402	AA60-40011A EYELET;-.ID2,0,OD2.8,-,BST	

Loc. No.	Code No.	Description ; Specification	Remark
4	EY403	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY404	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY405	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY414	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY415	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY416	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY417	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY418	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY419	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY420	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY421	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY501	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY819	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY827	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY829	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY833	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY701	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EY702	AA60-40011A EYELET; ,ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET; ,ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET; ,ID2.2,OD3.2,-,-,BSP	
4	EL801	AA60-40011B EYELET; ,ID2.2,OD3.2,-,-,BSP	
4	EL802	AA60-40011B EYELET; ,ID2.2,OD3.2,-,-,BSP	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT101	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	Z201	Z903-000129 FILTER-CERAMIC;BR,4.5MHz,-,-,-,TP,-	
4	C915	2401-002009 C-AL;100UF,20%,16V,GP,TP6.3X7	
4	R505	2008-000264 R-FUSIBLE(S);10HM,5%,1WV,AF,TP,	
4	L803	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,-,TP,	
4	L802	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,-,TP,	
4	CS631	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C603	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	R607	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP,	
4	RS613	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP,	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	C604	Z301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	CS632	Z301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.	
4	C232	Z201-000262 C-CERAMIC,DISC;180PF,10%,50V,Y	
4	R811	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP;3.9	
4	R812	2003-002239 R-METAL OXIDE(S);100KOHM,5%,2W,AF,TP;3.9	
4	RS612	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	RS614	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
3	ICS602	1203-001225 IC-POS.FIXEDREG.;78R09,TO-220,4P,-,PLA	
△	PWR/AC	AA96-20109C ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	
3		AA39-10006X POWER-CORD;- ,KKP419C,KLCE-2F,2.286MT	
3		AA61-20284A HOLDER P CORD;PP,V0,BLK,KE-002	

ASSY COVER FRONT

1	A/CFRN	AA90-04436A ASSY COVER FRONT;21D8,SV907PK15D,HIPS,H
2	SPK	3001-000274 SPEAKER-GENERAL;5W80HM100X50MM
2	PAS+CF	6002-000522 SCREW-TAPPING;TH,+,2,M4,L15,ZP
2	SPK+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	L/SPK	AA39-20505M LEAD-CONNECTOR;SY4XREC,R700/L350
2	S/GUM	AA60-00038A SPACER-CRT;PS,SHEET,T1.0,BLK,OD22,ID10.
2	CRT+CF	AA60-10050R SCREW-ASSY;WC,HH,+,M5,L31.5,SWR
2	STOPPE	AA61-40113A STOPPER-PCB;- ,ABS,HB,NTR.
2	IN/AV	AA64-01309M INLAY AV;PS SHEET,21D8,T0.3,K15A,L/S
2	C/F	AA64-01423J CABINET FRONT;21D8,SV907P EDBV,HIPS,HB,G
3	KC+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SPRING	AA61-60003J SPRING-CS;-,-,SUS304,0.5,OD6,H
3	SPCFC	AA63-60001V SPACER-FELT;- ,FELT,T0.5,-,200X15,-
3	IL	AA64-01011B INDICATOR LED;29D8,ACRYL,-,CLR,-,-,-
3	KC	AA64-01012B KNOB CONTROL;29D8,ABS,-,G3676,SV-907P;HB

Loc. No.	Code No.	Description ; Specification	Remark
3	KP	AA64-01425B KNOB POWER;21D8,ABS,-,G3676,SV907P;HB,-	
3	WR	AA64-01426B WINDOW REMOCON;21D8,PC,-,-,-,VOILET,-,-	
2	BADGE	AA64-70123B BADGE-BRAND;AL,R2000,SILVER,L=50,SAMSUNG	
2	DRES	AA65-30018A CLAMP-WIRE;- ,NYLON6.6,-,-,DATL	
2	CW/FC	AA65-30105A CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	
2	L/QMS	AA68-02391A LABEL-QMS;ART-PAPER(90)G,110x24mm	
2	A/A-V	AA96-01234A ASSY PCB P;A/V SIDE,20,K15D	
3	CN705A	AA39-20071F LEAD CONNECTOR-ASSY;YBNH250-12,12P,200MM	
3	JE601	3722-000143 JACK-PHONE;1P,3.4MM,-,MBAG	
3	JR01	3722-001031 JACK-RCA;3P,3.6MM,#18,AU	
3	RE01	2001-001077 R-CARBON(S);1500HM,5%,1/2W,AA,	
3	RE02	2001-001077 R-CARBON(S);1500HM,5%,1/2W,AA,	
3	CE01	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
3	CE02	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
3	00VER	AA41-00414A PCB-SIDE A/V;CT21D8,FR-1,1L,A,1.6T,245x2	

ASSY COVER REAR

1	A/REAR	AA90-04260A ASSY COVER REAR;K15D,21D8,HIPS,HB,G4309
2	CB+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA63-60001X SPACER-FELT;FELT,T0.5,330X15MM
2	B/C	AA64-01422E CABINET BACK;21D8,HIPS,-,-,-,HB,G4309,-
2	AC+BC	AA65-30008A CLAMP-CORD;- ,PE,HB,BLK,-,-

ASSY BOX

1	A/BOX	AA92-02007A ASSY BOX;CT21D9W6X/RCL
2	L/BOX	AA68-01542A LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-00724F PACKING CASE;21D8,D-2 BB,YEL,NT-AMER BIO

ASSY LABEL

1	A/LABE	AA92-02283A ASSY LABEL;CT21D9W6X/GSU
2	INLAB	AA64-60385G INLAY BACK;3E,K15A-1 3PIN S/T,PS SHEET,T
2	L/RAT	AA68-01547A LABEL RATING;TETTRONEPAPER90(S)B,LATIN

ASSY P/MATERIAL

1	A/PACK	AA92-02561A ASSY P/MATERIAL;CT21D9W6X/RCL
2	BXTAPE	0203-001295 TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-00674B CUSHION SET;21D8,EPS,-,-,-,-,C=0.02,-
2	PE-BAG	AA69-01208A BAG;SHEET,19-20,W42,L50,FOAM,0EM

ASSY CPT

1	A/CPT	AA91-05580A ASSY CPT;A51KQJ63X(H)21INCH,0MG,90DEG
2	TAPE	0203-000432 TAPE-ACETATE;ACETATET0.25W19WH
△	CRT	AA03-10027E CRT-COLOR;A51KQJ63X(H)21inch,0mg,90deg
2	C-Y	AA27-00002A MAGNET-CONVERGENCE;JH291-SC-0B,29.1M
2	D-COIL	AA27-00283A COIL DEGAUSSING;CPTTV,3MH,10%,35TS,4.50
2	D-Y	AA27-50004K DEFLECTION-YOKE;- ,DST-2192ML(H1),ST-3,A5
2	CDCOIL	AA61-00734A HOLDER;25POLYVINYL,DEGAUSSING,CHLORI
2	SPACER	AA63-60028A SPACER-DY;- ,NEOPRENE,-,BLK,V0W
2	A/TBC	AA98-70014C ASSY-TBC WIRE;21,1P,STR
2	TAPE-D	0203-001279 TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y


Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

ASSY ACCESSORY

1	A/ACCE	AA92-07014A	ASSY ACCESSORY;K15D,21,STR				
2	AC/TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y				
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP				
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA				
2	T/MATC	AA26-90001F	TRANS-MATCHING;-;3000HM/750HM,NTSC,40-89				
2	A/ROD	AA42-00005A	ANT ROD,;1000MM,5SECTIONS				
2	RMT	AA59-00108C	REMOCON;DP,TM59,AA59-00077C,21,STR				
2	I/B1	AA68-02660A	MANUAL USERS;SPA,W/P100(G),B5,K15D,LATIN				
2	I/B2	AA68-02659A	MANUAL USERS;ENG,W/P100(G),B5,K15D,LATIN				
2	C/WARR	AA68-40004B	CARD-WARRANTY;W/P100(G),WHITE/BLUE,PERU				
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151				


8. Block Diagram

8-1 K15D

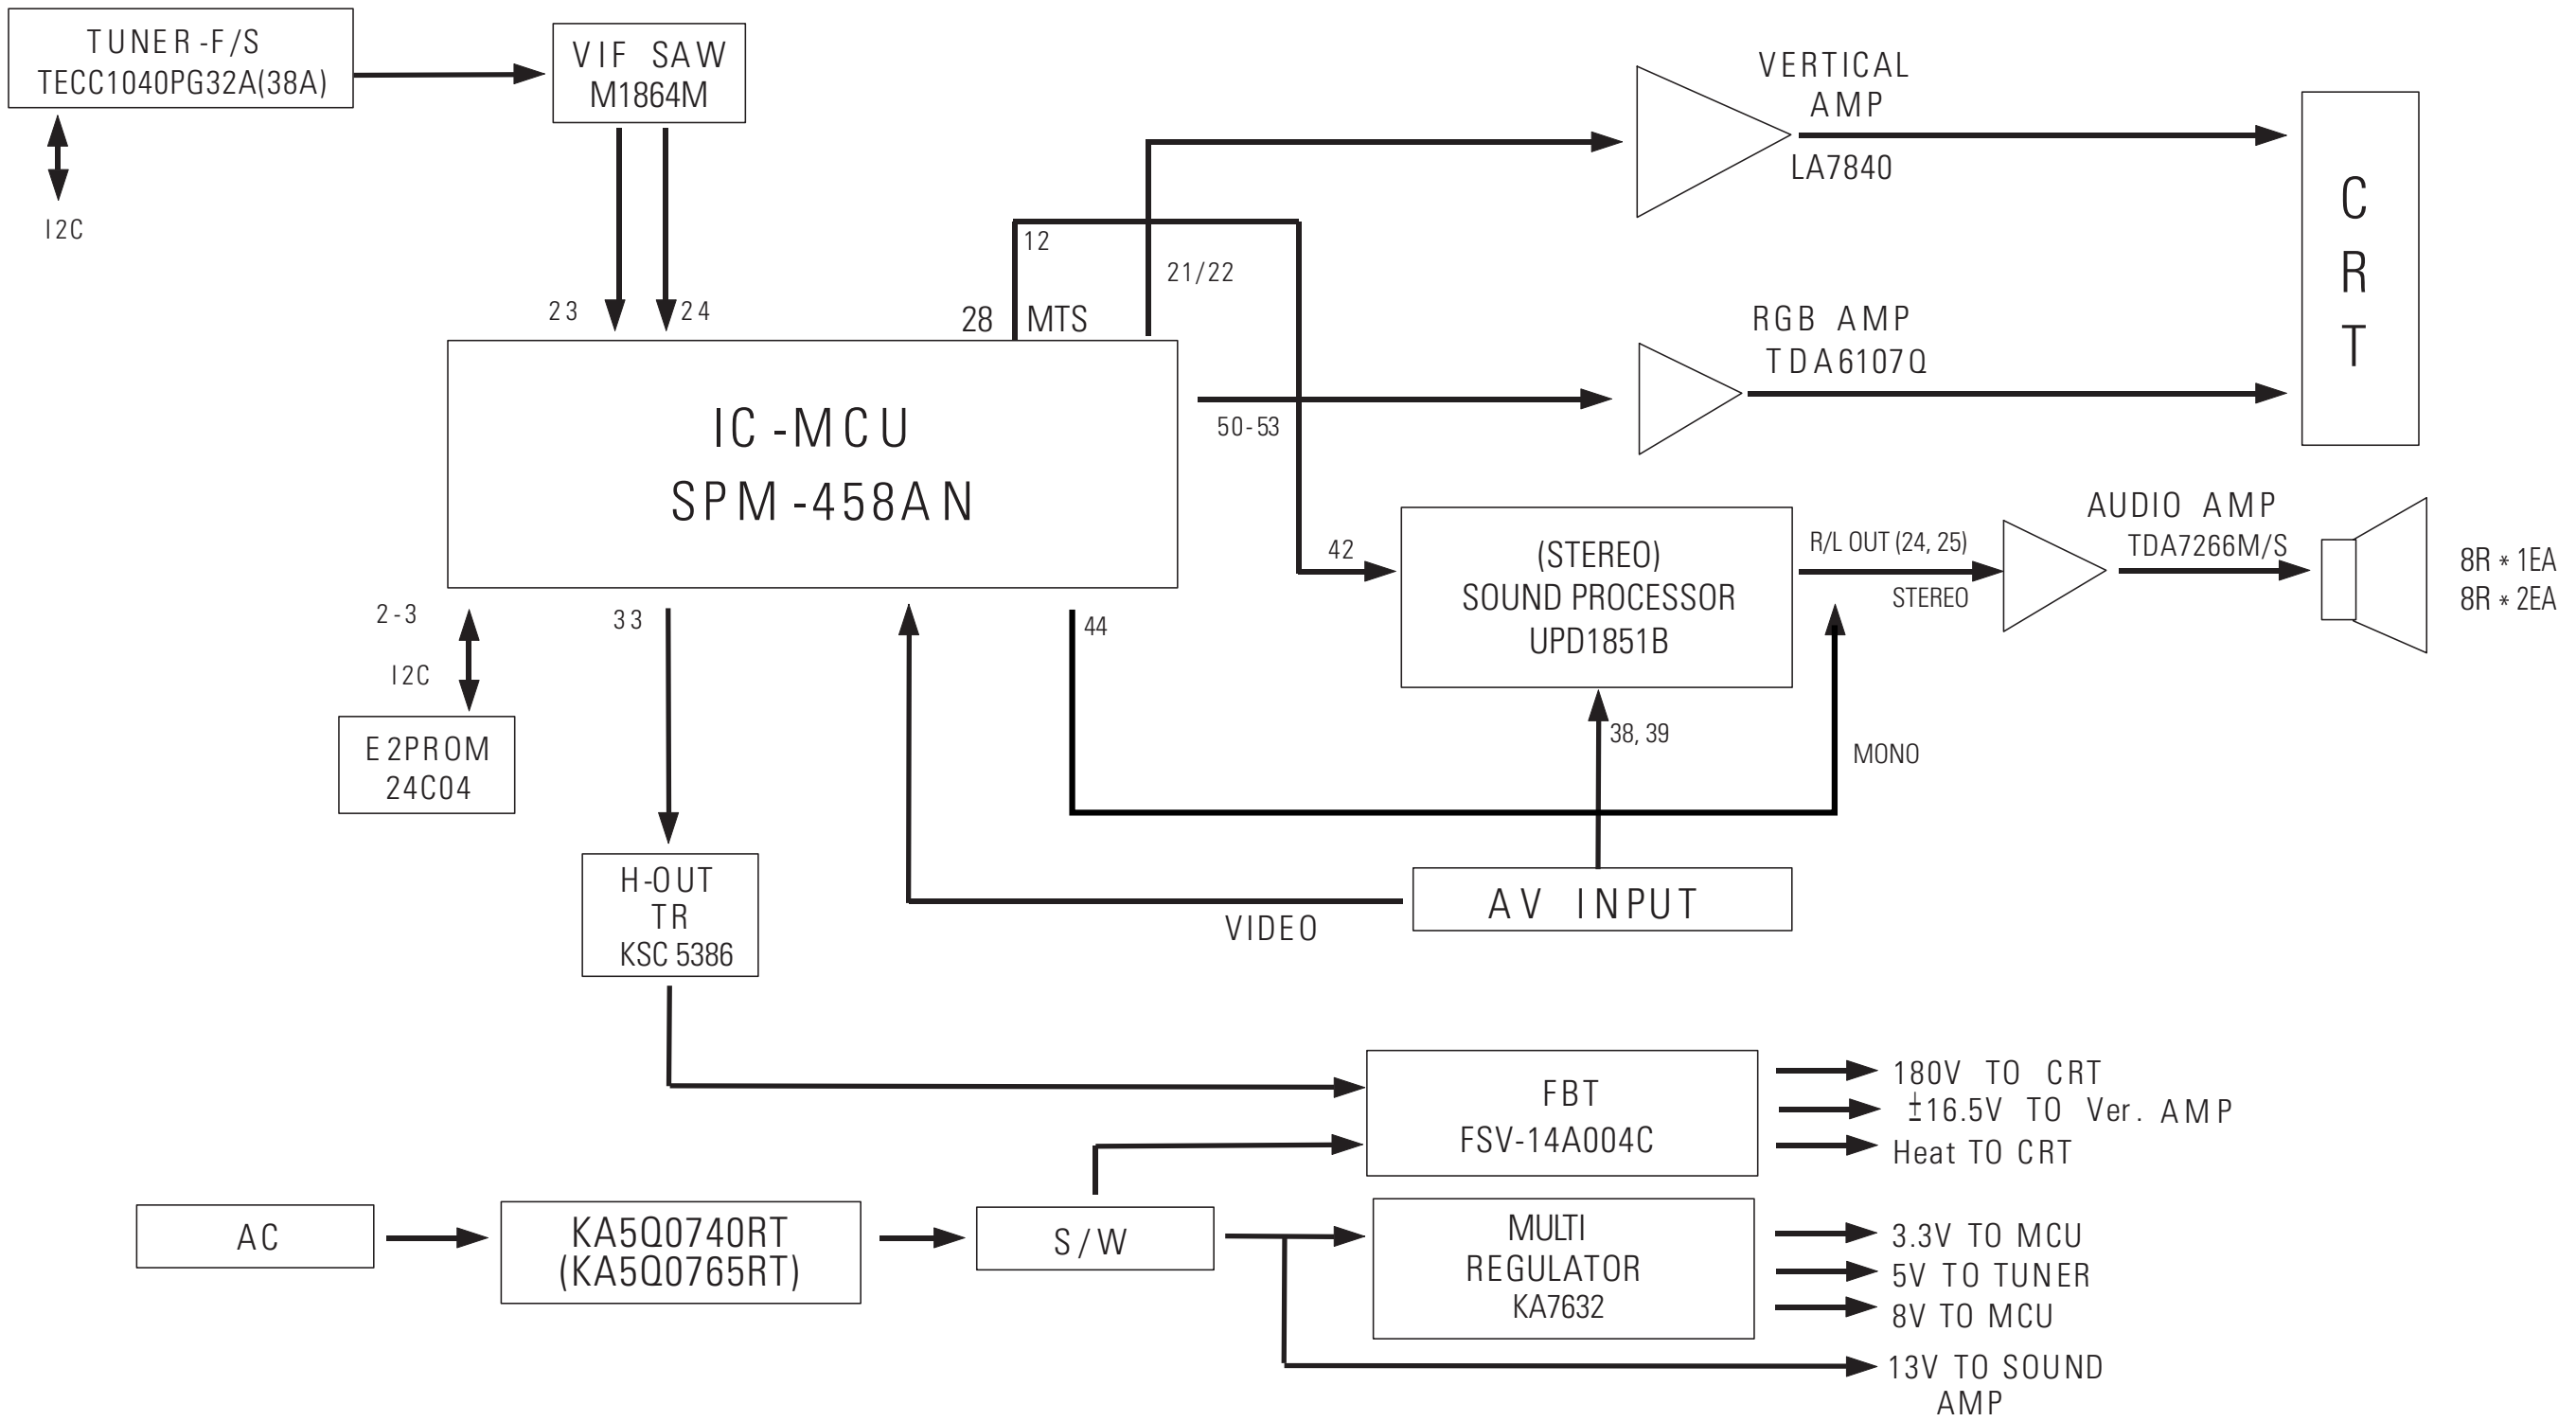

9. Wiring Diagram



9-1 K15D

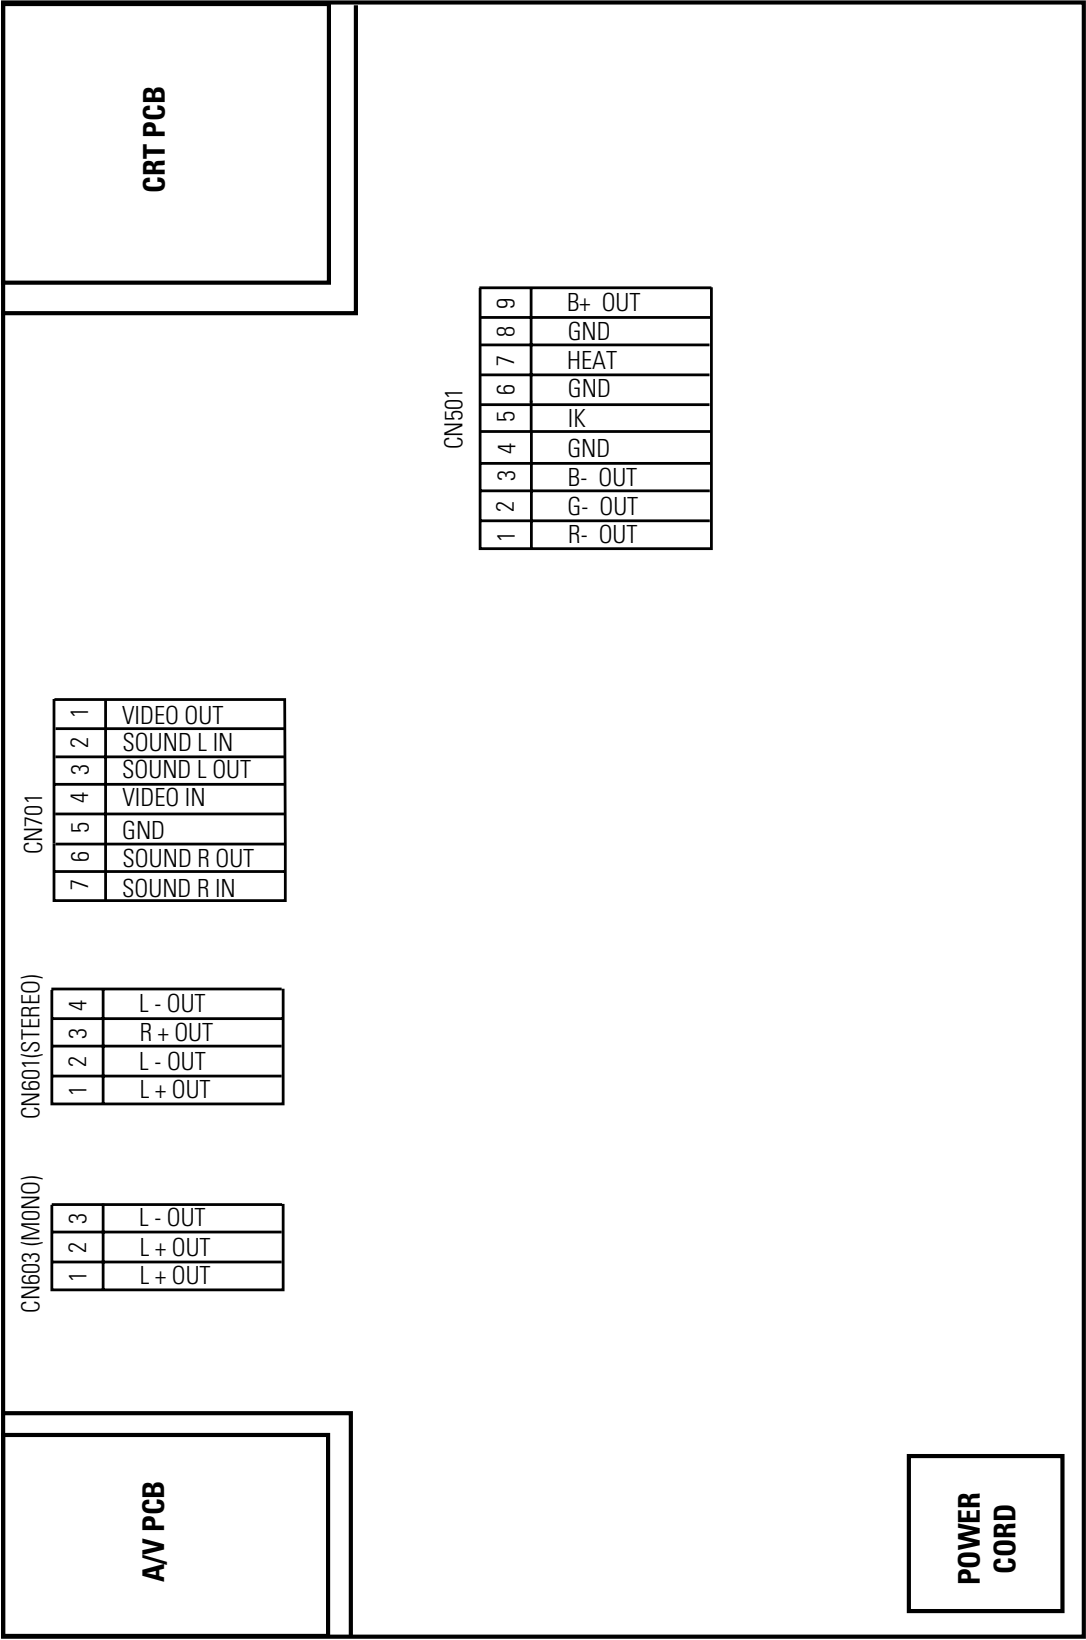

MEMO




10. Schematic Diagrams

10-1 MAIN (1/4)

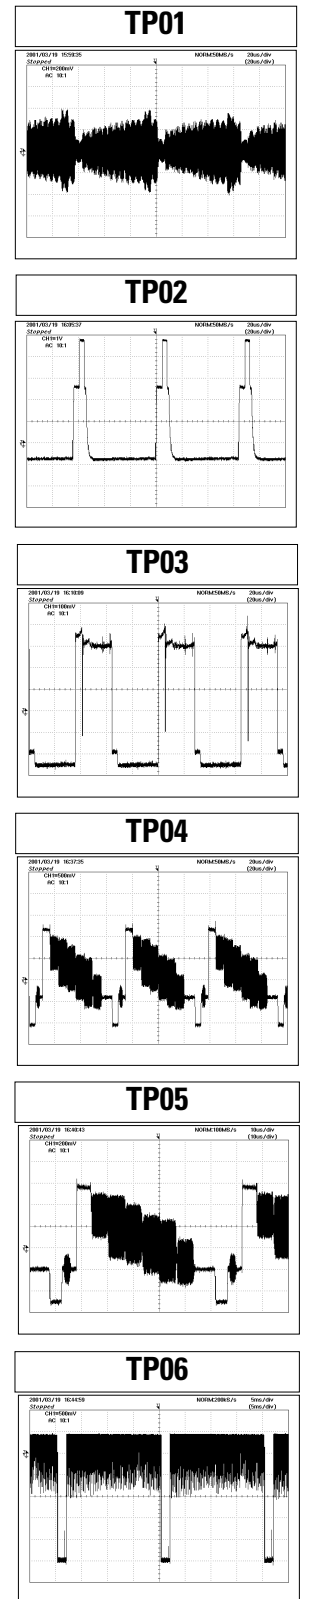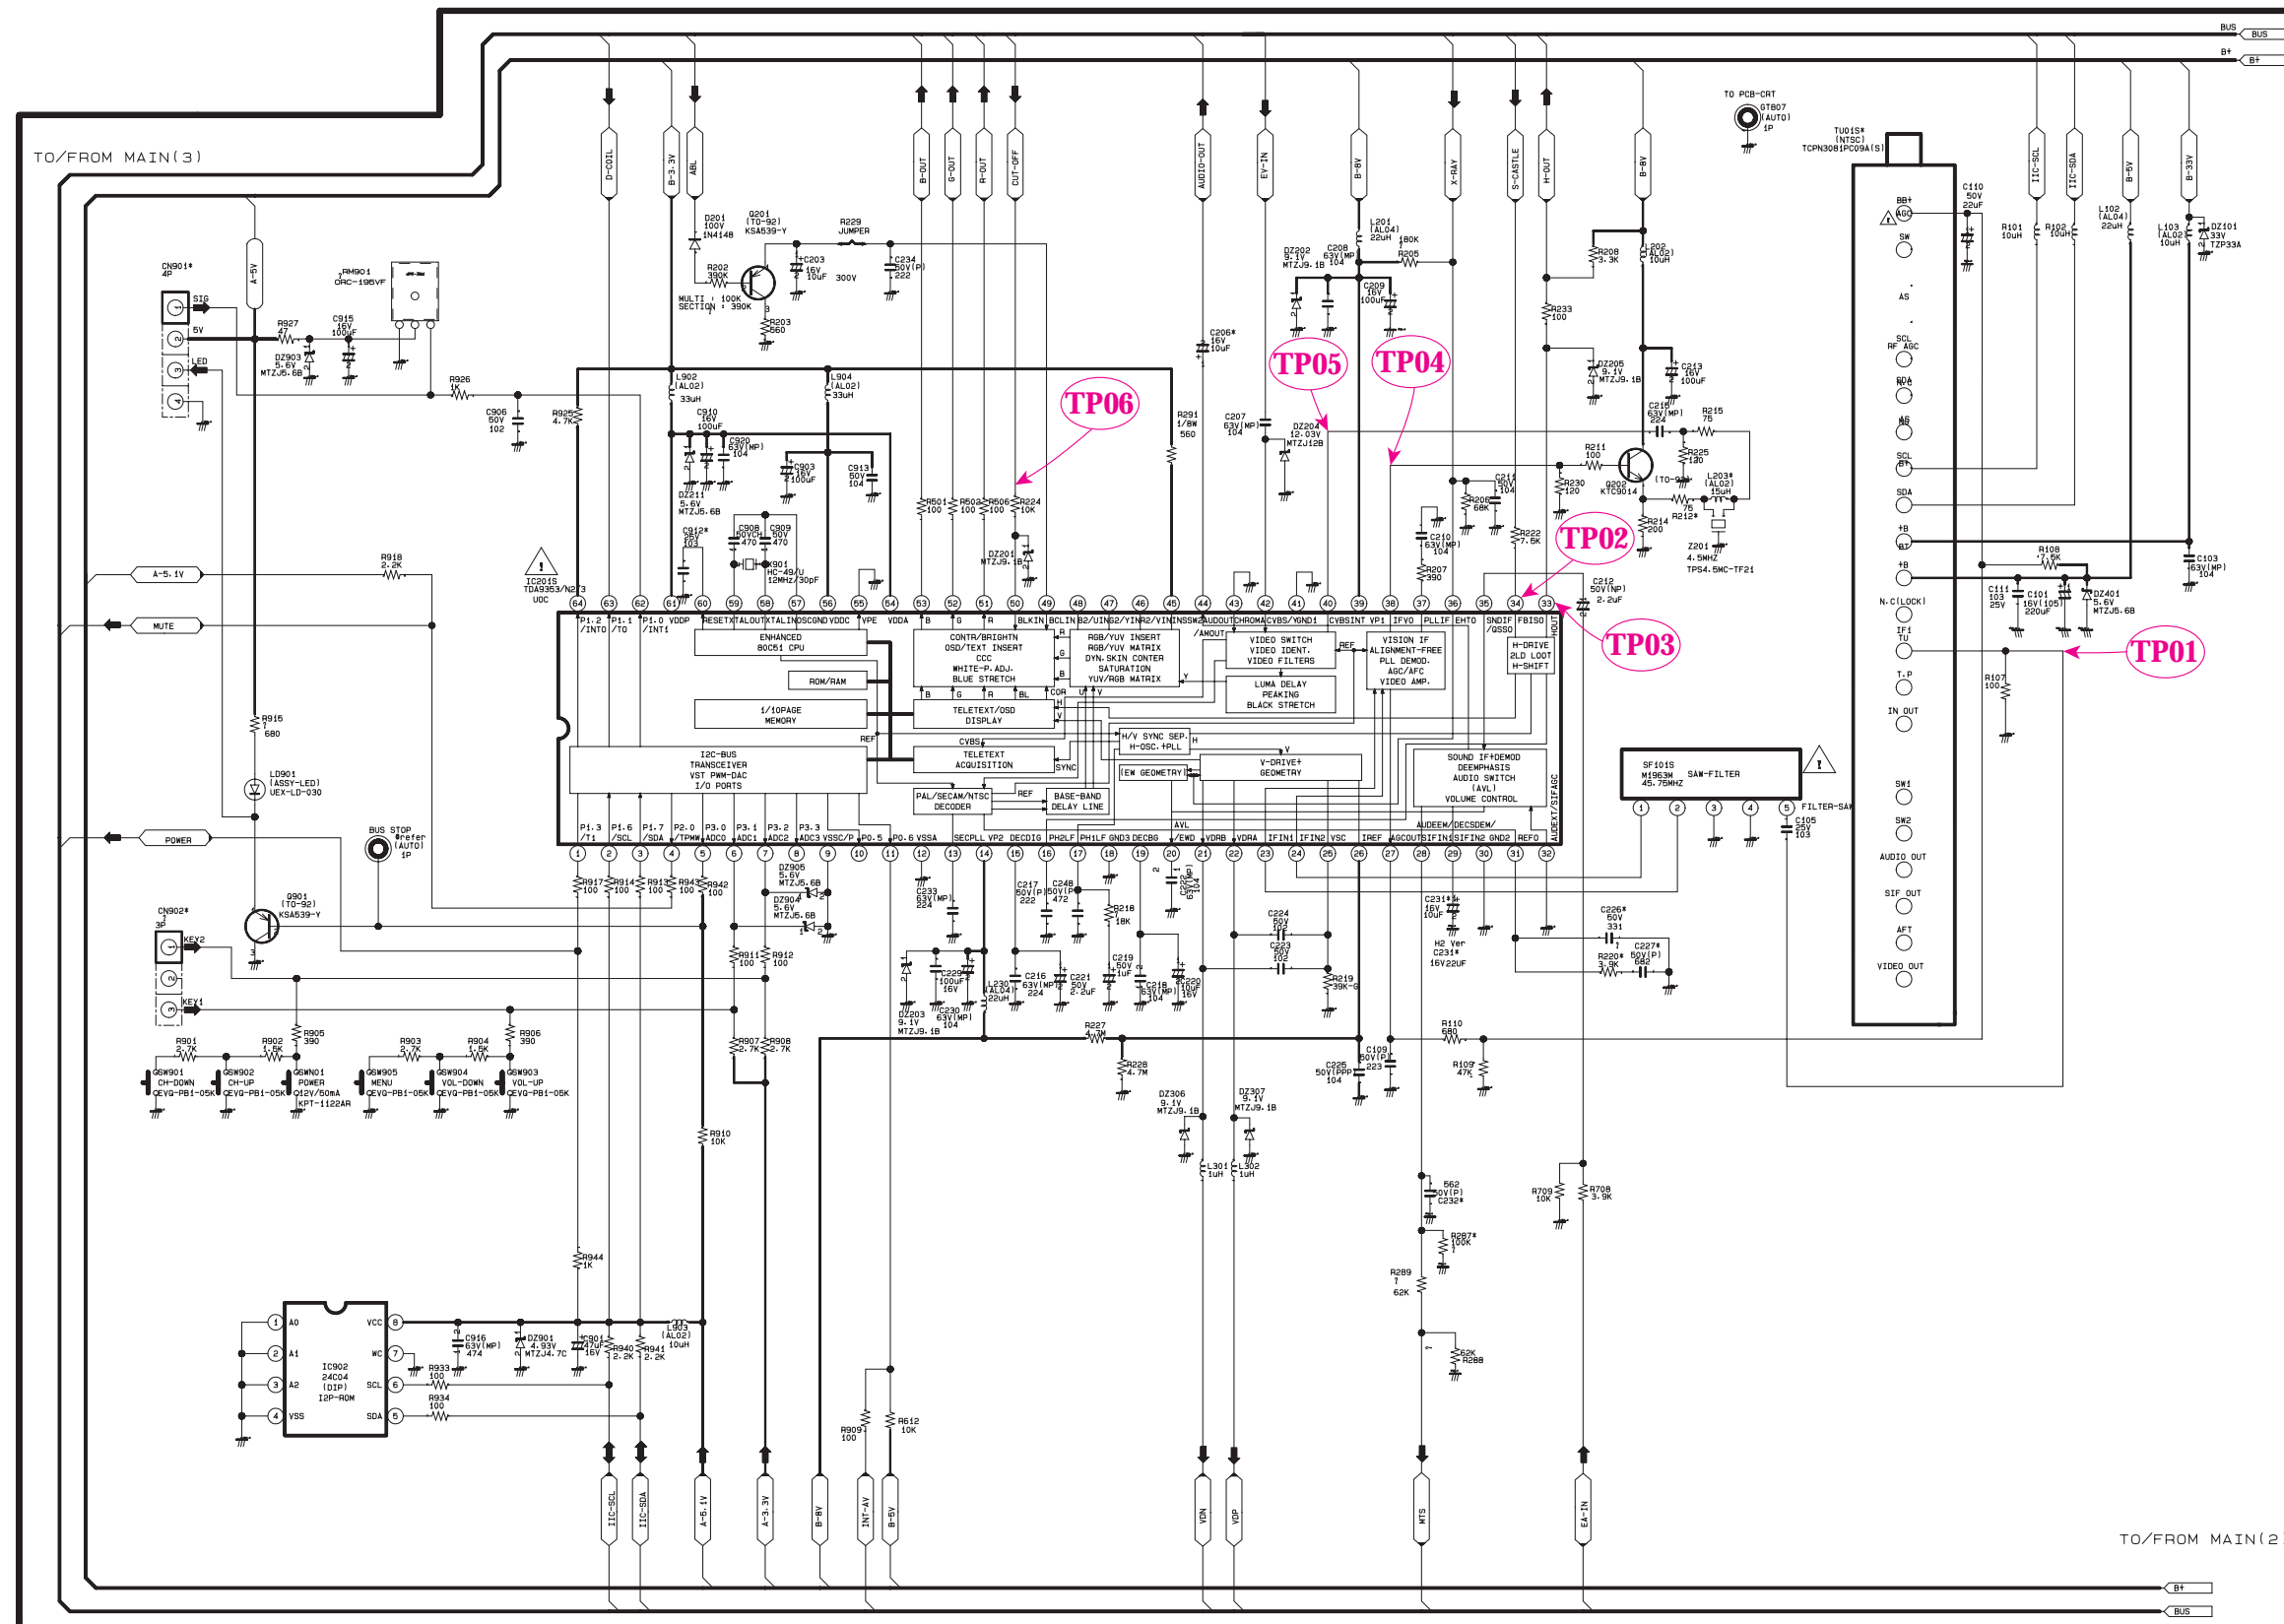



10-3 MAIN (3/4)

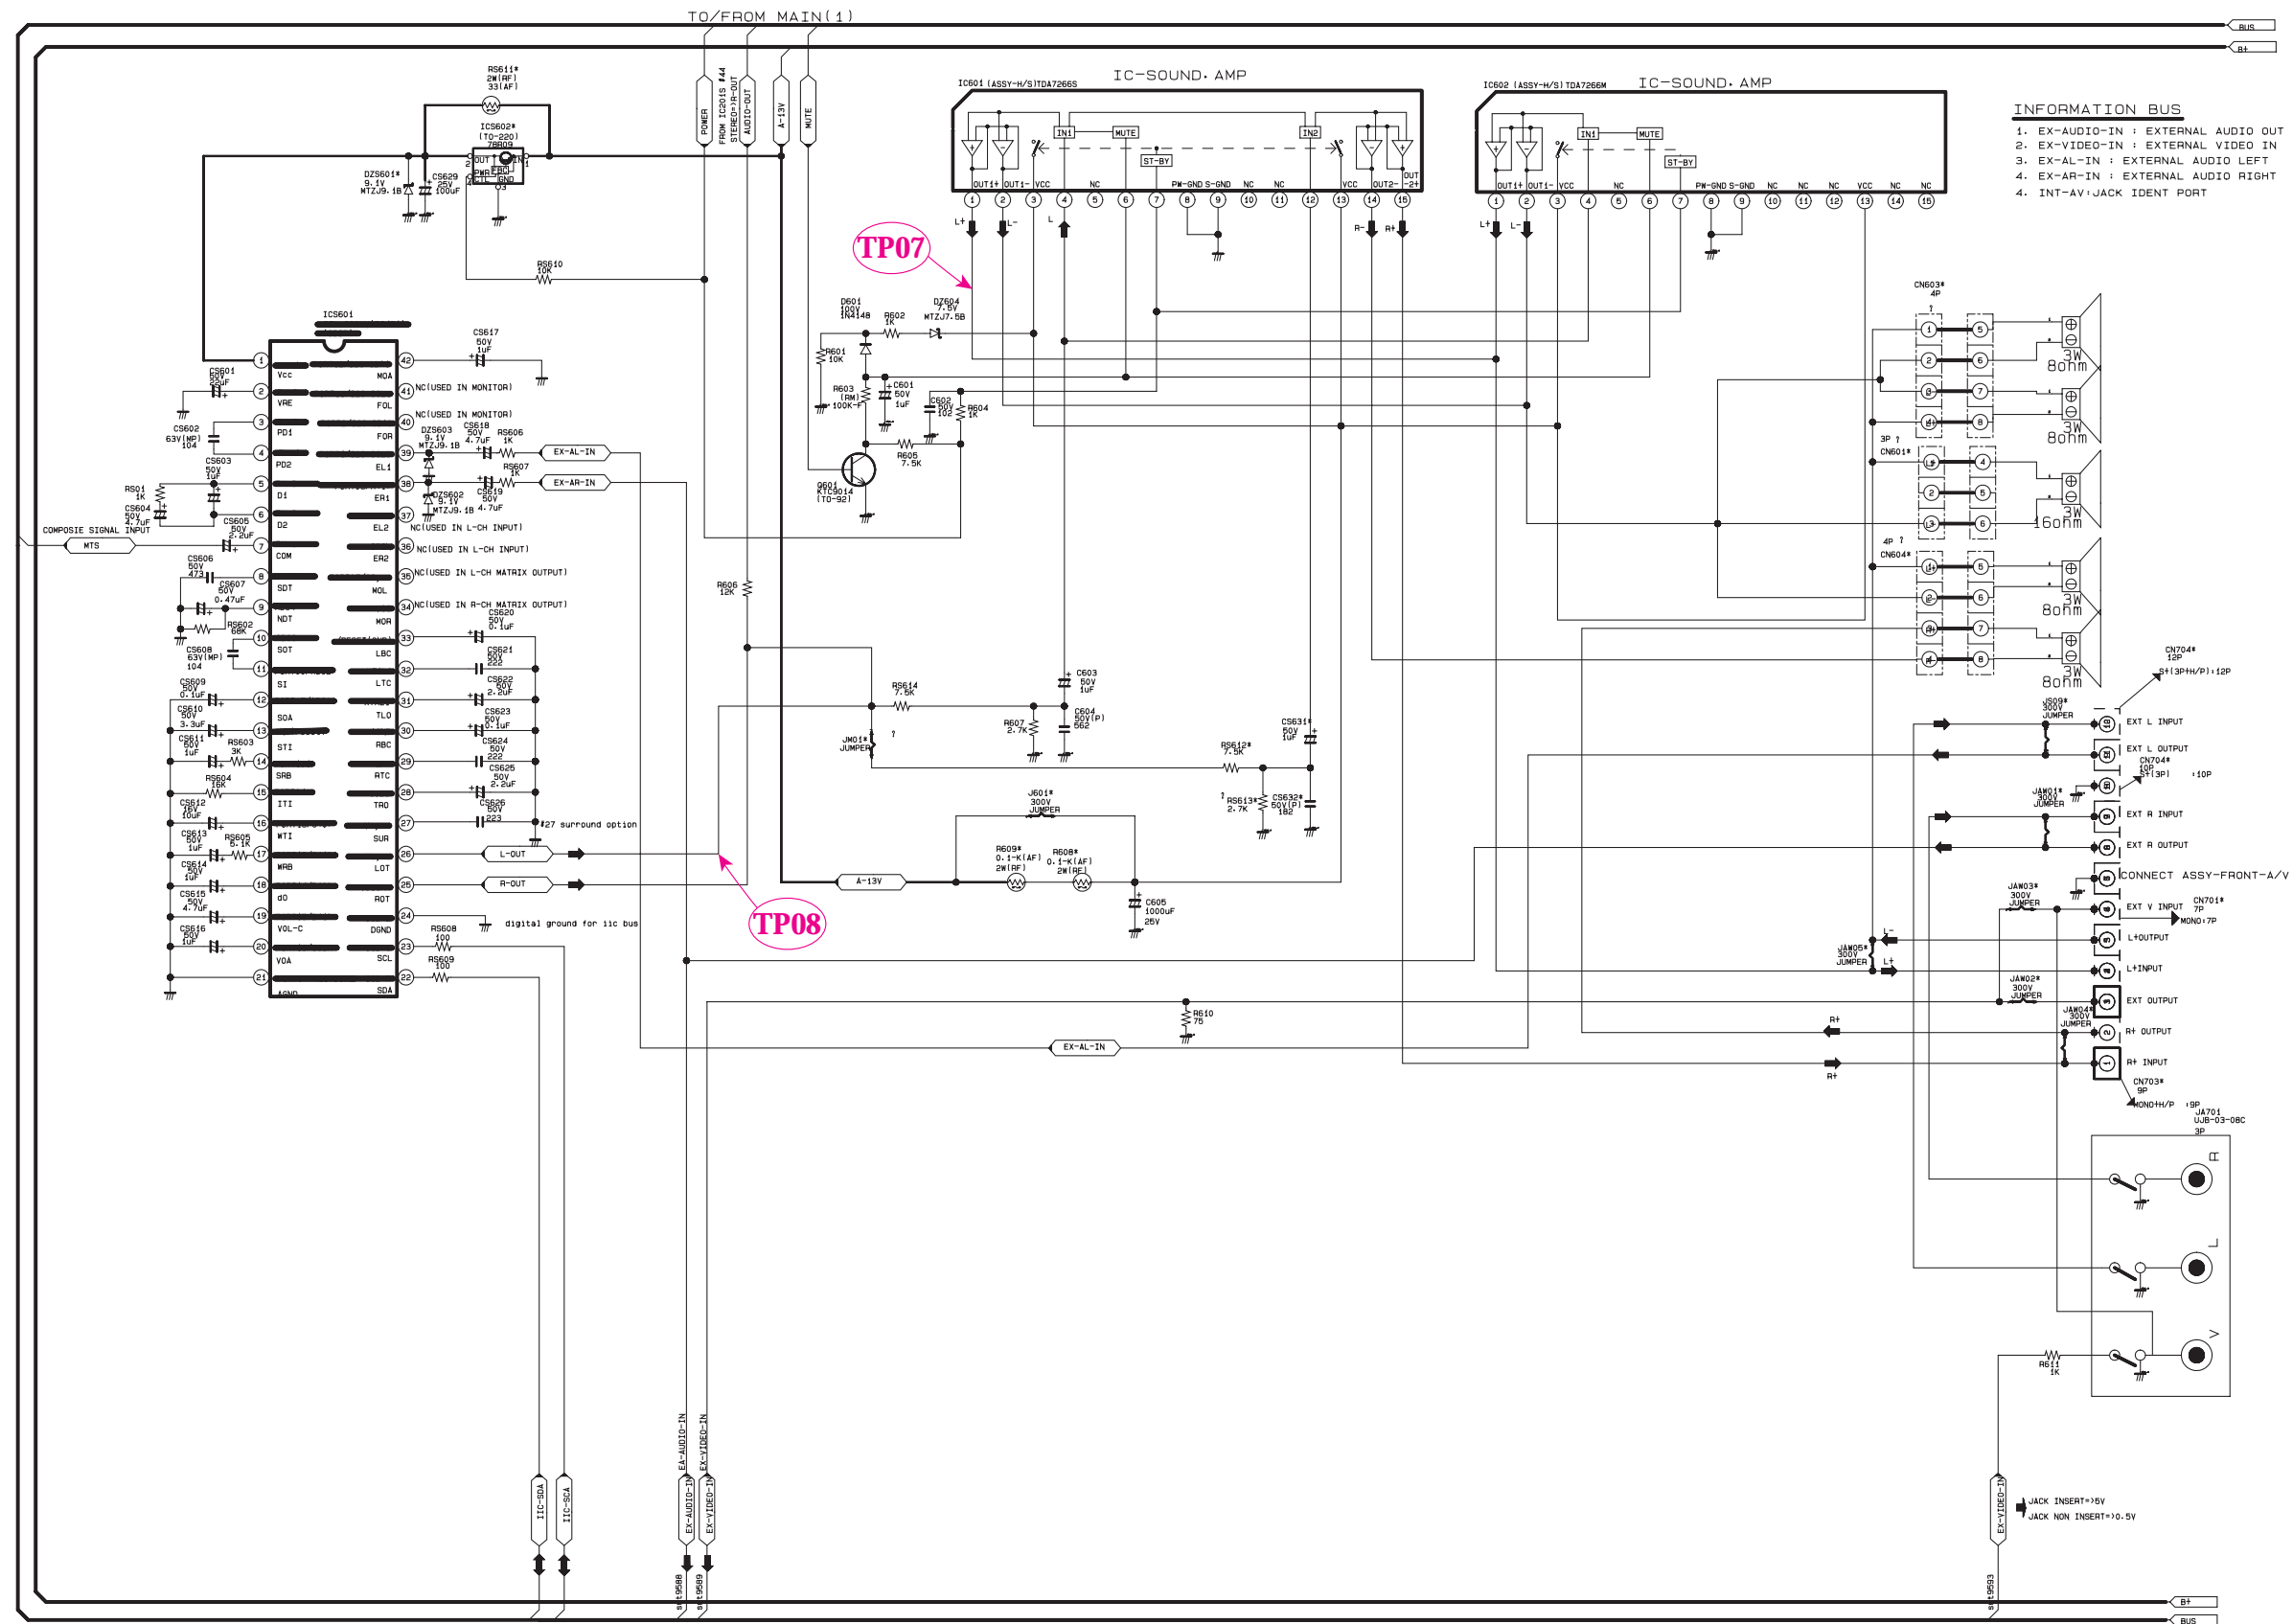

 : Power Line
 : Signal Line

